



Leading Through Innovation

**HSS-E**

# YG TAP ALU

## YG TAP Aluminium

- For long-chipping Aluminum Wrought Alloys with Large Chip Gullets to Avoid Clogging in the Threading Operations
- Für langspanende Aluminium-Knetlegierungen mit großen Spanabständen zur Vermeidung von Verstopfungen beim Gewindeschneiden.

SELECTION GUIDE



HSS-E YG TAP ALU

For long-chipping Aluminum Wrought Alloys with Large Chip Gullets to Avoid Clogging in the Threading Operations

Please visit globalyg1.com/mat for material search. Recommended cutting conditions : p.B248

Table with columns: ISO, VDI 3323, Material Description, Composition / Structure / Heat Treatment, HB, HRc. Rows include P (Non-alloy steel, Low alloy steel, High alloyed steel), M (Stainless steel), K (Grey cast iron, Nodular cast iron, Malleable cast iron), N (Aluminum-wrought alloy, Aluminum-cast, Copper and Copper Alloys, Non Metallic Materials), S (Heat Resistant Super Alloys, Titanium Alloys), H (Hardened steel, Chilled Cast Iron, Hardened Cast Iron).

Table with columns: HOLE TYPE, TOOL MATERIAL, CHAMFER LEAD ACC. TO DIN2197, FLUTE TYPE, SPIRAL FLUTE ANGLE, SERIES, SURFACE TREATMENT, MODEL. Includes icons for Max. 2.5xD Blind Hole and Max. 3.0xD Through Hole.

Table with columns: HOLE TYPE, TOOL MATERIAL, CHAMFER LEAD ACC. TO DIN2197, FLUTE TYPE, SPIRAL FLUTE ANGLE, SERIES, SURFACE TREATMENT, MODEL. Includes icons for Max. 2.0xD Blind/Through Hole.



TC163 SERIES



**M** ISO metric coarse threads DIN 13

- Metrisches ISO-Gewinde DIN 13
- ISO MÉTRIQUE DIN13
- ISO Metrico passo grosso DIN 13

Machine taps  
Maschinengewindebohrer

► Suitable for tapping blind holes due to special flute geometry and excellent chip evacuation.

► Geeignet zum Gewinden von Sacklöchern dank besonderer Nutengeometrie und ausgezeichneter Spanabfuhr.

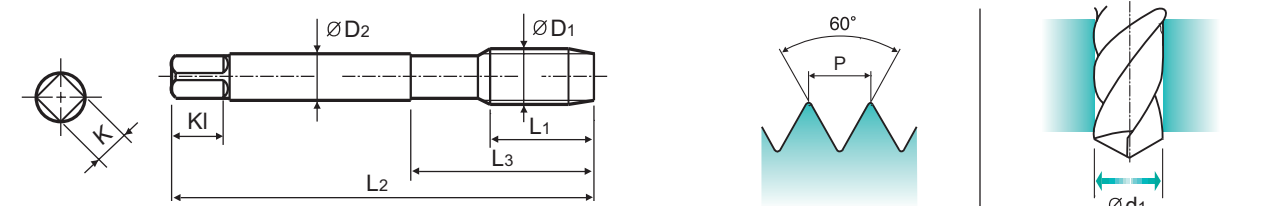

Material groups: AI, HSS-E, DIN 371/376, 6H, 60°, C, R45, Bright, p.B248, Plain Shank, TAPPING ER CHUCK, TAPPING CHUCK, ONE STEP TAPPING CHUCK, Recommended ToolHolder

Unit : mm

SIZE	Pitch	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD1	P	Bright	L1	L2	L3	ØD2	K	KI	Z	Ød1
M2	× 0.4	TC163136	8	45	13	2.8	2.1	5	2	1.6
M2.2	× 0.45	TC163156	8	45	13	2.8	2.1	5	2	1.75
*M2.3	× 0.4	TC163196	8	45	13	2.8	2.1	5	2	1.9
M2.5	× 0.45	TC163176	9	50	15	2.8	2.1	5	2	2.05
*M2.6	× 0.45	TC163496	9	50	15	2.8	2.1	5	2	2.1
M3	× 0.5	TC163206	6	56	18	3.5	2.7	6	2	2.5
M3.5	× 0.6	TC163226	7	56	20	4	3	6	2	2.9
M4	× 0.7	TC163246	7	63	21	4.5	3.4	6	2	3.3
M4.5	× 0.75	TC163266	8	70	25	6	4.9	8	2	3.7
M5	× 0.8	TC163286	8	70	25	6	4.9	8	2	4.2
M6	× 1.0	TC163316	10	80	30	6	4.9	8	2	5
M7	× 1.0	TC163346	10	80	30	7	5.5	8	2	6
M8	× 1.25	TC163366	13	90	35	8	6.2	9	2	6.8
M9	× 1.25	TC163396	13	90	35	9	7	10	2	7.8
M10	× 1.5	TC163426	15	100	39	10	8	11	2	8.5
M11	× 1.5	TC163466	17	100	40	8	6.2	9	2	9.5
M12	× 1.75	TC163506	18	110	44	9	7	10	2	10.2
M14	× 2.0	TC163546	20	110	44	11	9	12	3	12
M16	× 2.0	TC163606	20	110	44	12	9	12	3	14
M18	× 2.5	TC163656	25	125	50	14	11	14	3	15.5
M20	× 2.5	TC163706	25	140	54	16	12	15	3	17.5
M22	× 2.5	TC163746	25	140	54	18	14.5	17	3	19.5
M24	× 3.0	TC163786	30	160	60	18	14.5	17	3	21
M27	× 3.0	TC163866	30	160	60	20	16	19	3	24
M30	× 3.5	TC163946	35	180	70	22	18	21	3	26.5

► DIN 371(M2~M10) and DIN 376(M11~M30)

► \* DIN profile not ISO

◎ : Excellent ○ : Good

ISO	P										M						K					
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	

ISO	N										S						H							
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41			
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	55	60	42	42	55	21			
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550			
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎		



TE953 SERIES



**M** ISO metric coarse threads DIN 13

- Metrisches ISO-Gewinde DIN 13
- ISO MÉTRIQUE DIN13
- ISO Metrico passo grosso DIN 13

Machine taps  
Maschinengewindebohrer

► Suitable for tapping blind holes due to special flute geometry and excellent chip evacuation.

► Geeignet zum Gewinden von Sacklöchern dank besonderer Nutengeometrie und ausgezeichneter Spanabfuhr.

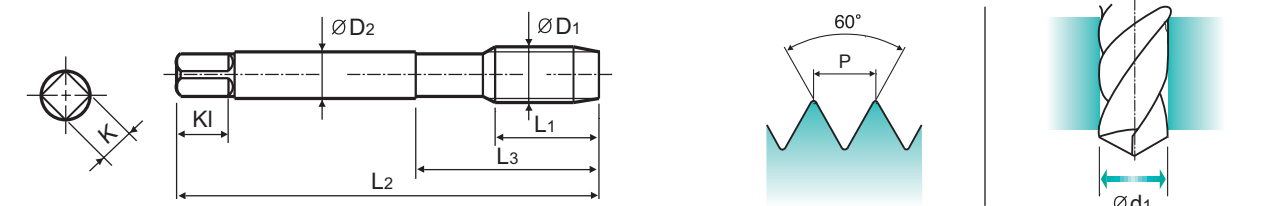

Material groups: AI, HSS-E, DIN 371/376, 6H, 60°, C, R40, Nitride, p.B248, Plain Shank, TAPPING ER CHUCK, TAPPING CHUCK, ONE STEP TAPPING CHUCK, Recommended ToolHolder

Unit : mm

SIZE	Pitch	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD1	P	Ni	L1	L2	L3	ØD2	K	KI	Z	Ød1
M2	× 0.4	TE953136	8	45	13	2.8	2.1	5	2	1.6
M2.2	× 0.45	TE953156	8	45	13	2.8	2.1	5	2	1.75
*M2.3	× 0.4	TE953196	8	45	13	2.8	2.1	5	2	1.9
M2.5	× 0.45	TE953176	9	50	15	2.8	2.1	5	2	2.05
*M2.6	× 0.45	TE953496	9	50	15	2.8	2.1	5	2	2.1
M3	× 0.5	TE953206	6	56	18	3.5	2.7	6	2	2.5
M3.5	× 0.6	TE953226	7	56	20	4	3	6	2	2.9
M4	× 0.7	TE953246	7	63	21	4.5	3.4	6	2	3.3
M4.5	× 0.75	TE953266	8	70	25	6	4.9	8	2	3.7
M5	× 0.8	TE953286	8	70	25	6	4.9	8	2	4.2
M6	× 1.0	TE953316	10	80	30	6	4.9	8	2	5
M7	× 1.0	TE953346	10	80	30	7	5.5	8	2	6
M8	× 1.25	TE953366	13	90	35	8	6.2	9	2	6.8
M9	× 1.25	TE953396	13	90	35	9	7	10	3	7.8
M10	× 1.5	TE953426	15	100	39	10	8	11	3	8.5
M11	× 1.5	TE953466	17	100	40	8	6.2	9	3	9.5
M12	× 1.75	TE953506	18	110	44	9	7	10	3	10.2
M14	× 2.0	TE953546	20	110	44	11	9	12	3	12
M16	× 2.0	TE953606	20	110	44	12	9	12	3	14
M18	× 2.5	TE953656	25	125	50	14	11	14	4	15.5
M20	× 2.5	TE953706	25	140	54	16	12	15	4	17.5
M22	× 2.5	TE953746	25	140	54	18	14.5	17	4	19.5
M24	× 3.0	TE953786	30	160	60	18	14.5	17	4	21
M27	× 3.0	TE953866	30	160	60	20	16	19	4	24
M30	× 3.5	TE953946	35	180	70	22	18	21	4	26.5

► DIN 371(M2~M10) and DIN 376(M11~M30)

► \* DIN profile not ISO

◎ : Excellent ○ : Good

ISO	P										M						K					
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	

ISO	N										S						H							
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41			
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	55	60	42	42	55	21			
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550			
Recommended	○	○	○	○	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎		





TC963 SERIES





# MF ISO metric fine threads DIN 13

● Metrisches ISO-Feingewinde DIN 13  
● ISO MÉTRIQUE PAS FINS DIN13  
● ISO Metrico passo fine DIN 13

Machine taps  
Maschinengewindebohrer

► Suitable for tapping blind holes due to special flute geometry and excellent chip evacuation.

► Geeignet zum Gewinden von Sacklöchern dank besonderer Nutengeometrie und ausgezeichneter Spanabfuhr.

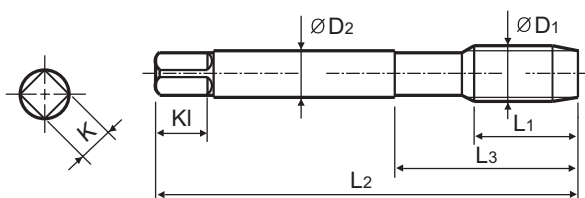

Material groups: **AI** HSS-E **DIN 374** **6H** **60°** **C** **R45** Bright p.B248

Recommended ToolHolder: Plain Shank TAPPING ER CHUCK TAPPING CHUCK ONE STEP TAPPING CHUCK

Unit : mm

SIZE	Pitch	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD1	P	Bright	L1	L2	L3	ØD2	K	KI	Z	Ød1
M4	× 0.5	TC963256	5	63	21	2.8	2.1	5	2	3.5
M5	× 0.5	TC963296	5	70	25	3.5	2.7	6	2	4.5
M6	× 0.75	TC963326	8	80	30	4.5	3.4	6	2	5.2
M6	× 0.5	TC963336	5	80	30	4.5	3.4	6	2	5.5
M7	× 0.75	TC963356	10	80	30	5.5	4.3	7	2	6.2
M8	× 1.0	TC963376	10	90	36	6	4.9	8	2	7
M8	× 0.75	TC963386	8	80	30	6	4.9	8	2	7.2
M10	× 1.25	TC963436	16	100	40	7	5.5	8	2	8.8
M10	× 1.0	TC963446	10	90	36	7	5.5	8	2	9
M10	× 0.75	TC963456	10	90	36	7	5.5	8	2	9.2
M12	× 1.5	TC963516	15	100	40	9	7	10	2	10.5
M12	× 1.25	TC963526	15	100	40	9	7	10	2	10.8
M12	× 1.0	TC963536	11	100	40	9	7	10	2	11
M14	× 1.5	TC963556	15	100	40	11	9	12	3	12.5
M14	× 1.25	TC963566	15	100	40	11	9	12	3	12.8
M16	× 1.5	TC963616	15	100	40	12	9	12	3	14.5
M18	× 1.5	TC963676	17	110	44	14	11	14	3	16.5
M20	× 1.5	TC963726	17	125	50	16	12	15	3	18.5
M22	× 1.5	TC963766	17	125	50	18	14.5	17	3	20.5
M24	× 1.5	TC963806	20	140	54	18	14.5	17	3	22.5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO Material Description	N										S						H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	55	60	42	42	55	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎



TC169 SERIES





# UNC Unified coarse threads

● Unified Grobgewinde  
● UNC  
● Unificato passo grosso

Machine taps  
Maschinengewindebohrer

► Suitable for tapping blind holes due to special flute geometry and excellent chip evacuation.

► Geeignet zum Gewinden von Sacklöchern dank besonderer Nutengeometrie und ausgezeichneter Spanabfuhr.

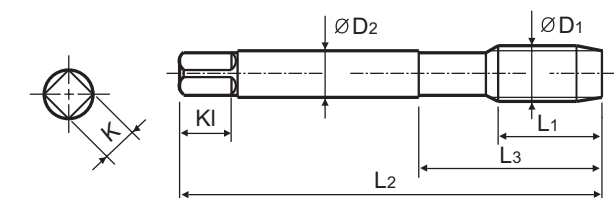

Material groups: **AI** HSS-E **DIN 371/376** **2B** **60°** **C** **R45** Bright p.B248

Recommended ToolHolder: Plain Shank TAPPING ER CHUCK TAPPING CHUCK ONE STEP TAPPING CHUCK

Unit : mm

SIZE	TPI	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD1		Bright	L1	L2	L3	ØD2	K	KI	Z	Ød1
#4	- 40UNC	TC169162	6	56	18	3.5	2.7	6	2	2.3
#5	- 40UNC	TC169202	7	56	18	3.5	2.7	6	2	2.6
#6	- 32UNC	TC169242	7	56	20	4	3	6	2	2.85
#8	- 24UNC	TC169282	8	63	21	4.5	3.4	6	2	3.5
#10	- 24UNC	TC169322	10	70	25	6	4.9	8	2	3.9
#12	- 24UNC	TC169362	10	80	30	6	4.9	8	2	4.5
1/4	- 20UNC	TC169402	13	80	30	7	5.5	8	2	5.2
5/16	- 18UNC	TC169442	14	90	35	8	6.2	9	2	6.6
3/8	- 16UNC	TC169482	16	100	39	9	7	10	2	8
7/16	- 14UNC	TC169522	17	100	40	8	6.2	9	2	9.4
1/2	- 13UNC	TC169562	20	110	44	9	7	10	2	10.75
9/16	- 12UNC	TC169602	20	110	44	11	9	12	3	12.25
5/8	- 11UNC	TC169642	22	110	44	12	9	12	3	13.5
3/4	- 10UNC	TC169702	25	125	50	14	11	14	3	16.5
7/8	- 9UNC	TC169742	27	140	54	18	14.5	17	3	19.5
1	- 8UNC	TC169782	30	160	60	20	16	19	3	22.25
1-1/8	- 7UNC	TC169822	35	180	65	22	18	21	3	25

► DIN 371(#4~3/8) and DIN 376(7/16~1-1/8)

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO Material Description	N										S						H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	55	60	42	42	55	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎



TC170 SERIES




# UNF Unified fine threads

- Unified Feingewinde
- UNF
- Unificato passo fine

Machine taps  
Maschinengewindebohrer

► Suitable for tapping blind holes due to special flute geometry and excellent chip evacuation.

► Geeignet zum Gewinden von Sacklöchern dank besonderer Nutengeometrie und ausgezeichneter Spanabfuhr.

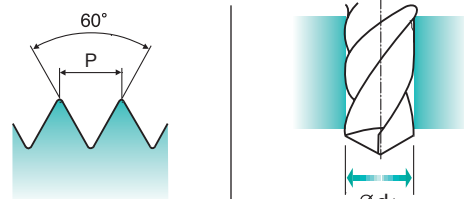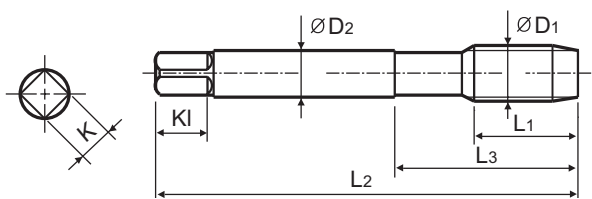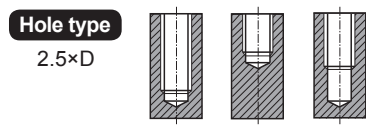

Material groups: AI, HSS-E, DIN 371/374, 2B, 60°, C, R45, Bright, p.B248

Recommended ToolHolder: Plain Shank TAPPING ER CHUCK, TAPPING CHUCK, ONE STEP TAPPING CHUCK

SIZE	TPI	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD1		Bright	L1	L2	L3	ØD2	K	KI	Z	Ød1
#4 - 48UNF		TC170182	6	56	18	3.5	2.7	6	2	2.4
#5 - 44UNF		TC170222	7	56	18	3.5	2.7	6	2	2.7
#6 - 40UNF		TC170262	7	56	20	4	3	6	2	3
#8 - 36UNF		TC170302	8	63	21	4.5	3.4	6	2	3.5
#10 - 32UNF		TC170342	10	70	25	6	4.9	8	2	4.1
#12 - 28UNF		TC170382	10	80	30	6	4.9	8	2	4.7
1/4 - 28UNF		TC170422	10	80	30	7	5.5	8	2	5.5
5/16 - 24UNF		TC170462	10	90	35	8	6.2	9	2	6.9
3/8 - 24UNF		TC170502	10	100	39	9	7	10	2	8.5
7/16 - 20UNF		TC170542	13	100	40	8	6.2	9	2	9.9
1/2 - 20UNF		TC170582	13	100	40	9	7	10	2	11.5
9/16 - 18UNF		TC170622	15	100	40	11	9	12	3	12.9
5/8 - 18UNF		TC170662	15	100	40	12	9	12	3	14.5
3/4 - 16UNF		TC170722	17	110	44	14	11	14	3	17.5
7/8 - 14UNF		TC170762	17	125	50	18	14.5	17	3	20.5
1 - 12UNF		TC170802	20	140	54	18	14.5	17	3	23.25
1-1/8 - 12UNF		TC170842	22	150	60	22	18	21	3	26.5

► DIN 371(#4~3/8) and DIN 374(7/16~1-1/8)

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○	○	○																	

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	◎	◎																	



TC622 SERIES




# M-Az ISO metric coarse threads DIN 13

- Metrisches ISO-Gewinde DIN 13
- ISO MÉTRIQUE DIN13
- ISO Metrico passo grosso DIN 13

Machine taps  
Maschinengewindebohrer

► Interrupted tap to reduce contact area and tapping torque, and to give more chip space.

► Gewindebohrer mit ausgesetzten Zähnen um die Kontaktzone mit dem Werkstück und das Drehmoment zu minimieren und dem Span mehr Raum zu geben.

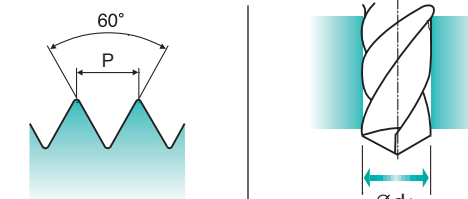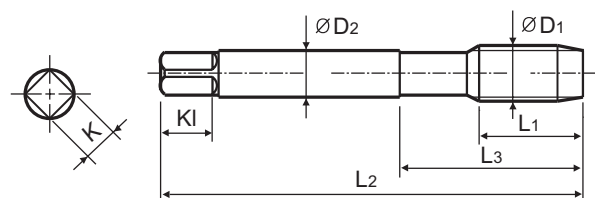

Material groups: AI, HSS-E, DIN 371/376, 6H, 60°, B, Bright, p.B248

Recommended ToolHolder: Plain Shank TAPPING ER CHUCK, TAPPING CHUCK, ONE STEP TAPPING CHUCK

SIZE	Pitch	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD1	P	Bright	L1	L2	L3	ØD2	K	KI	Z	Ød1
M2 × 0.4		TC622136	8	45	13	2.8	2.1	5	3	1.6
M2.2 × 0.45		TC622156	8	45	13	2.8	2.1	5	3	1.75
*M2.3 × 0.4		TC622196	8	45	13	2.8	2.1	5	3	1.9
M2.5 × 0.45		TC622176	9	50	15	2.8	2.1	5	3	2.05
*M2.6 × 0.45		TC622496	9	50	15	2.8	2.1	5	3	2.1
M3 × 0.5		TC622206	11	56	18	3.5	2.7	6	3	2.5
M3.5 × 0.6		TC622226	12	56	20	4	3	6	3	2.9
M4 × 0.7		TC622246	13	63	21	4.5	3.4	6	3	3.3
M4.5 × 0.75		TC622266	14	70	25	6	4.9	8	3	3.7
M5 × 0.8		TC622286	15	70	25	6	4.9	8	3	4.2
M6 × 1.0		TC622316	17	80	30	6	4.9	8	3	5
M7 × 1.0		TC622346	17	80	30	7	5.5	8	3	6
M8 × 1.25		TC622366	20	90	35	8	6.2	9	3	6.8
M9 × 1.25		TC622396	20	90	35	9	7	10	3	7.8
M10 × 1.5		TC622426	22	100	39	10	8	11	3	8.5
M11 × 1.5		TC622466	22	100	40	8	6.2	9	3	9.5
M12 × 1.75		TC622506	24	110	44	9	7	10	3	10.2
M14 × 2.0		TC622546	26	110	44	11	9	12	3	12
M16 × 2.0		TC622606	27	110	44	12	9	12	3	14
M18 × 2.5		TC622656	30	125	50	14	11	14	3	15.5
M20 × 2.5		TC622706	32	140	54	16	12	15	3	17.5
M22 × 2.5		TC622746	32	140	54	18	14.5	17	3	19.5
M24 × 3.0		TC622786	34	160	60	18	14.5	17	3	21
M27 × 3.0		TC622866	36	160	60	20	16	19	3	24
M30 × 3.5		TC622946	40	180	70	22	18	21	3	26.5

► DIN 371(M2~M10) and DIN 376(M11~M30)

► \* DIN profile not ISO

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○	○	○																	

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	◎	◎																	







TE443 SERIES




**M** ISO metric coarse threads DIN 13

- Metrisches ISO-Gewinde DIN 13
- ISO MÉTRIQUE DIN13
- ISO Metrico passo grosso DIN 13

Machine taps  
Maschinengewindebohrer

► Suitable for brass and short chip work materials.

► Geeignet zum Gewindeschneiden von Messing und anderen kurzspanenden Werkstoffen

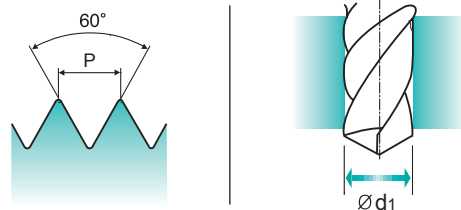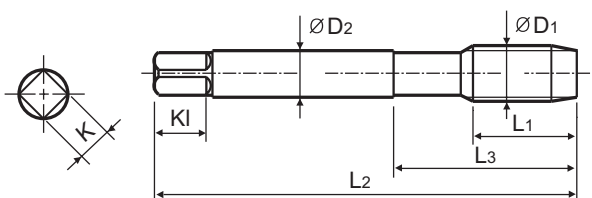

Material groups: **Ms** HSS-E DIN 371/376 6HX 60° C Nitride p.B248

Recommended ToolHolder: Plain Shank TAPPING ER CHUCK ONE STEP TAPPING CHUCK

Unit : mm

SIZE	Pitch	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD1	P	Ni	L1	L2	L3	ØD2	K	KI	Z	Ød1
M2 × 0.4		TE443136	8	45	13	2.8	2.1	5	3	1.6
M2.2 × 0.45		TE443156	8	45	13	2.8	2.1	5	3	1.75
*M2.3 × 0.4		TE443196	8	45	13	2.8	2.1	5	3	1.9
M2.5 × 0.45		TE443176	9	50	15	2.8	2.1	5	3	2.05
*M2.6 × 0.45		TE443496	9	50	15	2.8	2.1	5	3	2.1
M3 × 0.5		TE443206	11	56	18	3.5	2.7	6	3	2.5
M3.5 × 0.6		TE443226	12	56	20	4	3	6	3	2.9
M4 × 0.7		TE443246	13	63	21	4.5	3.4	6	3	3.3
M4.5 × 0.75		TE443266	14	70	25	6	4.9	8	3	3.7
M5 × 0.8		TE443286	15	70	25	6	4.9	8	3	4.2
M6 × 1.0		TE443316	17	80	30	6	4.9	8	3	5
M7 × 1.0		TE443346	17	80	30	7	5.5	8	3	6
M8 × 1.25		TE443366	20	90	35	8	6.2	9	3	6.8
M9 × 1.25		TE443396	20	90	35	9	7	10	3	7.8
M10 × 1.5		TE443426	22	100	39	10	8	11	3	8.5
M11 × 1.5		TE443466	22	100	40	8	6.2	9	3	9.5
M12 × 1.75		TE443506	24	110	44	9	7	10	3	10.2
M14 × 2.0		TE443546	26	110	44	11	9	12	3	12
M16 × 2.0		TE443606	27	110	44	12	9	12	3	14
M18 × 2.5		TE443656	30	125	50	14	11	14	4	15.5
M20 × 2.5		TE443706	32	140	54	16	12	15	4	17.5
M22 × 2.5		TE443746	32	140	54	18	14.5	17	4	19.5
M24 × 3.0		TE443786	34	160	60	18	14.5	17	4	21
M27 × 3.0		TE443866	36	160	60	20	16	19	4	24
M30 × 3.5		TE443946	40	180	70	22	18	21	4	26.5

► DIN 371 (M2~M10) and DIN 376 (M11~M30)  
 ► \* DIN profile not ISO

◎ : Excellent ○ : Good

ISO Material Description	P										M						K			
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel				Grey cast iron		Nodular cast iron	Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended																				

ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	55	60	42	42	55	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended						◎	○														



TY433 SERIES




**M** ISO metric coarse threads DIN 13

- Metrisches ISO-Gewinde DIN 13
- ISO MÉTRIQUE DIN13
- ISO Metrico passo grosso DIN 13

Machine taps  
Maschinengewindebohrer

► Suitable for brass and short chip work materials.

► Geeignet zum Gewindeschneiden von Messing und anderen kurzspanenden Werkstoffen

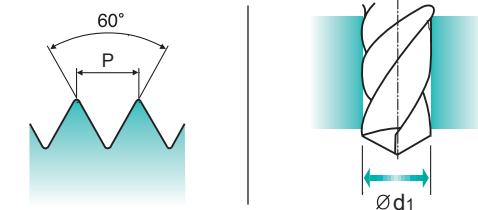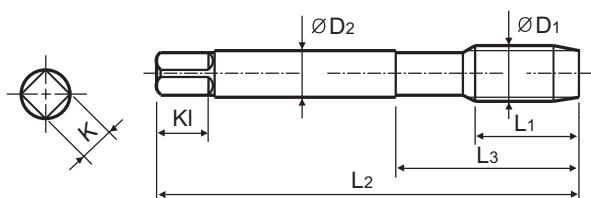

Material groups: **Ms** HSS-E DIN 371/376 6H 60° C TiAIN p.B248

Recommended ToolHolder: Plain Shank TAPPING ER CHUCK ONE STEP TAPPING CHUCK

Unit : mm

SIZE	Pitch	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD1	P	TiAIN	L1	L2	L3	ØD2	K	KI	Z	Ød1
M2 × 0.4		TY433136	8	45	13	2.8	2.1	5	3	1.6
M2.2 × 0.45		TY433156	8	45	13	2.8	2.1	5	3	1.75
*M2.3 × 0.4		TY433196	8	45	13	2.8	2.1	5	3	1.9
M2.5 × 0.45		TY433176	9	50	15	2.8	2.1	5	3	2.05
*M2.6 × 0.45		TY433496	9	50	15	2.8	2.1	5	3	2.1
M3 × 0.5		TY433206	11	56	18	3.5	2.7	6	3	2.5
M3.5 × 0.6		TY433226	12	56	20	4	3	6	3	2.9
M4 × 0.7		TY433246	13	63	21	4.5	3.4	6	3	3.3
M4.5 × 0.75		TY433266	14	70	25	6	4.9	8	3	3.7
M5 × 0.8		TY433286	15	70	25	6	4.9	8	3	4.2
M6 × 1.0		TY433316	17	80	30	6	4.9	8	3	5
M7 × 1.0		TY433346	17	80	30	7	5.5	8	3	6
M8 × 1.25		TY433366	20	90	35	8	6.2	9	3	6.8
M9 × 1.25		TY433396	20	90	35	9	7	10	3	7.8
M10 × 1.5		TY433426	22	100	39	10	8	11	3	8.5
M11 × 1.5		TY433466	22	100	40	8	6.2	9	3	9.5
M12 × 1.75		TY433506	24	110	44	9	7	10	3	10.2
M14 × 2.0		TY433546	26	110	44	11	9	12	3	12
M16 × 2.0		TY433606	27	110	44	12	9	12	3	14
M18 × 2.5		TY433656	30	125	50	14	11	14	4	15.5
M20 × 2.5		TY433706	32	140	54	16	12	15	4	17.5
M22 × 2.5		TY433746	32	140	54	18	14.5	17	4	19.5
M24 × 3.0		TY433786	34	160	60	18	14.5	17	4	21
M27 × 3.0		TY433866	36	160	60	20	16	19	4	24
M30 × 3.5		TY433946	40	180	70	22	18	21	4	26.5

► DIN 371 (M2~M10) and DIN 376 (M11~M30)  
 ► \* DIN profile not ISO

◎ : Excellent ○ : Good

ISO Material Description	P										M						K			
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel				Grey cast iron		Nodular cast iron	Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended																				

ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	55	60	42	42	55	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended						◎	○														



THREAD  
MILL

SYNCHRO  
TAP

PRIME  
TAP

COMBO  
TAP

YG TAP  
STEEL

YG TAP CHIP  
BREAKER

YG TAP  
INOX

YG TAP  
CAST IRON

YG TAP  
HARDENED  
STEEL

YG TAP  
Ti Ni

YG TAP  
ALU

YG TAP  
FORMING

YG TAP  
GENERAL

PIPE TAP

STI TAP

NUT TAP

TECHNICAL  
DATA

					TC163 TC963 TC169 TC170	TE953	TC622	TE943	TC433	TE443	TY433
ISO	VDI 3323	Material Description	HB	HRC	Vc (m/min.)						
P	1	Non-alloy steel	125		15-20		15-20				
	2		190	13	15-20		15-20				
	3		250	25	12-18	12-18	12-18	12-18			
N	21	Aluminum- wrought alloy	60		10-15	10-15	10-15	10-15			
	22		100		10-15	10-15	10-15	10-15			
	23	Aluminum- cast, alloyed	75		15-20	15-20	15-20	15-20			
	24		90		15-20	15-20	15-20	15-20			
	25		130			10-15		10-15			
	26	Copper and Copper Alloys (Bronze / Brass)	110						25-35	25-35	35-40
	27		90		8-12		8-12		8-12	8-12	12-16
	28		100						15-20		20-25