



Leading Through Innovation

SOLID CARBIDE

DREAM DRILLS -FLAT BOTTOM

DREAM DRILLS - FLACHBOHRER

- For Holes on Various Angled Surfaces
- Für Bohrungen auf verschiedenen abgewinkelten Oberflächen

SELECTION GUIDE



SERIES

DPP447

DH450

DRILLING DEPTH

2XD

5XD

LENGTH

SHORT

LONG

SIZE MIN

D3.0

D3.0

SIZE MAX

D20.0

D20.0

PAGE

A110

A112

SURFACE TREATMENT

X-Coating

TIAIN

SOLID CARBIDE DREAM DRILLS FLAT BOTTOM

For Holes on Various Angled Surfaces



Please visit globalyg1.com/mat for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : p.A114

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc		
P	1	Non-alloy steel	About 0.15% C Annealed	125		◎	◎
	2		About 0.45% C Annealed	190	13	◎	◎
	3		About 0.45% C Quenched & Tempered	250	25	◎	◎
	4		About 0.75% C Annealed	270	28	○	○
	5		About 0.75% C Quenched & Tempered	300	32	○	○
	6	Low alloy steel	Annealed	180	10	◎	◎
	7		Quenched & Tempered	275	29	○	○
	8		Quenched & Tempered	300	32	○	○
	9		Quenched & Tempered	350	38	○	○
	10		High alloyed steel, and tool steel	Annealed	200	15	
	11	Quenched & Tempered		325	35		
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15	○	○
	13		Martensitic Quenched & Tempered	240	23		
	14		Austenitic	180	10		
K	15	Grey cast iron	Pearlitic / ferritic	180	10	◎	◎
	16		Pearlitic (Martensitic)	260	26	○	○
	17	Nodular cast iron	Ferritic	160	3		
	18		Pearlitic	250	25		
	19		Ferritic	130			
20	Malleable cast iron	Pearlitic	230	21			
N	21	Aluminum-wrought alloy	Not Curable	60		○	○
	22		Curable Hardened	100		○	○
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75			
	24		≤ 12% Si, Curable Hardened	90			
	25		> 12% Si, Not Curable	130			
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110			
	27		CuZn, CuSnZn (Brass)	90			
	28		CuSn, lead-free copper and electrolytic copper	100			
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic				
	30		Rubber, Wood, etc.				
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15		
	32		Cured	280	30		
	33		Annealed	250	25		
	34		Cured	350	38		
	35		Cast	320	34		
	36	Titanium Alloys	Pure Titanium	400 Rm			
	37		Alpha + Beta Alloys Hardened	1050 Rm			
H	38	Hardened steel	Hardened	550	55		
	39		Hardened	630	60		
	40	Chilled Cast Iron	Cast	400	42		
	41	Hardened Cast Iron	Hardened	550	55		

YG DREAM DRILLS - FLAT BOTTOM

DPP447 SERIES

CARBIDE, DREAM DRILLS - FLAT BOTTOM


SHORT

- VHM, DREAM DRILLS - FLACHBOHRER**
- DREAM DRILLS - FOND PLAT, FORET CARBURE MONOBLOC**
- PUNTE IN MD DREAM DRILLS, TESTA PIANA**

KURZ
COURTE
CORTA

- ▶ For holes on various angled surfaces.
- ▶ 180 degree point angle enables drilling of flat, inclined and curved surfaces.
- ▶ Optimized flute shape for excellent chip evacuation.
- ▶ High strength cutting edge to improve tool life and versatility drilling.
- ▶ For through holes, minimized burrs at entrance and exit when drilling thin plate.

- ▶ Für Bohrungen auf verschiedenen abgewinkelten Flächen.
- ▶ Der 180-Grad-Spitzenwinkel ermöglicht das Bohren von flachen, geneigten und gekrümmten Oberflächen.
- ▶ Optimierte Nutenform für hervorragende Spanabfuhr.
- ▶ Hochfeste Schneide zur Verbesserung der Standzeit und Vielseitigkeit beim Bohren.
- ▶ Für Durchgangsbohrungen, minimierter Grat am Ein- und Austritt beim Bohren von dünnen Blechen.



2 x D

Plain Shank
 HYDRAULIC CHUCK
 SHRINK FIT HOLDER
 ER COLLET CHUCK
 Recommended ToolHolder

Unit : mm

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
X-Coating	D1	D2	L1	L2
DPP447030	3.0	6	16	50
DPP447031	3.1	6	16	50
DPP447032	3.2	6	16	50
DPP447033	3.3	6	16	50
DPP447034	3.4	6	18	50
DPP447035	3.5	6	18	50
DPP447036	3.6	6	18	50
DPP447037	3.7	6	18	50
DPP447038	3.8	6	18	50
DPP447039	3.9	6	18	50
DPP447040	4.0	6	18	50
DPP447041	4.1	6	20	60
DPP447042	4.2	6	20	60
DPP447043	4.3	6	20	60
DPP447044	4.4	6	20	60
DPP447045	4.5	6	22	60
DPP447046	4.6	6	22	60
DPP447047	4.7	6	22	60
DPP447048	4.8	6	22	60
DPP447049	4.9	6	22	60
DPP447050	5.0	6	22	60
DPP447051	5.1	6	24	60
DPP447052	5.2	6	24	60
DPP447053	5.3	6	24	60
DPP447054	5.4	6	24	60
DPP447055	5.5	6	24	60
DPP447056	5.6	6	24	60
DPP447057	5.7	6	26	60

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
X-Coating	D1	D2	L1	L2
DPP447058	5.8	6	26	60
DPP447059	5.9	6	26	60
DPP447060	6.0	6	26	60
DPP447061	6.1	8	28	70
DPP447062	6.2	8	28	70
DPP447063	6.3	8	28	70
DPP447064	6.4	8	30	70
DPP447065	6.5	8	30	70
DPP447066	6.6	8	30	70
DPP447067	6.7	8	30	70
DPP447068	6.8	8	30	70
DPP447069	6.9	8	30	70
DPP447070	7.0	8	30	70
DPP447071	7.1	8	34	70
DPP447072	7.2	8	34	70
DPP447073	7.3	8	34	70
DPP447074	7.4	8	34	70
DPP447075	7.5	8	34	70
DPP447076	7.6	8	34	70
DPP447077	7.7	8	34	70
DPP447078	7.8	8	34	70
DPP447079	7.9	8	34	70
DPP447080	8.0	8	34	70
DPP447081	8.1	10	38	80
DPP447082	8.2	10	38	80
DPP447083	8.3	10	38	80

▶ Other diameters and shank types are available upon request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	15	23	10	10	10	26	3	25	42	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	◎	○	○	○	○	○

ISO	N										S							H			
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	34	34	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○																			



DREAM DRILLS - FLAT BOTTOM

DH450 SERIES

CARBIDE, DREAM DRILLS - FLAT BOTTOM with COOLANT HOLES

LONG

● VHM, DREAM DRILLS - FLACHBOHRER

KURZ

● DREAM DRILLS - FOND PLAT, FORET CARBURE MONOBLOC


LONGUE

● PUNTE IN MD DREAM DRILLS, TESTA PIANA

LUNGA

- ▶ For holes on various angled surfaces.
- ▶ 180 degree point angle enables drilling of flat, inclined and curved surfaces.
- ▶ Optimized flute shape for excellent chip evacuation.
- ▶ High strength cutting edge to improve tool life and versatility drilling.
- ▶ For through holes, minimized burrs at entrance and exit when drilling thin plate.
- ▶ Pilot Drilling for 5XD

- ▶ Für Bohrungen auf verschiedenen abgewinkelten Flächen.
- ▶ Der 180-Grad-Spitzenwinkel ermöglicht das Bohren von flachen, geneigten und gekrümmten Oberflächen.
- ▶ Optimierte Nutenform für hervorragende Spanabfuhr.
- ▶ Hochfeste Schneide zur Verbesserung der Standzeit und Vielseitigkeit beim Bohren.
- ▶ Für Durchgangsbohrungen, minimierter Grat am Ein- und Austritt beim Bohren von dünnen Blechen.
- ▶ Pilotbohren 5XD

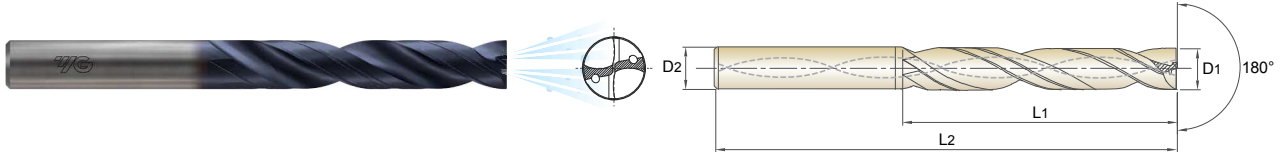

DIN 6537

CARBIDE

30°

h6

h7

180°

20 bar

TiAlN

p.A115

5 x D



- Plain Shank
- HYDRAULIC CHUCK
- SHRINK FIT HOLDER
- ER COLLET CHUCK

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length	
				L1	L2
TiAlN					
DH450030	3.0	6	28	66	
DH450031	3.1	6	28	66	
DH450032	3.2	6	28	66	
DH450033	3.3	6	28	66	
DH450034	3.4	6	28	66	
DH450035	3.5	6	28	66	
DH450036	3.6	6	28	66	
DH450037	3.7	6	28	66	
DH450038	3.8	6	36	74	
DH450039	3.9	6	36	74	
DH450040	4.0	6	36	74	
DH450041	4.1	6	36	74	
DH450042	4.2	6	36	74	
DH450043	4.3	6	36	74	
DH450044	4.4	6	36	74	
DH450045	4.5	6	36	74	
DH450046	4.6	6	36	74	
DH450047	4.7	6	36	74	
DH450048	4.8	6	44	82	
DH450049	4.9	6	44	82	
DH450050	5.0	6	44	82	
DH450051	5.1	6	44	82	
DH450052	5.2	6	44	82	
DH450053	5.3	6	44	82	
DH450054	5.4	6	44	82	
DH450055	5.5	6	44	82	
DH450056	5.6	6	44	82	
DH450057	5.7	6	44	82	

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length	
				L1	L2
TiAlN					
DH450058	5.8	6	44	82	
DH450059	5.9	6	44	82	
DH450060	6.0	6	44	82	
DH450061	6.1	8	53	91	
DH450062	6.2	8	53	91	
DH450063	6.3	8	53	91	
DH450064	6.4	8	53	91	
DH450065	6.5	8	53	91	
DH450066	6.6	8	53	91	
DH450067	6.7	8	53	91	
DH450068	6.8	8	53	91	
DH450069	6.9	8	53	91	
DH450070	7.0	8	53	91	
DH450071	7.1	8	53	91	
DH450072	7.2	8	53	91	
DH450073	7.3	8	53	91	
DH450074	7.4	8	53	91	
DH450075	7.5	8	53	91	
DH450076	7.6	8	53	91	
DH450077	7.7	8	53	91	
DH450078	7.8	8	53	91	
DH450079	7.9	8	53	91	
DH450080	8.0	8	53	91	
DH450081	8.1	10	61	103	
DH450082	8.2	10	61	103	
DH450083	8.3	10	61	103	

▶ Other diameters and shank types are available upon request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel				Grey cast iron		Nodular cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	29	32	38	15	35	15	23	10	10	26	3	25			
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○		○				◎	○				


ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○																			

DPP447 SERIES

without COOLANT HOLES (2XD)

Vc = m/min.
RPM = rev./min.
FEED = mm/rev.


ISO	VDI 3323	Material Description	Vc	Parameter	Drill Diameter (mm)								
					3.0	4.0	5.0	6.0	8.0	10.0	12.0	16.0	20.0
P	1	Non-alloy steel	80	RPM	8490	6370	5090	4240	3180	2550	2120	1590	1270
				FEED	0.02-0.05	0.03-0.07	0.03-0.08	0.04-0.10	0.08-0.14	0.11-0.17	0.11-0.21	0.18-0.28	0.28-0.38
			2	RPM	8490	6370	5090	4240	3180	2550	2120	1590	1270
	FEED			0.02-0.05	0.03-0.07	0.03-0.08	0.04-0.10	0.08-0.14	0.11-0.17	0.11-0.21	0.18-0.28	0.28-0.38	
	3		RPM	7430	5570	4460	3710	2790	2230	1860	1390	1110	
			FEED	0.02-0.05	0.03-0.07	0.03-0.08	0.04-0.10	0.07-0.13	0.11-0.17	0.11-0.21	0.18-0.28	0.24-0.34	
	4		RPM	4240	3180	2550	2120	1590	1270	1060	800	640	
			FEED	0.02-0.05	0.03-0.07	0.03-0.08	0.04-0.10	0.07-0.13	0.11-0.17	0.11-0.21	0.18-0.28	0.24-0.34	
	5		RPM	4030	3020	2420	2020	1510	1210	1010	760	600	
FEED		0.02-0.05	0.02-0.06	0.03-0.08	0.03-0.09	0.06-0.12	0.09-0.15	0.08-0.18	0.14-0.24	0.21-0.31			
6	Low alloy steel	RPM	4770	3580	2860	2390	1790	1430	1190	900	720		
		FEED	0.02-0.05	0.03-0.07	0.03-0.08	0.04-0.10	0.07-0.13	0.11-0.17	0.11-0.21	0.18-0.28	0.24-0.34		
		RPM	4240	3180	2550	2120	1590	1270	1060	800	640		
7	Low alloy steel	RPM	4030	3020	2420	2020	1510	1210	1010	760	600		
		FEED	0.02-0.05	0.02-0.06	0.03-0.08	0.03-0.09	0.06-0.12	0.09-0.15	0.08-0.18	0.14-0.24	0.21-0.31		
8	Low alloy steel	RPM	2650	1990	1590	1330	990	800	660	500	400		
		FEED	0.01-0.03	0.02-0.04	0.02-0.05	0.03-0.06	0.03-0.08	0.05-0.10	0.06-0.12	0.06-0.16	0.10-0.20		
9	Low alloy steel	RPM	3180	2390	1910	1590	1190	950	800	600	480		
		FEED	0.01-0.03	0.01-0.03	0.02-0.04	0.02-0.05	0.03-0.06	0.03-0.08	0.05-0.10	0.06-0.12	0.09-0.15		
M	12	Stainless steel	70	RPM	7430	5570	4460	3710	2790	2230	1860	1390	1110
K	15	Grey cast iron	70	FEED	0.02-0.05	0.02-0.06	0.03-0.08	0.03-0.09	0.06-0.12	0.09-0.15	0.08-0.18	0.14-0.24	0.20-0.30
				RPM	6370	4770	3820	3180	2390	1910	1590	1190	950
K	16	Grey cast iron	60	FEED	0.02-0.05	0.02-0.05	0.03-0.06	0.03-0.07	0.04-0.10	0.07-0.13	0.06-0.16	0.11-0.21	0.15-0.25
				RPM	17510	13130	10500	8750	6570	5250	4380	3280	2630
N	21	Aluminum-wrought alloy	165	FEED	0.02-0.05	0.04-0.08	0.04-0.10	0.06-0.12	0.10-0.16	0.14-0.20	0.14-0.24	0.22-0.32	0.30-0.40
				RPM	17510	13130	10500	8750	6570	5250	4380	3280	2630
N	22	Aluminum-wrought alloy	165	FEED	0.02-0.05	0.04-0.08	0.04-0.10	0.06-0.12	0.10-0.16	0.14-0.20	0.14-0.24	0.22-0.32	0.30-0.40
				RPM	17510	13130	10500	8750	6570	5250	4380	3280	2630

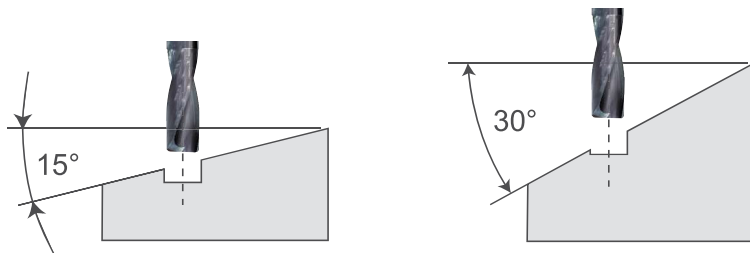

Surface Angle	Cutting Conditions	
	RPM	FEED
0° - 15°	100%	100%
15° - 30°	100%	50%
30° -	70%	30%


- ▶ The cutting conditions are for 2xD.
- ▶ The rigid and precise machine and holder are required.
- ▶ The recommended depth of hole is measured from the highest point of the hole on drilling in inclined and angled surfaces.
- ▶ The recommended cutting conditions are those for drilling on flat and horizontal surfaces.
- ▶ Please adjust feed rate according to the above surface angle when drilling on an inclined surface.
 - The recommended feed rate 50% or lower, in case of 15°-30° of the incline angle.
 - The recommended feed rate 30% or lower and RPM 70%, in case of 30° - of the incline angle.
- ▶ Please decrease cutting speed as material hardness increases.
- ▶ Only use drilling tool. Side milling, traversing, helical milling are not usable.

VARIETY OF DRILLING

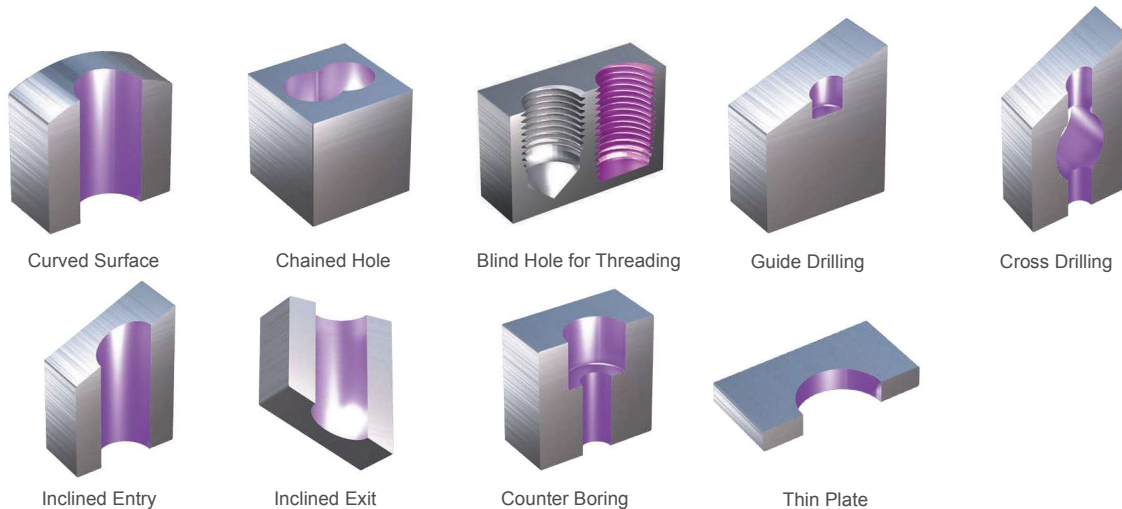



Global Cutting Tool Leader **YG-1**

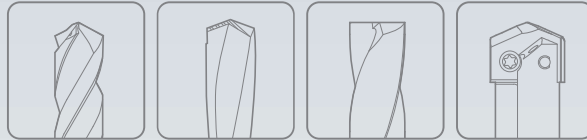

HOLEMAKING