



Leading Through Innovation



**SOLID CARBIDE**

# **DREAM DRILLS -GENERAL**

**DREAM DRILLS - UNIVERSAL**

- For General Purpose (HRc30 to HRc50)
- Für allgemeine Anwendungen (HRc30 bis HRc50)

SELECTION GUIDE



SERIES

DH404

DH423  
DH443

DRILLING DEPTH

3XD

3XD

LENGTH

STUB

SHORT

SIZE MIN

D3.0

D3.0

SIZE MAX

D20.0

D20.0

PAGE

A80

A82

SURFACE TREATMENT

TiAIN

# SOLID CARBIDE DREAM DRILLS GENERAL

For General Purpose (HRc30 to HRc50)



Please visit  
[globalyg1.com/mat](http://globalyg1.com/mat)  
for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : p.A96

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc		
P	1	Non-alloy steel	About 0.15% C Annealed	125			
	2		About 0.45% C Annealed	190	13	◎	◎
	3		About 0.45% C Quenched & Tempered	250	25	◎	◎
	4		About 0.75% C Annealed	270	28	◎	◎
	5		About 0.75% C Quenched & Tempered	300	32	○	○
	6	Low alloy steel	Annealed	180	10	◎	◎
	7		Quenched & Tempered	275	29	◎	◎
	8		Quenched & Tempered	300	32	○	○
	9		Quenched & Tempered	350	38	○	○
	10		High alloyed steel, and tool steel	Annealed	200	15	◎
	11	Quenched & Tempered		325	35	○	○
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15	○	○
	13		Martensitic Quenched & Tempered	240	23	○	○
	14		Austenitic	180	10		
K	15	Grey cast iron	Pearlitic / ferritic	180	10	◎	◎
	16		Pearlitic (Martensitic)	260	26	○	○
	17	Nodular cast iron	Ferritic	160	3	◎	◎
	18		Pearlitic	250	25	○	○
	19		Ferritic	130		◎	◎
20	Malleable cast iron	Pearlitic	230	21	○	○	
N	21	Aluminum-wrought alloy	Not Curable	60			
	22		Curable Hardened	100			
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75			
	24		≤ 12% Si, Curable Hardened	90			
	25		> 12% Si, Not Curable	130			
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110			
	27		CuZn, CuSnZn (Brass)	90			
	28		CuSn, lead-free copper and electrolytic copper	100			
	29		Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic			
	30		Rubber, Wood, etc.				
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15		
	32		Cured	280	30		
	33		Annealed	250	25		
	34		Cured	350	38		
	35		Cast	320	34		
	36	Titanium Alloys	Pure Titanium	400 Rm			
	37		Alpha + Beta Alloys Hardened	1050 Rm			
H	38	Hardened steel	Hardened	550	55	○	○
	39		Hardened	630	60		
	40	Chilled Cast Iron	Cast	400	42		
	41	Hardened Cast Iron	Hardened	550	55		



**CARBIDE, DREAM DRILLS**

**STUB**


**VOLLHARTMETALL DREAM SPIRALBOHRER**

**Forets DREAM DRILLS carbure, série extra-courte**  
**PUNTE ELICOIDALI IN MD - DREAM DRILLS**

**EXTRA KURZ**  
**EXTRA-COURTE**  
**EXTRA CORTA**

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation

- ▶ Bohren von Stahl, Stahlguss, Gusseisen, Temperguss, Nichteisenmetallen-Leichtmetallen, abrasiven Kunststoffen
- ▶ Selbst zentrierend und guter Spanbruch durch die R-Ausspitzung
- ▶ Wellenform und Neagtivfase auf der Schneide bewirken geringen Schub, stabiles Drehmoment und lange Standzeit
- ▶ Optimierte Nutenform für Hochleistungsbohren und leichte Spanabfuhr



**DIN 6539** **CARBIDE** **30°** **h6** **h7** **140°** **TiAIN** **p.A96**

**D1=D2**  
**3 x D**

	Plain Shank	Flat Shank
	SHRINK FIT HOLDER	HYDRAULIC CHUCK
	HYDRAULIC CHUCK	SHRINK FIT HOLDER
	ER COLLET CHUCK	END MILL HOLDER

EDP No.	Drill Diameter	Flute Length	Overall Length
DH404030	3.0	16	46
DH404031	3.1	18	49
DH404032	3.2	18	49
DH404033	3.3	18	49
DH404034	3.4	20	52
DH404035	3.5	20	52
DH404036	3.6	20	52
DH404037	3.7	20	52
DH404038	3.8	22	55
DH404039	3.9	22	55
DH404040	4.0	22	55
DH404041	4.1	22	55
DH404042	4.2	22	55
DH404043	4.3	24	58
DH404044	4.4	24	58
DH404045	4.5	24	58
DH404046	4.6	24	58
DH404047	4.7	24	58
DH404048	4.8	26	62
DH404049	4.9	26	62
DH404050	5.0	26	62
DH404051	5.1	26	62
DH404052	5.2	26	62
DH404053	5.3	26	62

EDP No.	Drill Diameter	Flute Length	Overall Length
DH404054	5.4	28	66
DH404055	5.5	28	66
DH404056	5.6	28	66
DH404057	5.7	28	66
DH404058	5.8	28	66
DH404059	5.9	28	66
DH404060	6.0	28	66
DH404061	6.1	31	70
DH404062	6.2	31	70
DH404063	6.3	31	70
DH404064	6.4	31	70
DH404065	6.5	31	70
DH404066	6.6	31	70
DH404067	6.7	31	70
DH404068	6.8	34	74
DH404069	6.9	34	74
DH404070	7.0	34	74
DH404071	7.1	34	74
DH404072	7.2	34	74
DH404073	7.3	34	74
DH404074	7.4	34	74
DH404075	7.5	34	74
DH404076	7.6	37	79
DH404077	7.7	37	79

▶ Other shank types are available on your request.

▶ NEXT PAGE

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙

⊙ : Excellent ○ : Good



PLAIN SHANK

**DH423** SERIES

FLAT SHANK

**DH443** SERIES

**CARBIDE, DREAM DRILLS**


**SHORT**

- VOLLHARTMETALL DREAM SPIRALBOHRER**
- Forets DREAM DRILLS carbure, série courte**
- PUNTE ELICOIDALI IN MD - DREAM DRILLS**

**KURZ  
COURTE  
CORTA**

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation

- ▶ Bohren von Stahl, Stahlguss, Gusseisen, Temperguss, Nichteisenmetallen-Leichtmetallen, abrasiven Kunststoffen
- ▶ Selbst zentrierend und guter Spanbruch durch die R-Ausspitzung
- ▶ Wellenform und Neagtivfase auf der Schneide bewirken geringen Schub, stabiles Drehmoment und lange Standzeit
- ▶ Optimierte Nutenform für Hochleistungsbohren und leichte Spanabfuhr

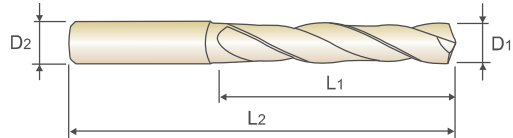

**DIN 6537** **CARBIDE** **30°** **h6** **m7** **140°** **TiAIN** **p.A96**

**3 x D**

	Plain Shank	SHRINK FIT HOLDER	Flat Shank	HYDRAULIC CHUCK
		HYDRAULIC CHUCK		SHRINK FIT HOLDER
		ER COLLET CHUCK		END MILL HOLDER

Unit : mm

EDP No. (TiAIN)		Drill Diameter	Shank Diameter	Flute Length	Overall Length
Plain	Flat	D1	D2	L1	L2
DH423030	DH443030	3.0	6	20	62
DH423031	DH443031	3.1	6	20	62
DH423032	DH443032	3.2	6	20	62
DH423033	DH443033	3.3	6	20	62
DH423034	DH443034	3.4	6	20	62
DH423035	DH443035	3.5	6	20	62
DH423036	DH443036	3.6	6	20	62
DH423037	DH443037	3.7	6	20	62
DH423038	DH443038	3.8	6	24	66
DH423039	DH443039	3.9	6	24	66
DH423040	DH443040	4.0	6	24	66
DH423041	DH443041	4.1	6	24	66
DH423042	DH443042	4.2	6	24	66
DH423043	DH443043	4.3	6	24	66
DH423044	DH443044	4.4	6	24	66
DH423045	DH443045	4.5	6	24	66
DH423046	DH443046	4.6	6	24	66
DH423047	DH443047	4.7	6	24	66
DH423048	DH443048	4.8	6	28	66
DH423049	DH443049	4.9	6	28	66
DH423050	DH443050	5.0	6	28	66
DH423051	DH443051	5.1	6	28	66
DH423052	DH443052	5.2	6	28	66
DH423053	DH443053	5.3	6	28	66

EDP No. (TiAIN)		Drill Diameter	Shank Diameter	Flute Length	Overall Length
Plain	Flat	D1	D2	L1	L2
DH423054	DH443054	5.4	6	28	66
DH423055	DH443055	5.5	6	28	66
DH423056	DH443056	5.6	6	28	66
DH423057	DH443057	5.7	6	28	66
DH423058	DH443058	5.8	6	28	66
DH423059	DH443059	5.9	6	28	66
DH423060	DH443060	6.0	6	28	66
DH423061	DH443061	6.1	8	34	79
DH423062	DH443062	6.2	8	34	79
DH423063	DH443063	6.3	8	34	79
DH423064	DH443064	6.4	8	34	79
DH423065	DH443065	6.5	8	34	79
DH423066	DH443066	6.6	8	34	79
DH423067	DH443067	6.7	8	34	79
DH423068	DH443068	6.8	8	34	79
DH423069	DH443069	6.9	8	34	79
DH423070	DH443070	7.0	8	34	79
DH423071	DH443071	7.1	8	41	79
DH423072	DH443072	7.2	8	41	79
DH423073	DH443073	7.3	8	41	79
DH423074	DH443074	7.4	8	41	79
DH423075	DH443075	7.5	8	41	79
DH423076	DH443076	7.6	8	41	79
DH423077	DH443077	7.7	8	41	79

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended																		◎			



PLAIN SHANK

**DH423** SERIES

FLAT SHANK

**DH443** SERIES

**CARBIDE, DREAM DRILLS**


**SHORT**

- VOLLHARTMETALL DREAM SPIRALBOHRER**
- Forets DREAM DRILLS carbure, série courte**
- PUNTE ELICOIDALI IN MD - DREAM DRILLS**

**KURZ  
COURTE  
CORTA**

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation

- ▶ Bohren von Stahl, Stahlguss, Gusseisen, Temperguss, Nichtisenmetallen-Leichtmetallen, abrasiven Kunststoffen
- ▶ Selbst zentrierend und guter Spanbruch durch die R-Ausspitzung
- ▶ Wellenform und Neagtivfase auf der Schneide bewirken geringen Schub, stabiles Drehmoment und lange Standzeit
- ▶ Optimierte Nutenform für Hochleistungsbohren und leichte Spanabfuhr

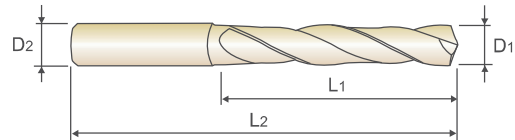

DIN 6537
CARBIDE
30°
h6
m7
140°
TiAIN
p.A96

3 x D



	Plain Shank	Flat Shank
	SHRINK FIT HOLDER	HYDRAULIC CHUCK
	HYDRAULIC CHUCK	SHRINK FIT HOLDER
	ER COLLET CHUCK	END MILL HOLDER

Unit : mm

EDP No. (TiAIN)		Drill Diameter	Shank Diameter	Flute Length	Overall Length
Plain	Flat	D1	D2	L1	L2
DH423138	DH443138	13.8	14	60	107
DH423140	DH443140	14.0	14	60	107
DH423145	DH443145	14.5	16	65	115
DH423148	DH443148	14.8	16	65	115
DH423150	DH443150	15.0	16	65	115
DH423155	DH443155	15.5	16	65	115
DH423158	DH443158	15.8	16	65	115
DH423160	DH443160	16.0	16	65	115
DH423165	DH443165	16.5	18	73	123
DH423168	DH443168	16.8	18	73	123

EDP No. (TiAIN)		Drill Diameter	Shank Diameter	Flute Length	Overall Length
Plain	Flat	D1	D2	L1	L2
DH423170	DH443170	17.0	18	73	123
DH423175	DH443175	17.5	18	73	123
DH423178	DH443178	17.8	18	73	123
DH423180	DH443180	18.0	18	73	123
DH423185	DH443185	18.5	20	79	131
DH423190	DH443190	19.0	20	79	131
DH423195	DH443195	19.5	20	79	131
DH423198	DH443198	19.8	20	79	131
DH423200	DH443200	20.0	20	79	131

▶ Other shank types are available on your request.

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S							H			
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended																		◎			



**CARBIDE, DREAM DRILLS**


LONG

- VOLLHARTMETALL DREAM SPIRALBOHRER
- Forets DREAM DRILLS carbure, série longue
- PUNTE ELICOIDALI IN MD - DREAM DRILLS

LANG  
LONGUE  
LUNGA

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation

- ▶ Bohren von Stahl, Stahlguss, Gusseisen, Temperguss, Nichteisenmetallen-Leichtmetallen, abrasiven Kunststoffen
- ▶ Selbst zentrierend und guter Spanbruch durch die R-Ausspitzung
- ▶ Wellenform und Neaktivfäse auf der Schneide bewirken geringen Schub, stabiles Drehmoment und lange Standzeit
- ▶ Optimierte Nutenform für Hochleistungsbohren und leichte Spanabfuhr

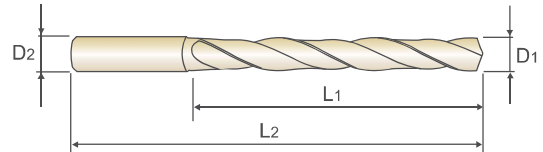

DIN 6537

CARBIDE

30°

h6

m7

140°

TiAIN



p.A96

5 x D



	Plain Shank	Flat Shank
◎	SHRINK FIT HOLDER	HYDRAULIC CHUCK
○	HYDRAULIC CHUCK	SHRINK FIT HOLDER
○	ER COLLET CHUCK	END MILL HOLDER

Unit : mm

EDP No. (TiAIN)		Drill Diameter	Shank Diameter	Flute Length	Overall Length
Plain	Flat	D1	D2	L1	L2
DH424058	DH444058	5.8	6	44	82
DH424059	DH444059	5.9	6	44	82
DH424060	DH444060	6.0	6	44	82
DH424061	DH444061	6.1	8	53	91
DH424062	DH444062	6.2	8	53	91
DH424063	DH444063	6.3	8	53	91
DH424064	DH444064	6.4	8	53	91
DH424065	DH444065	6.5	8	53	91
DH424066	DH444066	6.6	8	53	91
DH424067	DH444067	6.7	8	53	91
DH424068	DH444068	6.8	8	53	91
DH424069	DH444069	6.9	8	53	91
DH424070	DH444070	7.0	8	53	91
DH424071	DH444071	7.1	8	53	91
DH424072	DH444072	7.2	8	53	91
DH424073	DH444073	7.3	8	53	91
DH424074	DH444074	7.4	8	53	91
DH424075	DH444075	7.5	8	53	91
DH424076	DH444076	7.6	8	53	91
DH424077	DH444077	7.7	8	53	91
DH424078	DH444078	7.8	8	53	91
DH424079	DH444079	7.9	8	53	91
DH424080	DH444080	8.0	8	53	91
DH424081	DH444081	8.1	10	61	103

EDP No. (TiAIN)		Drill Diameter	Shank Diameter	Flute Length	Overall Length
Plain	Flat	D1	D2	L1	L2
DH424082	DH444082	8.2	10	61	103
DH424083	DH444083	8.3	10	61	103
DH424084	DH444084	8.4	10	61	103
DH424085	DH444085	8.5	10	61	103
DH424086	DH444086	8.6	10	61	103
DH424087	DH444087	8.7	10	61	103
DH424088	DH444088	8.8	10	61	103
DH424089	DH444089	8.9	10	61	103
DH424090	DH444090	9.0	10	61	103
DH424091	DH444091	9.1	10	61	103
DH424092	DH444092	9.2	10	61	103
DH424093	DH444093	9.3	10	61	103
DH424094	DH444094	9.4	10	61	103
DH424095	DH444095	9.5	10	61	103
DH424096	DH444096	9.6	10	61	103
DH424097	DH444097	9.7	10	61	103
DH424098	DH444098	9.8	10	61	103
DH424099	DH444099	9.9	10	61	103
DH424100	DH444100	10.0	10	61	103
DH424101	DH444101	10.1	12	71	118
DH424102	DH444102	10.2	12	71	118
DH424103	DH444103	10.3	12	71	118
DH424104	DH444104	10.4	12	71	118
DH424105	DH444105	10.5	12	71	118

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K									
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
HRc	13	25	28	32	36	10	29	32	38	42	15	35	15	23	10	10	26	3	25					
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230				
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S							H						
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys							Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41			
HRc											15	30	25	38	34									
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550			
Recommended																					◎	◎	◎	



**CARBIDE, DREAM DRILLS with COOLANT HOLES**

**SHORT**

**VOLLHARTMETALL DREAM SPIRALBOHRER mit KÜHLKANAL**

**KURZ**

**Forets DREAM DRILLS carbure, avec arrosage central, série courte**


**COURTE**

**PUNTE ELICOIDALI IN MD - DREAM DRILLS (con fori di refrigerazione)**

**CORTA**

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation

- ▶ Bohren von Stahl, Stahlguss, Gusseisen, Temperguss, Nichteisenmetallen-Leichtmetallen, abrasiven Kunststoffen
- ▶ Selbst zentrierend und guter Spanbruch durch die R-Ausspitzung
- ▶ Wellenform und Neagtivfase auf der Schneide bewirken geringen Schub, stabiles Drehmoment und lange Standzeit
- ▶ Optimierte Nutenform für Hochleistungsbohren und leichte Spanabfuhr

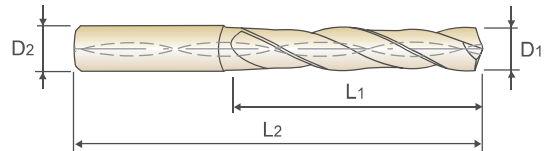

DIN 6537

CARBIDE

30°

h6

m7

140°

20 bar

TiAlN

p.A97

3 x D

Recommended ToolHolder



	Plain Shank	Flat Shank
◎	SHRINK FIT HOLDER	HYDRAULIC CHUCK
○	HYDRAULIC CHUCK	SHRINK FIT HOLDER
○	ER COLLET CHUCK	END MILL HOLDER

EDP No. (TiAlN)		Drill Diameter	Shank Diameter	Flute Length	Overall Length
Plain	Flat	D1	D2	L1	L2
DH406030	DH446030	3.0	6	20	62
DH406031	DH446031	3.1	6	20	62
DH406032	DH446032	3.2	6	20	62
DH406033	DH446033	3.3	6	20	62
DH406034	DH446034	3.4	6	20	62
DH406035	DH446035	3.5	6	20	62
DH406036	DH446036	3.6	6	20	62
DH406037	DH446037	3.7	6	20	62
DH406038	DH446038	3.8	6	24	66
DH406039	DH446039	3.9	6	24	66
DH406040	DH446040	4.0	6	24	66
DH406041	DH446041	4.1	6	24	66
DH406042	DH446042	4.2	6	24	66
DH406043	DH446043	4.3	6	24	66
DH406044	DH446044	4.4	6	24	66
DH406045	DH446045	4.5	6	24	66
DH406046	DH446046	4.6	6	24	66
DH406047	DH446047	4.7	6	24	66
DH406048	DH446048	4.8	6	28	66
DH406049	DH446049	4.9	6	28	66
DH406050	DH446050	5.0	6	28	66
DH406051	DH446051	5.1	6	28	66
DH406052	DH446052	5.2	6	28	66
DH406053	DH446053	5.3	6	28	66

EDP No. (TiAlN)		Drill Diameter	Shank Diameter	Flute Length	Overall Length
Plain	Flat	D1	D2	L1	L2
DH406054	DH446054	5.4	6	28	66
DH406055	DH446055	5.5	6	28	66
DH406056	DH446056	5.6	6	28	66
DH406057	DH446057	5.7	6	28	66
DH406058	DH446058	5.8	6	28	66
DH406059	DH446059	5.9	6	28	66
DH406060	DH446060	6.0	6	28	66
DH406061	DH446061	6.1	8	34	79
DH406062	DH446062	6.2	8	34	79
DH406063	DH446063	6.3	8	34	79
DH406064	DH446064	6.4	8	34	79
DH406065	DH446065	6.5	8	34	79
DH406066	DH446066	6.6	8	34	79
DH406067	DH446067	6.7	8	34	79
DH406068	DH446068	6.8	8	34	79
DH406069	DH446069	6.9	8	34	79
DH406070	DH446070	7.0	8	34	79
DH406071	DH446071	7.1	8	41	79
DH406072	DH446072	7.2	8	41	79
DH406073	DH446073	7.3	8	41	79
DH406074	DH446074	7.4	8	41	79
DH406075	DH446075	7.5	8	41	79
DH406076	DH446076	7.6	8	41	79
DH406077	DH446077	7.7	8	41	79

Unit : mm

▶ Other shank types are available on your request.

▶ NEXT PAGE

ISO	P										M				K									
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
HRC	13	25	28	32	36	10	29	32	38	42	15	35	15	23	10	10	26	3	25					
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230				
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎		

ISO	N					S										H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended																		◎			

◎ : Excellent ○ : Good

**CARBIDE, DREAM DRILLS with COOLANT HOLES**


**SHORT**

- VOLLHARTMETALL DREAM SPIRALBOHRER mit KÜHLKANAL**
- Forets DREAM DRILLS carbure, avec arrosage central, série courte**
- PUNTE ELICOIDALI IN MD - DREAM DRILLS (con fori di refrigerazione)**

**KURZ  
COURTE  
CORTA**

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation

- ▶ Bohren von Stahl, Stahlguss, Gusseisen, Temperguss, Nichtisenmetallen-Leichtmetallen, abrasiven Kunststoffen
- ▶ Selbst zentrierend und guter Spanbruch durch die R-Ausspitzung
- ▶ Wellenform und Neaktivfäse auf der Schneide bewirken geringen Schub, stabiles Drehmoment und lange Standzeit
- ▶ Optimierte Nutenform für Hochleistungsbohren und leichte Spanabfuhr

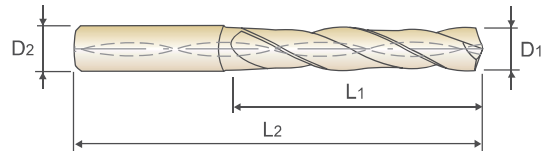

**DIN 6537**

**CARBIDE**

**30°**

**h6**

**m7**

**140°**

**20 bar**

**TiAIN**

**p.A97**

**3 x D**



	Plain Shank	Flat Shank
	SHRINK FIT HOLDER	HYDRAULIC CHUCK
	HYDRAULIC CHUCK	SHRINK FIT HOLDER
	ER COLLET CHUCK	END MILL HOLDER

EDP No. (TiAIN)	Drill Diameter	Shank Diameter	Flute Length		Overall Length	
			D1	D2	L1	L2
Plain	Flat	D1	D2	L1	L2	
DH406150	DH446150	15.0	16	65	115	
DH406155	DH446155	15.5	16	65	115	
DH406160	DH446160	16.0	16	65	115	
DH406165	DH446165	16.5	18	73	123	
DH406170	DH446170	17.0	18	73	123	
DH406175	DH446175	17.5	18	73	123	

Unit : mm

EDP No. (TiAIN)	Drill Diameter	Shank Diameter	Flute Length		Overall Length	
			D1	D2	L1	L2
Plain	Flat	D1	D2	L1	L2	
DH406180	DH446180	18.0	18	73	123	
DH406185	DH446185	18.5	20	79	131	
DH406190	DH446190	19.0	20	79	131	
DH406195	DH446195	19.5	20	79	131	
DH406200	DH446200	20.0	20	79	131	

▶ Other shank types are available on your request.

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	3	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S							H			
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended																		◎			





**CARBIDE, DREAM DRILLS with COOLANT HOLES**

LONG

● VOLLHARTMETALL DREAM SPIRALBOHRER mit KÜHLKANAL

LANG

● Forets DREAM DRILLS carbure, avec arrosage central, série longue

LONGUE

● PUNTE ELICOIDALI IN MD - DREAM DRILLS (con fori di refrigerazione)

LUNGA

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation

- ▶ Bohren von Stahl, Stahlguss, Gusseisen, Temperguss, Nichtisenmetallen-Leichtmetallen, abrasiven Kunststoffen
- ▶ Selbst zentrierend und guter Spanbruch durch die R-Ausspitzung
- ▶ Wellenform und Neaktivfäse auf der Schneide bewirken geringen Schub, stabiles Drehmoment und lange Standzeit
- ▶ Optimierte Nutenform für Hochleistungsbohren und leichte Spanabfuhr



DIN 6537

CARBIDE

30°

h6

m7

140°

20 bar

TiAlN

p.A97

5 x D



	Plain Shank	Flat Shank
◎ SHRINK FIT HOLDER	HYDRAULIC CHUCK	
◎ HYDRAULIC CHUCK	SHRINK FIT HOLDER	
○ ER COLLET CHUCK	END MILL HOLDER	

EDP No. (TiAlN)		Drill Diameter	Shank Diameter	Flute Length	Overall Length
Plain	Flat	D1	D2	L1	L2
DH408058	DH448058	5.8	6	44	82
DH408059	DH448059	5.9	6	44	82
DH408060	DH448060	6.0	6	44	82
DH408061	DH448061	6.1	8	53	91
DH408062	DH448062	6.2	8	53	91
DH408063	DH448063	6.3	8	53	91
DH408064	DH448064	6.4	8	53	91
DH408065	DH448065	6.5	8	53	91
DH408066	DH448066	6.6	8	53	91
DH408067	DH448067	6.7	8	53	91
DH408068	DH448068	6.8	8	53	91
DH408069	DH448069	6.9	8	53	91
DH408070	DH448070	7.0	8	53	91
DH408071	DH448071	7.1	8	53	91
DH408072	DH448072	7.2	8	53	91
DH408073	DH448073	7.3	8	53	91
DH408074	DH448074	7.4	8	53	91
DH408075	DH448075	7.5	8	53	91
DH408076	DH448076	7.6	8	53	91
DH408077	DH448077	7.7	8	53	91
DH408078	DH448078	7.8	8	53	91
DH408079	DH448079	7.9	8	53	91
DH408080	DH448080	8.0	8	53	91
DH408081	DH448081	8.1	10	61	103

Unit : mm

EDP No. (TiAlN)		Drill Diameter	Shank Diameter	Flute Length	Overall Length
Plain	Flat	D1	D2	L1	L2
DH408082	DH448082	8.2	10	61	103
DH408083	DH448083	8.3	10	61	103
DH408084	DH448084	8.4	10	61	103
DH408085	DH448085	8.5	10	61	103
DH408086	DH448086	8.6	10	61	103
DH408087	DH448087	8.7	10	61	103
DH408088	DH448088	8.8	10	61	103
DH408089	DH448089	8.9	10	61	103
DH408090	DH448090	9.0	10	61	103
DH408091	DH448091	9.1	10	61	103
DH408092	DH448092	9.2	10	61	103
DH408093	DH448093	9.3	10	61	103
DH408094	DH448094	9.4	10	61	103
DH408095	DH448095	9.5	10	61	103
DH408096	DH448096	9.6	10	61	103
DH408097	DH448097	9.7	10	61	103
DH408098	DH448098	9.8	10	61	103
DH408099	DH448099	9.9	10	61	103
DH408100	DH448100	10.0	10	61	103
DH408101	DH448101	10.1	12	71	118
DH408102	DH448102	10.2	12	71	118
DH408103	DH448103	10.3	12	71	118
DH408104	DH448104	10.4	12	71	118
DH408105	DH448105	10.5	12	71	118

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M					K				
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	36	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S							H			
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended																		◎			



**CARBIDE, DREAM DRILLS with COOLANT HOLES**

**EXTRA LONG**

**VOLLHARTMETALL DREAM SPIRALBOHRER mit KÜHLKANAL**

**ÜBERLANG**

**Forets DREAM DRILLS carbure, avec arrosage central, série extra-longue**


**EXTRA-LONGUE**

**PUNTE ELICOIDALI IN MD - DREAM DRILLS (con fori di refrigerazione)**

**EXTRA LUNGA**

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation

- ▶ Bohren von Stahl, Stahlguss, Gusseisen, Temperguss, Nichtisenmetallen-Leichtmetallen, abrasiven Kunststoffen
- ▶ Selbst zentrierend und guter Spanbruch durch die R-Ausspitzung
- ▶ Wellenform und Neaktivfäse auf der Schneide bewirken geringen Schub, stabiles Drehmoment und lange Standzeit
- ▶ Optimierte Nutenform für Hochleistungsbohren und leichte Spanabfuhr

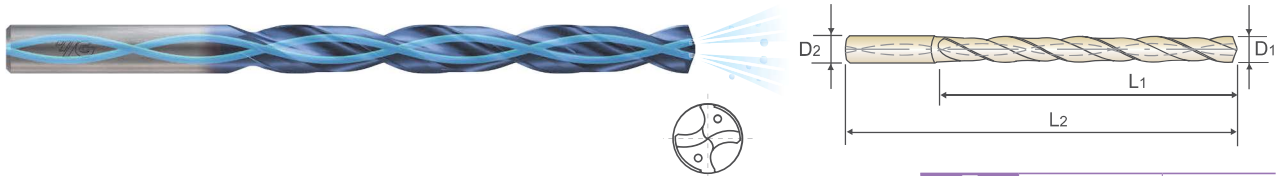

**DIN 6537**

**CARBIDE**

**30°**

**h6**

**m7**

**140°**

**20 bar**

**TiAlN**

**p.A97**

**8 x D**

**Recommended ToolHolder**



Plain Shank	Flat Shank
SHRINK FIT HOLDER	HYDRAULIC CHUCK
HYDRAULIC CHUCK	SHRINK FIT HOLDER
ER COLLET CHUCK	END MILL HOLDER

Unit : mm

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAlN	D1	D2	L1	L2
DH421030	3.0	6	34	72
DH421031	3.1	6	34	72
DH421032	3.2	6	34	72
DH421033	3.3	6	34	72
DH421034	3.4	6	34	72
DH421035	3.5	6	34	72
DH421036	3.6	6	34	72
DH421037	3.7	6	34	72
DH421038	3.8	6	43	81
DH421039	3.9	6	43	81
DH421040	4.0	6	43	81
DH421041	4.1	6	43	81
DH421042	4.2	6	43	81
DH421043	4.3	6	43	81
DH421044	4.4	6	43	81
DH421045	4.5	6	43	81
DH421046	4.6	6	43	81
DH421047	4.7	6	43	81
DH421048	4.8	6	57	95
DH421049	4.9	6	57	95
DH421050	5.0	6	57	95
DH421051	5.1	6	57	95
DH421052	5.2	6	57	95
DH421053	5.3	6	57	95

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAlN	D1	D2	L1	L2
DH421054	5.4	6	57	95
DH421055	5.5	6	57	95
DH421056	5.6	6	57	95
DH421057	5.7	6	57	95
DH421058	5.8	6	57	95
DH421059	5.9	6	57	95
DH421060	6.0	6	57	95
DH421061	6.1	8	76	114
DH421062	6.2	8	76	114
DH421063	6.3	8	76	114
DH421064	6.4	8	76	114
DH421065	6.5	8	76	114
DH421066	6.6	8	76	114
DH421067	6.7	8	76	114
DH421068	6.8	8	76	114
DH421069	6.9	8	76	114
DH421070	7.0	8	76	114
DH421071	7.1	8	76	114
DH421072	7.2	8	76	114
DH421073	7.3	8	76	114
DH421074	7.4	8	76	114
DH421075	7.5	8	76	114
DH421076	7.6	8	76	114
DH421077	7.7	8	76	114

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K							
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎		
ISO	N										S							H				
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc											15	30	25	38	34			55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommended																		◎				

**DH404, DH423, DH443, DH424, DH444** SERIES

without COOLANT HOLES

Vc = m/min.  
RPM = rev./min.  
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc	Parameter	Drill Diameter (mm)		Vc	Parameter	Drill Diameter (mm)			
					1.0	2.0			3.0	4.0	5.0	6.0
P	2	Non-alloy steel	70	RPM	22280	11140	100	RPM	10610	7960	6370	5310
				FEED	0.03-0.05	0.05-0.07		FEED	0.06-0.12	0.08-0.14	0.14-0.20	0.16-0.22
			70	RPM	22280	11140	100	RPM	10610	7960	6370	5310
	6	Low alloy steel	70	RPM	22280	11140	100	RPM	10610	7960	6370	5310
				FEED	0.03-0.05	0.05-0.07		FEED	0.06-0.12	0.08-0.14	0.14-0.20	0.16-0.22
			60	RPM	19100	9550	80	RPM	8490	6370	5090	4240
				FEED	0.03-0.05	0.05-0.07		FEED	0.04-0.10	0.07-0.13	0.10-0.16	0.12-0.18
			70	RPM	22280	11140	100	RPM	10610	7960	6370	5310
				FEED	0.03-0.05	0.05-0.07		FEED	0.06-0.12	0.08-0.14	0.14-0.20	0.16-0.22
			60	RPM	19100	9550	80	RPM	8490	6370	5090	4240
				FEED	0.03-0.05	0.05-0.07		FEED	0.06-0.12	0.08-0.14	0.14-0.20	0.16-0.22
60	RPM	19100	9550	80	RPM	8490	6370	5090	4240			
	FEED	0.02-0.04	0.03-0.05		FEED	0.04-0.10	0.07-0.13	0.10-0.16	0.12-0.18			
30	RPM	9550	4770	40	RPM	4240	3180	2550	2120			
	FEED	0.02-0.04	0.03-0.05		FEED	0.03-0.08	0.05-0.11	0.08-0.14	0.10-0.16			
50	RPM	15920	7960	70	RPM	7430	5570	4460	3710			
	FEED	0.03-0.05	0.05-0.07		FEED	0.04-0.10	0.07-0.13	0.10-0.16	0.12-0.18			
30	RPM	9550	4770	40	RPM	4240	3180	2550	2120			
	FEED	0.02-0.04	0.03-0.05		FEED	0.03-0.08	0.05-0.11	0.08-0.14	0.10-0.16			
50	RPM	15920	7960	70	RPM	7430	5570	4460	3710			
	FEED	0.03-0.05	0.05-0.07		FEED	0.06-0.12	0.08-0.14	0.14-0.20	0.16-0.22			
35	RPM	11140	5570	45	RPM	4770	3580	2860	2390			
	FEED	0.02-0.04	0.03-0.05		FEED	0.04-0.10	0.07-0.13	0.10-0.16	0.12-0.18			
K	15	Grey cast iron	70	RPM	22280	11140	100	RPM	10610	7960	6370	5310
				FEED	0.04-0.06	0.04-0.06		FEED	0.08-0.14	0.12-0.18	0.15-0.22	0.20-0.26
	65	RPM	20690	10350	80	RPM	8490	6370	5090	4240		
		FEED	0.04-0.06	0.04-0.06		FEED	0.06-0.12	0.08-0.14	0.14-0.20	0.16-0.22		
	70	RPM	22280	11140	100	RPM	10610	7960	6370	5310		
		FEED	0.04-0.06	0.04-0.06		FEED	0.08-0.14	0.12-0.18	0.15-0.22	0.20-0.26		
	50	RPM	15920	7960	70	RPM	7430	5570	4460	3710		
		FEED	0.04-0.06	0.04-0.06		FEED	0.06-0.12	0.08-0.14	0.14-0.20	0.16-0.22		
60	RPM	19100	9550	80	RPM	8490	6370	5090	4240			
	FEED	0.04-0.06	0.04-0.06		FEED	0.08-0.14	0.12-0.18	0.15-0.22	0.20-0.26			
50	RPM	15920	7960	70	RPM	7430	5570	4460	3710			
	FEED	0.03-0.05	0.05-0.07		FEED	0.06-0.12	0.08-0.14	0.14-0.20	0.16-0.22			
20	RPM	6370	3180	25	RPM	2650	1990	1590	1330			
	FEED	0.01-0.02	0.01-0.03		FEED	0.01-0.03	0.01-0.04	0.02-0.05	0.03-0.06			

ISO	VDI 3323	Material Description	Vc	Parameter	Drill Diameter (mm)						
					8.0	10.0	12.0	14.0	16.0	18.0	20.0
P	2	Non-alloy steel	100	RPM	3980	3180	2650	2270	1990	1770	1590
				FEED	0.18-0.24	0.19-0.27	0.21-0.29	0.23-0.31	0.25-0.33	0.28-0.38	0.30-0.40
			100	RPM	3980	3180	2650	2270	1990	1770	1590
	4	RPM	3980	3180	2650	2270	1990	1770	1590		
		FEED	0.14-0.20	0.15-0.23	0.17-0.25	0.18-0.26	0.19-0.27	0.20-0.30	0.22-0.32		
	80	RPM	3180	2550	2120	1820	1590	1410	1270		
		FEED	0.14-0.20	0.15-0.23	0.17-0.25	0.18-0.26	0.19-0.27	0.20-0.30	0.22-0.32		
	100	RPM	3980	3180	2650	2270	1990	1770	1590		
		FEED	0.18-0.24	0.19-0.27	0.21-0.29	0.23-0.31	0.25-0.33	0.28-0.38	0.30-0.40		
	80	RPM	3180	2550	2120	1820	1590	1410	1270		
		FEED	0.14-0.20	0.15-0.23	0.17-0.25	0.18-0.26	0.19-0.27	0.20-0.30	0.22-0.32		
40	RPM	1590	1270	1060	910	800	710	640			
	FEED	0.12-0.18	0.13-0.19	0.14-0.20	0.15-0.21	0.16-0.22	0.17-0.25	0.18-0.28			
70	RPM	2790	2230	1860	1590	1390	1240	1110			
	FEED	0.14-0.20	0.15-0.23	0.17-0.25	0.18-0.26	0.19-0.27	0.20-0.30	0.22-0.32			
40	RPM	1590	1270	1060	910	800	710	640			
	FEED	0.12-0.18	0.13-0.19	0.14-0.20	0.15-0.21	0.16-0.22	0.17-0.25	0.18-0.28			
70	RPM	2790	2230	1860	1590	1390	1240	1110			
	FEED	0.18-0.24	0.19-0.27	0.21-0.29	0.23-0.31	0.25-0.33	0.28-0.38	0.30-0.40			
45	RPM	1790	1430	1190	1020	900	800	720			
	FEED	0.14-0.20	0.15-0.23	0.17-0.25	0.18-0.26	0.19-0.27	0.20-0.30	0.22-0.32			
K	15	Grey cast iron	100	RPM	3980	3180	2650	2270	1990	1770	1590
				FEED	0.22-0.28	0.25-0.33	0.27-0.35	0.29-0.37	0.31-0.39	0.32-0.42	0.34-0.44
	80	RPM	3180	2550	2120	1820	1590	1410	1270		
		FEED	0.18-0.24	0.19-0.27	0.21-0.29	0.23-0.31	0.25-0.33	0.28-0.38	0.30-0.40		
	100	RPM	3980	3180	2650	2270	1990	1770	1590		
		FEED	0.22-0.28	0.25-0.33	0.27-0.35	0.29-0.37	0.31-0.39	0.32-0.42	0.34-0.44		
	70	RPM	2790	2230	1860	1590	1390	1240	1110		
		FEED	0.18-0.24	0.19-0.27	0.21-0.29	0.23-0.31	0.25-0.33	0.28-0.38	0.30-0.40		
80	RPM	3180	2550	2120	1820	1590	1410	1270			
	FEED	0.22-0.28	0.25-0.33	0.27-0.35	0.29-0.37	0.31-0.39	0.32-0.42	0.34-0.44			
70	RPM	2790	2230	1860	1590	1390	1240	1110			
	FEED	0.18-0.24	0.19-0.27	0.21-0.29	0.23-0.31	0.25-0.33	0.28-0.38	0.30-0.40			
25	RPM	990	800	660	570	500	440	400			
	FEED	0.03-0.06	0.04-0.07	0.04-0.08	0.05-0.09	0.05-0.09	0.05-0.10	0.05-0.10			

► Recommend to reduce the feed rate as following **Feed 100%** : DH404(3×D), DH423(3×D), DH424(5×D)



Global Cutting Tool Leader **YG-1**



# HOLEMAKING