



Leading Through Innovation



SOLID CARBIDE

ALU-POWER END MILLS

Alu - Power Fräser

- For Aluminium Alloys and Chatter Free Cutting
- Für Aluminiumlegierungen und weichen Schnitt

SELECTION GUIDE



SOLID CARBIDE
ALU POWER
END MILLS

Aluminium Alloys and Silent Cutting

Please visit
globalyg1.com/mat
for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : p. C536

SERIES	E5910	E5908	E5909
FLUTE	2	3	2
HELIX ANGLE	50°	40°	30°
CUTTING EDGE SHAPE	BALL NOSE	BALL NOSE	CORNER RADIUS
SIZE MIN	R3.0	R1.0	D4.0
SIZE MAX	R10.0	R8.0	D20.0
PAGE	C524	C525	C526
	NECK	NECK	NECK
	Uncoated	Uncoated	Uncoated



ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc			
P	1	Non-alloy steel	About 0.15% C Annealed	125				
	2		About 0.45% C Annealed	190	13			
	3		About 0.45% C Quenched & Tempered	250	25			
	4		About 0.75% C Annealed	270	28			
	5		About 0.75% C Quenched & Tempered	300	32			
	6	Low alloy steel	Annealed	180	10			
	7		Quenched & Tempered	275	29			
	8		Quenched & Tempered	300	32			
	9		Quenched & Tempered	350	38			
	10		High alloyed steel, and tool steel	Annealed	200	15		
	11	Quenched & Tempered		325	35			
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15			
	13		Martensitic Quenched & Tempered	240	23			
	14		Austenitic	180	10			
K	15	Grey cast iron	Pearlitic / ferritic	180	10			
	16		Pearlitic (Martensitic)	260	26			
	17	Nodular cast iron	Ferritic	160	3			
	18		Pearlitic	250	25			
	19		Ferritic	130				
20	Malleable cast iron	Pearlitic	230	21				
N	21	Aluminum-wrought alloy	Not Curable	60		◎	◎	◎
	22		Curable Hardened	100		◎	◎	◎
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75		◎	◎	◎
	24		≤ 12% Si, Curable Hardened	90		◎	◎	◎
	25		> 12% Si, Not Curable	130		○	○	○
	26		Copper and Copper Alloys (Bronze / Brass)	CuZn, CuSnZn (Brass)	110		○	○
	27	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic			○	○	○
	28		Rubber, Wood, etc.			○	○	○
	29						◎	
	S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15	
32		Cured			280	30		
33		Ni or Co Based		Annealed	250	25		
34				Cured	350	38		
35				Cast	320	34		
36		Titanium Alloys	Pure Titanium	400 Rm				
37	Alpha + Beta Alloys		Hardened 1050 Rm					
H	38	Hardened steel	Hardened	550	55			
	39		Hardened	630	60			
	40	Chilled Cast Iron	Cast	400	42			
	41	Hardened Cast Iron	Hardened	550	55			

E5930	E5E51	E5E47	E5E48	E5522 E5521	E5E49	E5E50	E5742 E5711	E5E39 E5E40
2	3	1	2	2	3	3	3	3
25°	45°	30°	45°	45°	45°	45°	30°	30°
CORNER RADIUS	CORNER RADIUS	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	ROUGHING	ROUGHING
D2.0	D3.0	D2.0	D3.0	D3.0	D3.0	D3.0	D6.0	D6.0
D20.0	D20.0	D12.0	D20.0	D20.0	D20.0	D20.0	D25.0	D20.0
C527	C528	C529	C530	C531	C532	C533	C534	C535
NECK	LONG LENGTH	-	SHORT LENGTH	LONG LENGTH	LONG LENGTH	NECK	LONG LENGTH	NECK
Uncoated	Uncoated	Uncoated	Uncoated	Uncoated	Uncoated	Uncoated	Uncoated	Uncoated



							○	○	1
							○	○	2
							○	○	3
							○	○	4
									5
							○	○	6
							○	○	7
									8
									9
							○	○	10
									11
									12
									13
									14
							○	○	15
							○	○	16
							○	○	17
							○	○	18
							○	○	19
							○	○	20
	◎	◎	◎	◎	◎	◎	◎	◎	21
	◎	◎	◎	◎	◎	◎	◎	◎	22
	◎	◎	◎	◎	◎	◎	◎	◎	23
	◎	◎	◎	◎	◎	◎	◎	◎	24
	○	○	○	○	○	○	○	○	25
									26
									27
									28
									29
									30
									31
									32
									33
									34
									35
									36
									37
									38
									39
									40
									41

HSS

CBN END MILLS

i-Xmill END MILLS

i-SMART MODULAR END MILLS

X1-EH END MILLS

X5070 END MILLS

4G MILL END MILLS

X-POWER PRO END MILLS

TitaNox-POWER END MILLS

JET-POWER END MILLS

V7 PLUS END MILLS

ALU-POWER HPC END MILLS

ALU-POWER END MILLS

D-POWER GRAPHITE END MILLS

CRX S END MILLS

K-2 END MILLS

ONLY ONE COATED PM60 END MILLS

TANK POWER END MILLS

GENERAL HSS END MILLS

MILLING CUTTERS


TECHNICAL DATA

CARBIDE, 2 FLUTE 50° HELIX BALL NOSE with NECK

● VOLLHARTMETALL, 2 SCHNEIDEN 50° RECHTSSPIRALE STIRNRADIUS MIT ABGESETZTEM SCHAFTTETL
 (●) FRAISE CARBURE, 2 DENTS, HÉMISPHERIQUE, HÉLICE 50°, DÉTALONNÉE
 (●) 2 TAGLIENTI, ELICA 50°, SEMISFERICA, SCARICATA

- ▶ Excellent cutting qualities on aluminum and copper
- ▶ Increased tool life and higher cutting accuracy
- ▶ Mirror surface - Excellent surface finish

- ▶ Ausgezeichnete Schneideigenschaften in Aluminium, Kupfer
- ▶ Verbesserte Standzeiten und höhere Fräsgenauigkeit.
- ▶ Spiegel-Oberfläche - Hervorragendes Oberflächenfinishing.

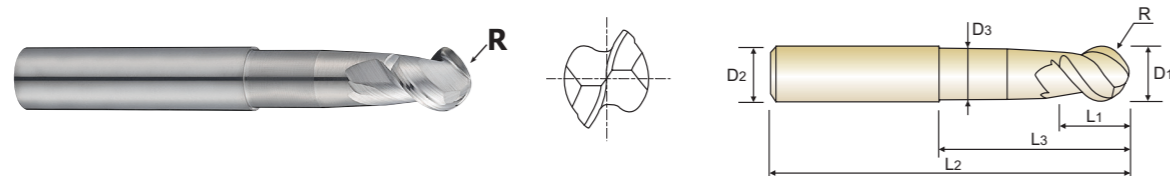

Recommended ToolHolder	Flat Shank	Plain Shank
	END MILL HOLDER	HYDRAULIC CHUCK SHRINK FIT HOLDER POWER MILLING CHUCK ER COLLET CHUCK

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R(±0.02)	D1	D2	L1	L3	L2	D3
E5910060	R3.0	6.0	6	5.5	25	55	5.4
E5910080	R4.0	8.0	8	7	30	65	7.2
E5910100	R5.0	10.0	10	8.5	35	75	9
E5910120	R6.0	12.0	12	10.5	40	75	11
E5910160	R8.0	16.0	16	14	50	90	14.5
E5910200	R10.0	20.0	20	17	50	100	18

▶ TiN, TiCN and TiAlN Coatings are available on your request.

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
± 0.02	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

CARBIDE, 3 FLUTE 40° HELIX BALL NOSE with NECK

● VOLLHARTMETALL, 3 SCHNEIDEN 40° RECHTSSPIRALE STIRNRADIUS MIT ABGESETZTEM SCHAFTTETL
 (●) FRAISE CARBURE, 3 DENTS, HÉMISPHERIQUE, HÉLICE 40°, DÉTALONNÉE
 (●) 3 TAGLIENTI, ELICA 40°, SEMISFERICA, SCARICATA

- ▶ Excellent cutting qualities on aluminum and copper
- ▶ Increased tool life and higher cutting accuracy
- ▶ Mirror surface - Excellent surface finish

- ▶ Ausgezeichnete Schneideigenschaften in Aluminium, Kupfer
- ▶ Verbesserte Standzeiten und höhere Fräsgenauigkeit.
- ▶ Spiegel-Oberfläche - Hervorragendes Oberflächenfinishing.



Recommended ToolHolder	Flat Shank	Plain Shank
	END MILL HOLDER	HYDRAULIC CHUCK SHRINK FIT HOLDER POWER MILLING CHUCK ER COLLET CHUCK

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R(±0.02)	D1	D2	L1	L3	L2	D3
E5908020	R1.0	2.0	6	3	5	60	1.9
E5908025	R1.25	2.5	6	4	6	60	2.4
E5908030	R1.5	3.0	6	4.5	6.5	60	2.8
E5908035	R1.75	3.5	6	5	7	65	3.2
E5908040	R2.0	4.0	6	6	8	65	3.7
E5908050	R2.5	5.0	6	7.5	10	65	4.6
E5908060	R3.0	6.0	6	9	12	75	5.6
E5908080	R4.0	8.0	8	12	25	75	7.4
E5908100	R5.0	10.0	10	15	30	80	9.4
E5908120	R6.0	12.0	12	18	36	90	11.4
E5908160	R8.0	16.0	16	24	40	100	15.4

▶ TiN, TiCN and TiAlN Coatings are available on your request.

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎


ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

CARBIDE, 2 FLUTE CORNER RADIUS with NECK

- VOLLHARTMETALL, 2 SCHNEIDEN ECKENRADIUS MIT ABGESETZTEM SCHAFTTETL
- FRAISE CARBURE, 2 DENTS, TORIQUE, DÉTALONNÉE
- 2 TAGLIENTI, TORICA, SCARICATA

- ▶ Excellent cutting qualities on aluminum and copper
- ▶ Increased tool life and higher cutting accuracy
- ▶ Mirror surface - Excellent surface finish
- ▶ Superior chip evacuation
- ▶ Reduces chipping of corner edges

- ▶ Ausgezeichnete Schneideigenschaften in Aluminium, Kupfer
- ▶ Verbesserte Standzeiten und höhere Fräsengenauigkeit.
- ▶ Spiegel-Oberfläche - Hervorragendes Oberflächenfinishing.
- ▶ Überlegene Spanabfuhr
- ▶ Reduzierung von Schneideckenausbrüchen.

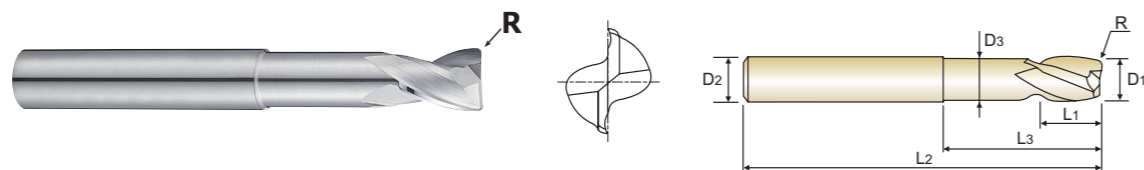

CARBIDE 2 30° ±0.01 PLAIN UNCOATED p.C537

Recommended ToolHolder	Flat Shank	Plain Shank
	END MILL HOLDER	HYDRAULIC CHUCK
	○	SHRINK FIT HOLDER
	○	POWER MILLING CHUCK

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut		Overall Length	Neck Diameter
	R(±0.01)	D1	D2	L1	L3	L2	D3
E5909040	R0.3	4.0	6.0	5	10	50	3.6
E5909060	R0.5	6.0	6.0	8	20	60	5.4
E5909080	R0.6	8.0	8.0	10	30	70	7.2
E5909100	R0.8	10.0	10.0	12	36	80	9
E5909120	R1.0	12.0	12.0	14	40	90	11
E5909160	R1.3	16.0	16.0	18	45	100	14.5
E5909200	R1.6	20.0	20.0	24	45	100	18

▶ TiN, TiCN and TiAlN Coatings are available on your request.

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO Material Description	N					S					H											
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	55	60	42	55	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

CARBIDE, 2 FLUTE 25° HELIX CORNER RADIUS with NECK

- VOLLHARTMETALL, 2 SCHNEIDEN 25° RECHTSSPIRALE ECKENRADIUS MIT ABGESETZTEM SCHAFTTETL
- FRAISE CARBURE, 2 DENTS, TORIQUE, HÉLICE 25°, DÉTALONNÉE
- 2 TAGLIENTI, ELICA 25°, TORICA, SCARICATA

- ▶ Designed for machining aluminum, aluminum alloys and non-ferrous material
- ▶ Mirror surface - Excellent surface finish
- ▶ Increased tool life and higher cutting accuracy
- ▶ Maximum-metal removal rate
- ▶ Superior chip evacuation
- ▶ Corner Radius to avoid chipping problems

- ▶ Entwickelt für die Bearbeitung von Aluminium, Aluminiumlegierungen, NE-Metalle
- ▶ Spiegel-Oberfläche - Hervorragendes Oberflächenfinishing.
- ▶ Verbesserte Standzeiten und höhere Fräsengenauigkeit.
- ▶ Maximale Zerspanungsleistung.
- ▶ Überlegene Spanabfuhr
- ▶ Eckradien verhindern Schneidkantenausbrüche



CARBIDE 2 25° ±0.01 PLAIN UNCOATED p.C536

Recommended ToolHolder	Flat Shank	Plain Shank
	END MILL HOLDER	HYDRAULIC CHUCK
	○	SHRINK FIT HOLDER
	○	POWER MILLING CHUCK

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut		Overall Length	Neck Diameter
	R(±0.01)	D1	D2	L1	L3	L2	D3
E5930020	R0.2	2.0	3	3	6	40	1.9
E5930030	R0.2	3.0	3	4	8	40	2.9
E5930040	R0.2	4.0	4	5	12	50	3.8
E5930050	R0.2	5.0	5	8	14	50	4.8
E5930060	R0.2	6.0	6	8	18	65	5.7
E5930080	R0.2	8.0	8	10	22	70	7.7
E5930100	R0.2	10.0	10	14	28	80	9.7
E5930120	R0.2	12.0	12	16	35	90	11.5
E5930160	R0.2	16.0	16	20	40	90	15.5
E5930200	R0.2	20.0	20	25	50	100	19.5

▶ TiN, TiCN and TiAlN Coatings are available on your request.

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○


ISO Material Description	N					S					H											
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	55	60	42	55	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

CARBIDE, 3 FLUTE 45° HELIX LONG LENGTH CORNER RADIUS

● **VOLLHARTMETALL, 3 SCHNEIDEN 45° RECHTSSPIRALE LANG ECKENRADIUS**
 ○ **FRAISE CARBURE, 3 DENTS, TORIQUE, HÉLICE 45°, LONGUE**
 ◎ **3 TAGLIENTI, ELICA 45°, TORICA, SERIE LUNGA**

- ▶ Excellent cutting qualities on aluminum and copper
- ▶ Increased tool life and higher cutting accuracy
- ▶ Mirror surface - Excellent surface finish
- ▶ Superior chip evacuation
- ▶ Reduces chipping of corner edges

- ▶ Ausgezeichnete Schneideigenschaften in Aluminium, Kupfer
- ▶ Verbesserte Standzeiten und höhere Fräsengenauigkeit.
- ▶ Spiegel-Oberfläche - Hervorragendes Oberflächenfinishing.
- ▶ Überlegene Spanabfuhr
- ▶ Reduzierung von Schneideckenausbrüchen.

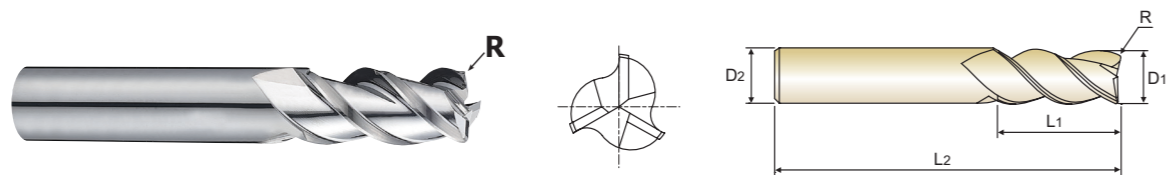


Recommended ToolHolder	Flat Shank	Plain Shank
	END MILL HOLDER	HYDRAULIC CHUCK
	○	SHRINK FIT HOLDER
	○	POWER MILLING CHUCK
		ER COLLET CHUCK

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	R	D1	D2	L1	L2
E5E51030	R0.5	3.0	6	12	57
E5E51901	R1.0	3.0	6	12	57
E5E51040	R0.5	4.0	6	15	57
E5E51902	R1.0	4.0	6	15	57
E5E51050	R0.5	5.0	6	20	57
E5E51903	R1.0	5.0	6	20	57
E5E51060	R0.5	6.0	6	20	65
E5E51904	R1.0	6.0	6	20	65
E5E51080	R0.5	8.0	8	22	65
E5E51905	R1.0	8.0	8	22	65
E5E51100	R0.5	10.0	10	25	70
E5E51906	R1.0	10.0	10	25	70
E5E51907	R2.0	10.0	10	25	70
E5E51120	R0.5	12.0	12	25	75
E5E51908	R1.0	12.0	12	25	75
E5E51909	R2.0	12.0	12	25	75
E5E51160	R0.5	16.0	16	35	90
E5E51910	R1.0	16.0	16	35	90
E5E51911	R2.0	16.0	16	35	90
E5E51200	R0.5	20.0	20	40	100
E5E51912	R1.0	20.0	20	40	100
E5E51913	R2.0	20.0	20	40	100

▶ TiN, TiCN and TiAlN Coatings are available on your request.

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ -0.015	h5

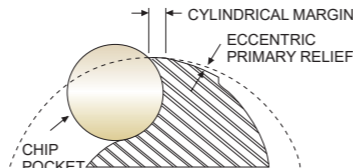

◎ : Excellent ○ : Good

ISO Material Description	P										M						K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎		


ISO Material Description	N										S						H						
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550		
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎		

CARBIDE, 1 FLUTE

● **VOLLHARTMETALL, 1 SCHNEIDEN**
 ○ **FRAISE CARBURE, 1 DENT**
 ◎ **1 TAGLIENTE**

- ▶ Designed for non-ferrous material, non-metal like aluminum and acrylic
- ▶ 1 Flute allows excellent finished workpiece and chip evacuation

- ▶ Entwickelt für NE-Metalle und nichtmetallische Werkstoffe wie Aluminium und Acryl
- ▶ 1 Spannute ermöglicht hervorragende Werkstückoberflächen und Spanabfuhr

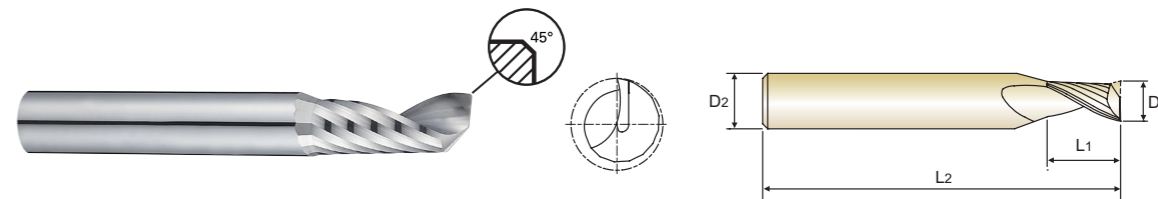


Recommended ToolHolder	Flat Shank	Plain Shank
	END MILL HOLDER	HYDRAULIC CHUCK
	○	SHRINK FIT HOLDER
	○	POWER MILLING CHUCK
		ER COLLET CHUCK

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Chamfer
	D1	D2	L1	L2	
E5E47020	2.0	3	8	50	0.04
E5E47030	3.0	3	12	50	0.05
E5E47040	4.0	4	15	60	0.07
E5E47050	5.0	5	17	60	0.09
E5E47060	6.0	6	20	65	0.10
E5E47080	8.0	8	22	65	0.14
E5E47100	10.0	10	25	75	0.14
E5E47120	12.0	12	30	80	0.14

▶ TiN, TiCN and TiAlN Coatings are available on your request.

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ -0.03	h5

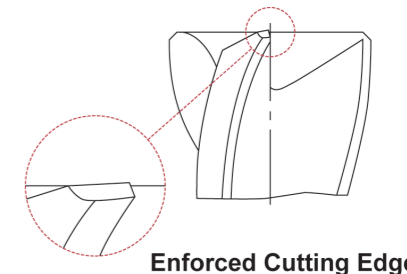

Enforced Cutting Edge

◎ : Excellent ○ : Good

ISO Material Description	P										M						K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎		


ISO Material Description	N										S						H						
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550		
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎		

CARBIDE, 2 FLUTE 45° HELIX SHORT LENGTH

- VOLLHARTMETALL, 2 SCHNEIDEN 45° RECHTSSPIRALE KURZ
- FRAISE CARBURE, 2 DENTS, HÉLICE 45°, COURTE
- 2 TAGLIENTI, ELICA 45°, SERIE CORTA

- ▶ Suitable for high speed machining in aluminum and other non-ferrous materials
- ▶ Mirror surface - Excellent surface finish
- ▶ Superior chip evacuation

- ▶ Zur HSC- Bearbeitung von Aluminium und anderen Nichteisenmetallen.
- ▶ Spiegel-Oberfläche - Hervorragendes Oberflächenfinishing.
- ▶ Überlegene Spanabfuhr

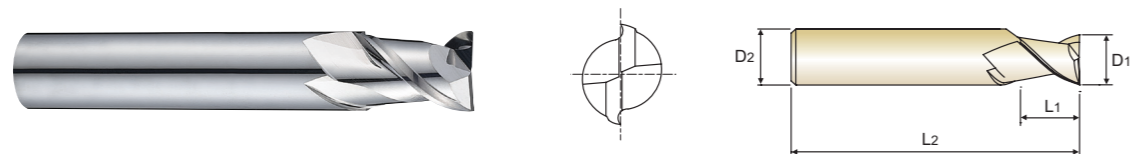



Recommended ToolHolder	Flat Shank	Plain Shank
	END MILL HOLDER	HYDRAULIC CHUCK SHRINK FIT HOLDER POWER MILLING CHUCK ER COLLET CHUCK

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	D1	D2	L1	L2
E5E48030	3.0	6	5	50
E5E48040	4.0	6	8	54
E5E48050	5.0	6	9	54
E5E48060	6.0	6	10	54
E5E48080	8.0	8	12	58
E5E48100	10.0	10	14	66
E5E48120	12.0	12	16	73
E5E48140	14.0	14	18	75
E5E48160	16.0	16	22	82
E5E48180	18.0	18	24	84
E5E48200	20.0	20	26	92

▶ TiN, TiCN and TiAlN Coatings are available on your request.

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ -0.015	h5

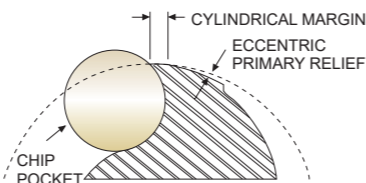

Enforced Cutting Edge

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎


ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

CARBIDE, 2 FLUTE 45° HELIX LONG LENGTH

- VOLLHARTMETALL, 2 SCHNEIDEN 45° RECHTSSPIRALE LANG
- FRAISE CARBURE, 2 DENTS, HÉLICE 45°, LONGUE
- 2 TAGLIENTI, ELICA 45°, SERIE LUNGA

- ▶ Suitable for high speed machining in aluminum and other non-ferrous materials
- ▶ Mirror surface - Excellent surface finish
- ▶ Superior chip evacuation
- ▶ Reduces chipping of corner edges

- ▶ Zur HSC- Bearbeitung von Aluminium und anderen Nichteisenmetallen.
- ▶ Spiegel-Oberfläche - Hervorragendes Oberflächenfinishing.
- ▶ Überlegene Spanabfuhr
- ▶ Reduzierung von Schneideckenausbrüchen.

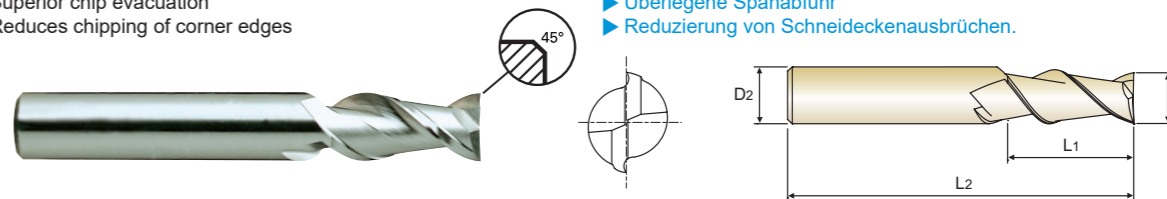



Recommended ToolHolder	Flat Shank	Plain Shank
	END MILL HOLDER	HYDRAULIC CHUCK SHRINK FIT HOLDER POWER MILLING CHUCK ER COLLET CHUCK

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall length	Chamfer	
	D1	D2	L1	L2		
PLAIN	FLAT	D1	D2	L1	L2	
E5522030	E5521030	3.0	6	8	57	0.05
E5522040	E5521040	4.0	6	11	57	0.05
E5522050	E5521050	5.0	6	13	57	0.05
E5522060	E5521060	6.0	6	13	57	0.05
E5522080	E5521080	8.0	8	19	63	0.05
E5522100	E5521100	10.0	10	22	72	0.10
E5522120	E5521120	12.0	12	26	83	0.10
E5522140	E5521140	14.0	14	26	83	0.10
E5522160	E5521160	16.0	16	32	92	0.10
E5522180	E5521180	18.0	18	32	92	0.10
E5522200	E5521200	20.0	20	38	104	0.10

▶ TiN, TiCN and TiAlN Coatings are available on your request.

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ -0.015	h5

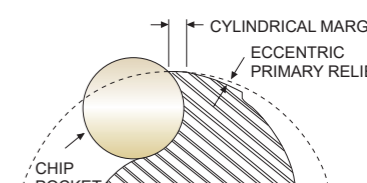

Enforced Cutting Edge

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎


ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

CARBIDE, 3 FLUTE 45° HELIX LONG LENGTH

- VOLLHARTMETALL, 3 SCHNEIDEN 45° RECHTSSPIRALE LANG
- FRAISE CARBURE, 3 DENTS, HÉLICE 45°, LONGUE
- 3 TAGLIENTI, ELICA 45°, SERIE LUNGA

- ▶ Excellent cutting qualities on aluminum and copper
- ▶ Increased tool life and higher cutting accuracy
- ▶ Mirror surface - Excellent surface finish
- ▶ Superior chip evacuation

- ▶ Ausgezeichnete Schneideigenschaften in Aluminium, Kupfer
- ▶ Verbesserte Standzeiten und höhere Fräsgenauigkeit.
- ▶ Spiegel-Oberfläche - Hervorragendes Oberflächenfinishing.
- ▶ Überlegene Spanabfuhr

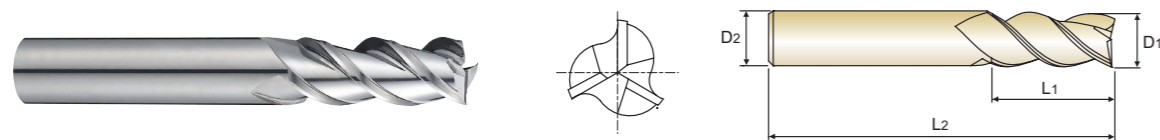



Recommended ToolHolder	Flat Shank	Plain Shank
	END MILL HOLDER	HYDRAULIC CHUCK SHRINK FIT HOLDER POWER MILLING CHUCK ER COLLET CHUCK

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	D1	D2	L1	L2
E5E49030	3.0	6	12	57
E5E49040	4.0	6	15	57
E5E49050	5.0	6	20	57
E5E49060	6.0	6	20	65
E5E49080	8.0	8	22	65
E5E49100	10.0	10	25	70
E5E49120	12.0	12	25	75
E5E49160	16.0	16	35	90
E5E49200	20.0	20	40	100

▶ TiN, TiCN and TiAlN Coatings are available on your request.

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ -0.015	h5

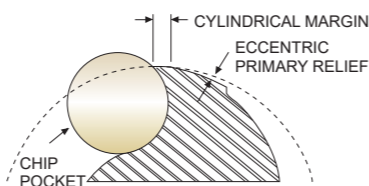

Enforced Cutting Edge

◎ : Excellent ○ : Good

ISO Material Description	P									M				K						
	Non-alloy steel			Low alloy steel			High alloyed steel, and tool steel			Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron					
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

CARBIDE, 3 FLUTE 45° HELIX with NECK

- VOLLHARTMETALL, 3 SCHNEIDEN 45° RECHTSSPIRALE MIT ABGESETZTEM SCHAFTTETEL
- FRAISE CARBURE, 3 DENTS, HÉLICE 45°, DÉTALONNÉE
- 3 TAGLIENTI, ELICA 45°, SCARICATA

- ▶ Excellent cutting qualities on aluminum and copper
- ▶ Increased tool life and higher cutting accuracy
- ▶ Mirror surface - Excellent surface finish
- ▶ Superior chip evacuation

- ▶ Ausgezeichnete Schneideigenschaften in Aluminium, Kupfer
- ▶ Verbesserte Standzeiten und höhere Fräsgenauigkeit.
- ▶ Spiegel-Oberfläche - Hervorragendes Oberflächenfinishing.
- ▶ Überlegene Spanabfuhr





Recommended ToolHolder	Flat Shank	Plain Shank
	END MILL HOLDER	HYDRAULIC CHUCK SHRINK FIT HOLDER POWER MILLING CHUCK ER COLLET CHUCK

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	D1	D2	L1	L3	L2	D3
E5E50030	3.0	6	8	12	57	2.7
E5E50040	4.0	6	11	18	57	3.7
E5E50050	5.0	6	13	18	57	4.7
E5E50060	6.0	6	13	18	57	5.7
E5E50080	8.0	8	21	25	63	7.4
E5E50100	10.0	10	22	30	72	9.2
E5E50120	12.0	12	26	36	83	11
E5E50160	16.0	16	36	42	92	15
E5E50200	20.0	20	41	52	104	19

▶ TiN, TiCN and TiAlN Coatings are available on your request.

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ -0.015	h5

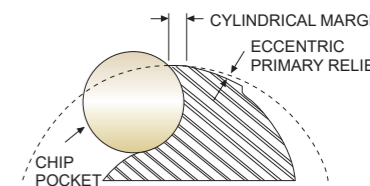

Enforced Cutting Edge

◎ : Excellent ○ : Good

ISO Material Description	P									M				K						
	Non-alloy steel			Low alloy steel			High alloyed steel, and tool steel			Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron					
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎


ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

CARBIDE, 3 FLUTE LONG LENGTH ROUGHING

● VOLLHARTMETALL, 3 SCHNEIDEN LANG SCHRUPPFRÄSER
○ FRAISE CARBURE, 3 DENTS, ÉBAUCHE, LONGUE
○ 3 TAGLIENTI, PER SGROSSATURA, SERIE LUNGA

- ▶ Excellent cutting qualities on aluminum and copper
- ▶ Increased tool life and higher cutting accuracy
- ▶ Mirror surface - Excellent surface finish

- ▶ Ausgezeichnete Schneideigenschaften in Aluminium, Kupfer
- ▶ Verbesserte Standzeiten und höhere Fräsgenauigkeit.
- ▶ Spiegel-Oberfläche - Hervorragendes Oberflächenfinishing.

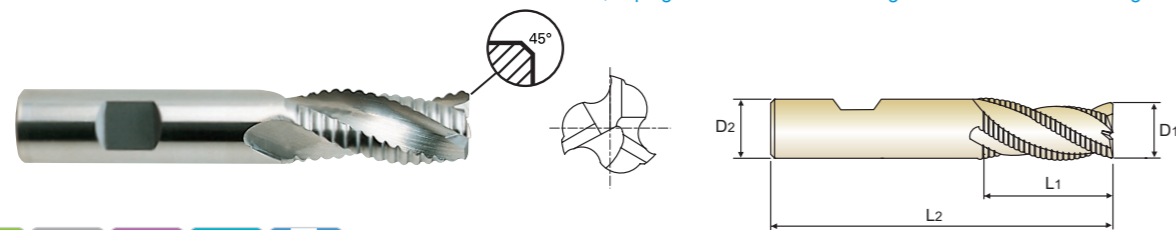

Recommended ToolHolder	Flat Shank	Plain Shank
	END MILL HOLDER	HYDRAULIC CHUCK SHRINK FIT HOLDER POWER MILLING CHUCK ER COLLET CHUCK


Unit : mm

EDP No.		Mill Diameter	Shank Diameter	Length of Cut	Overall length	Chamfer
PLAIN	FLAT	D1	D2	L1	L2	
E5742060	E5711060	6.0	6	16	57	0.60
E5742070	E5711070	7.0	8	16	63	0.60
E5742080	E5711080	8.0	8	16	63	0.60
E5742090	E5711090	9.0	10	19	72	0.60
E5742100	E5711100	10.0	10	22	72	0.60
E5742120	E5711120	12.0	12	26	83	0.60
E5742140	E5711140	14.0	14	26	83	0.91
E5742160	E5711160	16.0	16	32	92	0.91
E5742180	E5711180	18.0	18	32	92	0.91
E5742200	E5711200	20.0	20	38	104	0.91
E5742250	E5711250	25.0	25	45	121	0.91

▶ TiN, TiCN and TiAlN Coatings are available on your request.

Tolerances according to DIN 7160 & 7161

Tolerance range in μm					
Nominal-Diameter in mm					
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30
h10	0 -40	0 -48	0 -58	0 -70	0 -84
h5	0 -4	0 -5	0 -6	0 -8	0 -9



Enforced Cutting Edge

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	45	15	35	40	48	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	400	200	240	240	180	180	260	160	250	130	230
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○


ISO Material Description	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

CARBIDE, 3 FLUTE ROUGHING with NECK

● VOLLHARTMETALL, 3 SCHNEIDEN SCHRUPPFRÄSER MIT ABGESETZTEM SCHAFTTTEL
○ FRAISE CARBURE, 3 DENTS, ÉBAUCHE DÉTALONNÉE
○ 3 TAGLIENTI, PER SGROSSATURA, SCARICATA

- ▶ Excellent cutting qualities on aluminum and copper
- ▶ Increased tool life and higher cutting accuracy
- ▶ Mirror surface - Excellent surface finish

- ▶ Ausgezeichnete Schneideigenschaften in Aluminium, Kupfer
- ▶ Verbesserte Standzeiten und höhere Fräsgenauigkeit.
- ▶ Spiegel-Oberfläche - Hervorragendes Oberflächenfinishing.

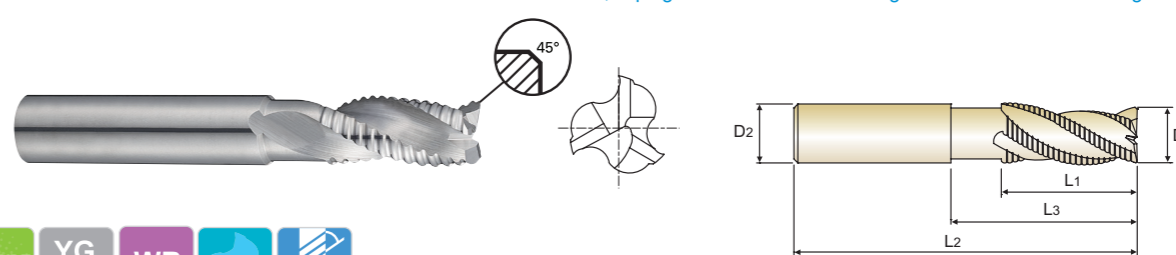

Recommended ToolHolder	Flat Shank	Plain Shank
	END MILL HOLDER	HYDRAULIC CHUCK SHRINK FIT HOLDER POWER MILLING CHUCK ER COLLET CHUCK


Unit : mm

EDP No.		Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall length	Neck Diameter	Chamfer
PLAIN	FLAT	D1	D2	L1	L3	L2	D3	
E5E39060	E5E40060	6.0	6	16	20	57	5	0.60
E5E39080	E5E40080	8.0	8	16	25	63	7	0.60
E5E39100	E5E40100	10.0	10	22	30	72	9	0.60
E5E39120	E5E40120	12.0	12	26	36	83	10.5	0.60
E5E39160	E5E40160	16.0	16	32	42	92	14.5	0.91
E5E39200	E5E40200	20.0	20	38	52	104	18.5	0.91

▶ TiN, TiCN and TiAlN Coatings are available on your request.

Tolerances according to DIN 7160 & 7161

Tolerance range in μm					
Nominal-Diameter in mm					
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30
h10	0 -40	0 -48	0 -58	0 -70	0 -84
h5	0 -4	0 -5	0 -6	0 -8	0 -9



Enforced Cutting Edge

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	45	15	35	40	48	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	400	200	240	240	180	180	260	160	250	130	230
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO Material Description	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○



RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER




RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

E5910 SERIES 2 FLUTE BALL


Table with columns: ISO, VDI 3323, Material Description, Ae, Ap, Parameter, Diameter (Ø) (6.0, 8.0, 10.0, 12.0, 16.0, 20.0). Rows include Aluminum-wrought alloy, Aluminum-cast alloyed, and Copper and Copper Alloys (Bronze / Brass).

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.



E5908 SERIES 3 FLUTE BALL


Table with columns: ISO, VDI 3323, Material Description, Ae, Ap, Parameter, Diameter (Ø) (2.0, 2.5, 3.0, 3.5, 4.0, 5.0, 6.0, 8.0, 10.0, 12.0, 16.0). Rows include Aluminum-wrought alloy, Aluminum-cast alloyed, and Copper and Copper Alloys (Bronze / Brass).



E5930 SERIES


2 FLUTE CORNER RADIUS - SLOTTING

Table with columns: ISO, VDI 3323, Material Description, Ae, Ap, Parameter, Diameter (Ø) (2.0, 3.0, 4.0, 5.0, 6.0, 8.0, 10.0, 12.0, 16.0, 20.0). Rows include Aluminum-wrought alloy and Aluminum-cast alloyed.



2 FLUTE CORNER RADIUS - SIDE CUTTING

Table with columns: ISO, VDI 3323, Material Description, Ae, Ap, Parameter, Diameter (Ø) (2.0, 3.0, 4.0, 5.0, 6.0, 8.0, 10.0, 12.0, 16.0, 20.0). Rows include Aluminum-wrought alloy and Aluminum-cast alloyed.

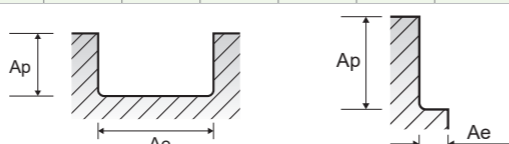

E5909 SERIES


2 FLUTE CORNER RADIUS - SLOTTING

Table with columns: ISO, VDI 3323, Material Description, Ae, Ap, Parameter, Diameter (Ø) (4.0, 6.0, 8.0, 10.0, 12.0, 16.0, 20.0). Rows include Aluminum-wrought alloy, Aluminum-cast alloyed, and Copper and Copper Alloys (Bronze / Brass).

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.

2 FLUTE CORNER RADIUS - SIDE CUTTING

Table with columns: ISO, VDI 3323, Material Description, Ae, Ap, Parameter, Diameter (Ø) (4.0, 6.0, 8.0, 10.0, 12.0, 16.0, 20.0). Rows include Aluminum-wrought alloy, Aluminum-cast alloyed, and Copper and Copper Alloys (Bronze / Brass).

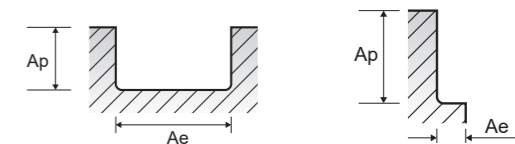


E5E51 SERIES

3 FLUTE CORNER RADIUS - SLOTTING

Table with columns: ISO, VDI 3323, Material Description, Ae, Ap, Parameter, Diameter (Ø) (3.0, 4.0, 5.0, 6.0, 8.0, 10.0, 12.0, 16.0, 20.0). Rows include Aluminum-wrought alloy and Aluminum-cast alloyed.

3 FLUTE CORNER RADIUS - SIDE CUTTING

Table with columns: ISO, VDI 3323, Material Description, Ae, Ap, Parameter, Diameter (Ø) (3.0, 4.0, 5.0, 6.0, 8.0, 10.0, 12.0, 16.0, 20.0). Rows include Aluminum-wrought alloy and Aluminum-cast alloyed.

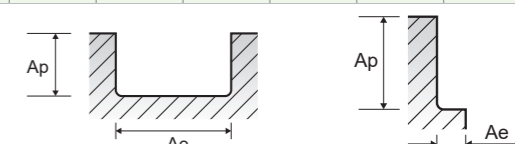


CBN END MILLS
i-Xmill END MILLS
i-SMART MODULAR END MILLS
X1-EH END MILLS
X5070 END MILLS
4G MILL END MILLS
X-POWER PRO END MILLS
TiTaNox-POWER END MILLS
JET-POWER END MILLS
V7 PLUS END MILLS
ALU-POWER HPC END MILLS
ALU-POWER END MILLS
D-POWER GRAPHITE END MILLS
CRX S END MILLS
K-2 END MILLS
ONLY ONE COATED PM60 END MILLS
TANK POWER END MILLS
GENERAL HSS END MILLS
MILLING CUTTERS
TECHNICAL DATA

CBN END MILLS
i-Xmill END MILLS
i-SMART MODULAR END MILLS
X1-EH END MILLS
X5070 END MILLS
4G MILL END MILLS
X-POWER PRO END MILLS
TiTaNox-POWER END MILLS
JET-POWER END MILLS
V7 PLUS END MILLS
ALU-POWER HPC END MILLS
ALU-POWER END MILLS
D-POWER GRAPHITE END MILLS
CRX S END MILLS
K-2 END MILLS
ONLY ONE COATED PM60 END MILLS
TANK POWER END MILLS
GENERAL HSS END MILLS
MILLING CUTTERS
TECHNICAL DATA

E5E47 SERIES 1 FLUTE - SLOTTING

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)										
						2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0			
N	21~22	Aluminum-wrought alloy	1.0D	1.5D	Vc	145	170	190	190	190	195	190	190			
					fz	0.065	0.094	0.120	0.150	0.180	0.244	0.333	0.440			
					RPM	23077	18038	15120	12096	10080	7759	6048	5040			
N	23~24	Aluminum-cast, alloyed	1.0D	1.5D	Vc	94	111	124	124	124	127	124	124			
					fz	0.065	0.094	0.120	0.150	0.180	0.244	0.333	0.440			
					RPM	15000	11724	9828	7862	6552	5043	3931	3276			
N	29.1	Non Metallic Materials (Duroplastic)	1.0D	1.5D	Vc	200	235	250	235	255	250	250	255			
					fz	0.069	0.096	0.120	0.147	0.170	0.240	0.300	0.343			
					RPM	31831	24934	19894	14961	13528	9947	7958	6764			
					FEED	2196	2394	2387	2199	2300	2387	2387	2300	2387	2387	2300




E5E49, E5E50 SERIES 3 FLUTE - SLOTTING

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)									
						3.0	4.0	5.0	6.0	8.0	9.0	10.0	12.0	16.0	20.0
N	21~22	Aluminum-wrought alloy	1.0D	0.5D	Vc	65	90	110	130	140	160	175	210	210	175
					fz	0.035	0.045	0.050	0.060	0.088	0.097	0.106	0.131	0.158	0.200
					RPM	6897	7162	7003	6897	5570	5659	5570	5570	4178	2785
N	23~24	Aluminum-cast, alloyed	1.0D	0.5D	Vc	42	59	72	85	91	104	114	137	137	114
					fz	0.035	0.045	0.050	0.060	0.088	0.097	0.106	0.131	0.158	0.200
					RPM	4483	4655	4552	4483	3621	3678	3621	3621	2716	1810
					FEED	471	628	683	807	956	1070	1151	1423	1287	1086

3 FLUTE - SIDE CUTTING

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)									
						3.0	4.0	5.0	6.0	8.0	9.0	10.0	12.0	16.0	20.0
N	21~22	Aluminum-wrought alloy	0.15D	1.5D ~ 2.5D	Vc	65	90	110	130	140	160	175	210	210	175
					fz	0.045	0.055	0.065	0.075	0.113	0.122	0.131	0.163	0.200	0.238
					RPM	6897	7162	7003	6897	5570	5659	5570	5570	4178	2785
N	23~24	Aluminum-cast, alloyed	0.15D	1.5D ~ 2.5D	Vc	42	59	72	85	91	104	114	137	137	114
					fz	0.045	0.055	0.065	0.075	0.113	0.122	0.131	0.163	0.200	0.238
					RPM	4483	4655	4552	4483	3621	3678	3621	3621	2716	1810
					FEED	605	768	888	1009	1227	1346	1423	1771	1629	1293

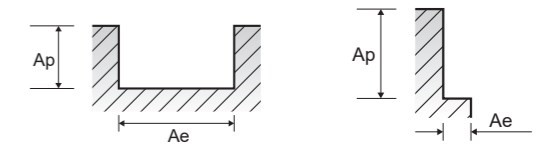


E5E39, E5E40, E5742, E5711 SERIES 3 FLUTE ROUGHING - SLOTTING

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)					
						6.0	8.0	10.0	12.0	16.0	20.0
N	21~22	Aluminum-wrought alloy	1.0D	1.5D	Vc	198	201	204	241	241	242
					fz	0.168	0.167	0.179	0.167	0.167	0.165
					RPM	10504	7998	6494	6393	4795	3852
N	23~24	Aluminum-cast, alloyed	1.0D	1.5D	Vc	129	131	133	157	157	157
					fz	0.168	0.167	0.179	0.167	0.167	0.165
					RPM	6828	5198	4221	4155	3116	2504
					FEED	3441	2604	2267	2082	1561	1239

3 FLUTE ROUGHING - SIDE CUTTING

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)					
						6.0	8.0	10.0	12.0	16.0	20.0
N	21~22	Aluminum-wrought alloy	0.5D	1.5D	Vc	254	264	267	320	322	320
					fz	0.168	0.168	0.169	0.165	0.167	0.163
					RPM	13475	10504	8499	8488	6406	5093
N	23~24	Aluminum-cast, alloyed	0.5D	1.5D	Vc	165	172	174	208	209	208
					fz	0.168	0.168	0.169	0.165	0.167	0.163
					RPM	8759	6828	5524	5517	4164	3310
					FEED	4414	3441	2801	2731	2086	1619

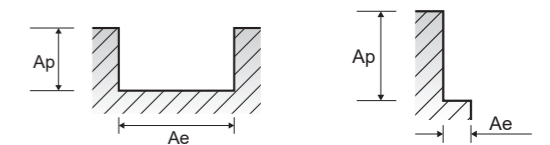


E5E48, E5522, E5521 SERIES 2 FLUTE - SLOTTING

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)													
						3.0	4.0	5.0	6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.0			
N	21~22	Aluminum-wrought alloy	1.0D	0.5D	Vc	95	125	155	190	200	250	300	265	300	225	250			
					fz	0.035	0.045	0.050	0.060	0.088	0.106	0.131	0.150	0.158	0.175	0.200			
					RPM	10080	9947	9868	10080	7958	7958	7958	6025	5968	3979	3979			
N	23~24	Aluminum-cast, alloyed	1.0D	0.5D	Vc	62	81	101	124	130	163	195	172	195	146	163			
					fz	0.035	0.045	0.050	0.060	0.088	0.106	0.131	0.150	0.158	0.175	0.200			
					RPM	6552	6466	6414	6552	5173	5173	5173	3916	3879	2586	2586			
					FEED	459	582	641	786	910	1097	1355	1175	1226	905	1035			

2 FLUTE - SIDE CUTTING

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)													
						3.0	4.0	5.0	6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.0			
N	21~22	Aluminum-wrought alloy	0.3-0.10-0.25D 0.12-0.20-0.5D	1.0D	Vc	95	125	155	190	200	250	300	265	300	225	250			
					fz	0.045	0.055	0.065	0.075	0.113	0.131	0.163	0.183	0.200	0.225	0.238			
					RPM	10080	9947	9868	10080	7958	7958	7958	6025	5968	3979	3979			
N	23~24	Aluminum-cast, alloyed	0.3-0.10-0.25D 0.12-0.20-0.5D	1.0D	Vc	62	81	101	124	130	163	195	172	195	146	163			
					fz	0.045	0.055	0.065	0.075	0.113	0.131	0.163	0.183	0.200	0.225	0.238			
					RPM	6552	6466	6414	6552	5173	5173	5173	3916	3879	2586	2586			
					FEED	590	711	834	983	1169	1355	1686	1433	1552	1164	1231			

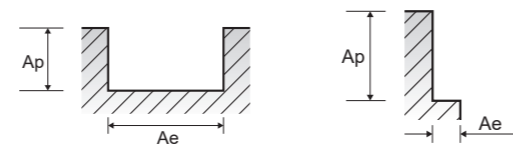



Global Cutting Tool Leader **YG-1**



MILLING