



Leading Through Innovation

CBN

CBN (Cubic Boron Nitride)

CBN FRÄSER

- CBN(Cubic Boron Nitride) Machining High Hardened Steels up to HRc70 Mirror Finish
- CBN (Kubisches Bornitrid) zur Bearbeitung von hochgehärteten Stählen bis HRc70 Hochglanzoberfläche

SELECTION GUIDE



CBN
END MILLS

Cubic Boron Nitride,
Machining High Hardened Steels
up to HRC70, Mirror Finish



◎ : Excellent ○ : Good

Recommended cutting conditions : p. C37

SERIES	ESB94	ESD02
FLUTE	2	2
HELIX ANGLE	30°	0°
CUTTING EDGE SHAPE	BALL NOSE	CORNER RADIUS
SIZE MIN	R0.2	D0.5
SIZE MAX	R1.5	D2.0
PAGE	C35	C36

Uncoated Uncoated



ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	Hrc		
P	1	Non-alloy steel	About 0.15% C Annealed	125			
	2		About 0.45% C Annealed	190	13		
	3		About 0.45% C Quenched & Tempered	250	25		
	4		About 0.75% C Annealed	270	28		
	5		About 0.75% C Quenched & Tempered	300	32		
	6	Low alloy steel	Annealed	180	10		
	7		Quenched & Tempered	275	29		
	8		Quenched & Tempered	300	32		
	9		Quenched & Tempered	350	38		
	10		High alloyed steel, and tool steel	Annealed	200	15	
	11	Quenched & Tempered		325	35		
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15		
	13		Martensitic Quenched & Tempered	240	23		
	14		Austenitic	180	10		
K	15	Grey cast iron	Pearlitic / ferritic	180	10		
	16		Pearlitic (Martensitic)	260	26		
	17	Nodular cast iron	Ferritic	160	3		
	18		Pearlitic	250	25		
	19		Ferritic	130			
	20	Malleable cast iron	Pearlitic	230	21		
N	21	Aluminum-wrought alloy	Not Curable	60			
	22		Curable Hardened	100			
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75			
	24		≤ 12% Si, Curable Hardened	90			
	25		> 12% Si, Not Curable	130			
	26		Cutting Alloys, PB>1%	110			
	27	Copper and Copper Alloys (Bronze / Brass)	CuZn, CuSnZn (Brass)	90			
	28		CuSn, lead-free copper and electrolytic copper	100			
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic				
	30		Rubber, Wood, etc.				
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15		
	32		Cured	280	30		
	33		Annealed	250	25		
	34		Cured	350	38		
	35		Cast	320	34		
	36	Titanium Alloys	Pure Titanium	400 Rm			
	37		Alpha + Beta Alloys Hardened	1050 Rm			
H	38	Hardened steel	Hardened	550	55	◎	◎
	39		Hardened	630	60	◎	◎
	40	Chilled Cast Iron	Cast	400	42		
	41	Hardened Cast Iron	Hardened	550	55	◎	◎





PLAIN SHANK **ESB94** SERIES

CBN, 2 FLUTE BALL NOSE

- CBN, 2 SCHNEIDEN STIRNRADIUS
- CBN, fraise 2 dents, hémisphérique
- CBN, 2 TAGLIENTI, SEMISFERICA

- Achieves stable machining and higher accuracy for duration.
- Saves setting time and cost from the reduction of frequent tool change.
- Improves repeatability in performance.
- Special designed geometry improving tool rigidity at High Speed Cutting.
- Tighter Radius Tolerance of ±0.005mm and higher accuracy with longer tool life.

- Sichert dauerhaft stabile Bearbeitung und höhere Genauigkeit.
- Spart Rüstzeit und -kosten durch weniger Werkzeugwechsel.
- Verbessert die Wiederholgenauigkeit.
- Eine besondere Werkzeuggeometrie verbessert die Steifigkeit bei HSC-Bearbeitung.
- Engere Radiustoleranz ±0.005, höhere Genauigkeit und längere Werkzeuglebenszeit.

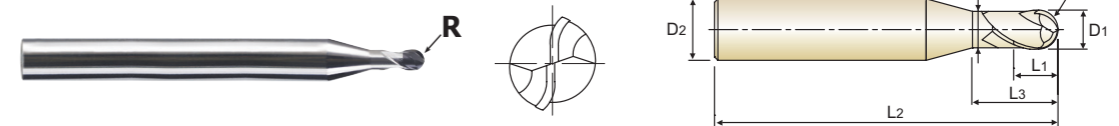

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R (±0.005)	D1	D2	L1	L3	L2	D3
ESB94004012	R0.2	0.4	4	0.3	1.2	50	0.37
ESB94005015	R0.25	0.5	4	0.4	1.5	50	0.46
ESB94006015	R0.3	0.6	4	0.5	1.5	50	0.56
ESB94008020	R0.4	0.8	4	0.6	2	50	0.76
ESB94010025	R0.5	1.0	4	0.6	2.5	50	0.95
ESB94010040	R0.5	1.0	4	0.6	4	50	0.95
ESB94010060	R0.5	1.0	4	0.6	6	50	0.95
ESB94012030	R0.6	1.2	4	0.8	3	50	1.15
ESB94015030	R0.75	1.5	4	0.95	3	50	1.45
ESB94015040	R0.75	1.5	4	0.95	4	50	1.45
ESB94015060	R0.75	1.5	4	0.95	6	50	1.45
ESB94020050	R1.0	2.0	4	1.2	5	50	1.95
ESB94020060	R1.0	2.0	4	1.2	6	50	1.95
ESB94030060	R1.5	3.0	4	1.8	6	50	2.85

Radius Tolerance(Mm)	Shank Dia. Tolerance
± 0.005	h5

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
Hrc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend																					

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
Hrc	15	30	25	38	34						200	260	250	350	320	400 Rm	1050 Rm	550	630	400	550
HB	60	100	75	90	130	110	90	100										550	630	400	550
Recommend																		◎	◎		◎





PLAIN SHANK **ESD02** SERIES

CBN, 2 FLUTE CORNER RADIUS

- CBN, 2 SCHNEIDEN ECKENRADIUS
- CBN, fraise 2 dents, torique
- CBN, 2 TAGLIENTI, TORICA

- ▶ Achieves stable machining and higher accuracy for duration.
- ▶ Saves setting time and cost from the reduction of frequent tool change.
- ▶ Improves repeatability in performance.
- ▶ Special designed geometry improving tool rigidity at High Speed Cutting.
- ▶ Tighter Radius Tolerance of ±0.005mm and higher accuracy with longer tool life.

- ▶ **Sichert dauerhaft stabile Bearbeitung und höhere Genauigkeit.**
- ▶ **Spart Rüstzeit und -kosten durch weniger Werkzeugwechsel.**
- ▶ **Verbessert die Wiederholgenauigkeit.**
- ▶ **Eine besondere Werkzeuggeometrie verbessert die Steifigkeit bei HSC-Bearbeitung.**
- ▶ **Engere Radiustoleranz ±0.005, höhere Genauigkeit und längere Werkzeuglebenszeit.**

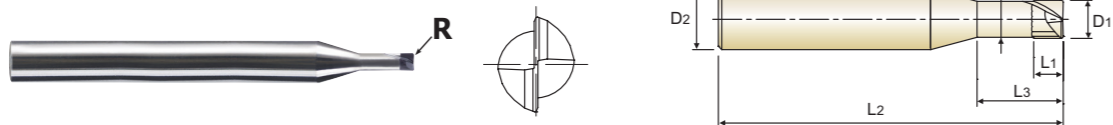

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R (±0.005)	D1	D2	L1	L3	L2	D3
ESD02005052	R0.05	0.5	4	0.3	2	50	0.46
ESD02005053	R0.05	0.5	4	0.3	3	50	0.46
ESD02010053	R0.05	1.0	4	0.7	3	50	0.95
ESD02010055	R0.05	1.0	4	0.7	5	50	0.95
ESD02010103	R0.1	1.0	4	0.7	3	50	0.95
ESD02010105	R0.1	1.0	4	0.7	5	50	0.95
ESD02015105	R0.1	1.5	4	1.0	5	50	1.45
ESD02015108	R0.1	1.5	4	1.0	8	50	1.45
ESD02015205	R0.2	1.5	4	1.0	5	50	1.45
ESD02015208	R0.2	1.5	4	1.0	8	50	1.45
ESD02020106	R0.1	2.0	4	1.2	6	50	1.95
ESD02020100	R0.1	2.0	4	1.2	10	50	1.95
ESD02020206	R0.2	2.0	4	1.2	6	50	1.95
ESD02020200	R0.2	2.0	4	1.2	10	50	1.95

Corner Radius(mm)	Shank Dia. Tolerance
± 0.005	h5

© : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc																				
HB	125	190	250	270	300	180	275	300	350	200	200	240	180	180	180	260	160	250	130	230
Recommend																				

ISO	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc																					
HB	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
Recommend																		◎	◎		◎




RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

ESB94 SERIES 2 FLUTE BALL NOSE

Vc = m/min.
fz = mm/tooth
RPM = rev/min.
FEED = mm/min
Ap = mm


ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)									
						0.4	0.5	0.6	0.8	1.0	1.2	1.5	2.0	3.0	
H	38	Hardened steel	0.5D	0.2R	Vc	65	80	95	125	155	190	235	250	250	
					fz	0.012	0.015	0.02	0.02	0.03	0.03	0.03	0.04	0.04	
	RPM		51725	50930	50399	49736	49338	50399	49869	39789	26526				
	FEED		1241	1528	2016	1989	2960	3024	2992	3183	2122				
39.1	0.5D	0.1R	Vc	65	80	95	125	155	190	235	250	250			
			fz	0.012	0.015	0.02	0.02	0.03	0.03	0.03	0.04	0.04			
392	0.5D	0.1R	Vc	65	80	95	125	155	190	235	200	205			
			fz	0.012	0.015	0.02	0.02	0.03	0.03	0.03	0.039	0.04			
393	R0.2~R0.4 = 0.005mm R0.5~R1.5 = 0.01mm	R0.2~R0.4 = 0.005mm R0.5~R1.5 = 0.01mm	Vc	65	80	95	125	155	190	235	200	205			
			fz	0.012	0.015	0.02	0.02	0.03	0.03	0.03	0.039	0.04			
41	Hardened Cast Iron	0.5D	0.2R	Vc	65	80	95	125	155	190	235	250	250		
				fz	0.012	0.015	0.02	0.02	0.03	0.03	0.03	0.04	0.04		
41	Hardened Cast Iron	0.5D	0.2R	RPM	51725	50930	50399	49736	49338	50399	49869	39789	26526		
				FEED	1241	1528	2016	1989	2960	3024	2992	3183	2122		



ESD02 SERIES 2 FLUTE CORNER RADIUS

Vc = m/min.
fz = mm/tooth
RPM = rev/min.
FEED = mm/min
Ap = mm

ISO	VDI 3323	Material Description	Parameter	Diameter (Ø)			
				0.5	1.0	1.5	2.0
H	38	Hardened steel	Vc	80	135	140	140
			fz	0.007	0.012	0.017	0.02
	RPM		50930	42972	29709	22282	
	FEED		713	1031	1010	891	
39.1	0.1	0.2	Ae	0.1	0.2	0.4	0.6
			Ap	0.01	0.01	0.02	0.03
392	0.1	0.2	Vc	80	95	90	90
			fz	0.006	0.012	0.018	0.029
393	0.1	0.2	RPM	50930	30239	19099	14324
			FEED	611	726	688	831
41	0.1	0.2	Ae	0.06	0.1	0.2	0.3
			Ap	0.005	0.01	0.02	0.03
41	Hardened Cast Iron	0.1	Vc	80	135	140	140
			fz	0.007	0.012	0.017	0.02
41	Hardened Cast Iron	0.1	RPM	50930	42972	29709	22282
			FEED	713	1031	1010	891
41	Hardened Cast Iron	0.1	Ae	0.1	0.2	0.4	0.6
			Ap	0.01	0.01	0.02	0.03





Global Cutting Tool Leader **YG-1**



MILLING