



Leading Through Innovation



**SOLID CARBIDE**

# **D-POWER GRAPHITE END MILLS**

## **D - POWER Graphit VHM - Fräser**

- For Graphite
- Für Graphite

SELECTION GUIDE



SOLID CARBIDE D-POWER for GRAPHITE END MILLS

High performance on graphite

Please visit globalyg1.com/mat for material search

◎: Excellent ○: Good


Recommended cutting conditions : p. C559

Table with columns: SERIES (EI997, EIB93, EI880), FLUTE (2), HELIX ANGLE (30°), CUTTING EDGE SHAPE (BALL NOSE), SIZE MIN (R0.1, R0.2, R1.0), SIZE MAX (R3.0, R2.0, R6.0), PAGE (C544, C546, C547), and Diamond coating (Diamond, Diamond, Diamond).



Main selection table with columns: ISO, VDI 3323, Material Description, Composition / Structure / Heat Treatment, HB, HRc, and application suitability icons (○, ◎).

Table with columns: EI451, EI450, EIB87, EI881, EI996, EIB86, EIA13, EIA14, EIB88, EIB04, and corresponding application suitability icons.

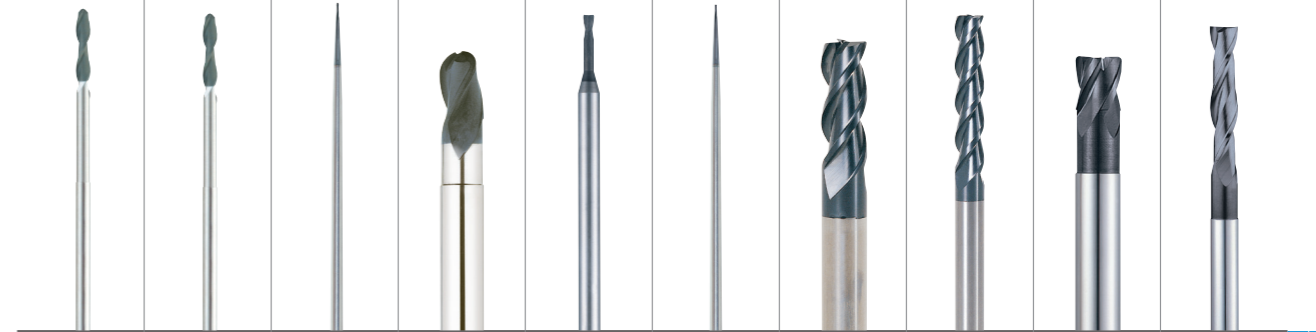


Large application suitability table with columns corresponding to the tool types in the previous table and rows for various materials and conditions.

**CARBIDE, 2 FLUTE MINIATURE BALL NOSE with NECK**

● VOLLHARTMETALL, 2 SCHNEIDEN MINI STIRNRADIUS MIT ABGESETZTEM SCHAFTTETL  
 ○ FRAISE CARBURE, 2 DENTS, HÉMISPHERIQUE, DÉTALONNÉE, MICRO-FRAISE  
 ○ 2 TAGLIENTI, SEMISFERICA, SERIE MINI, SCARICATA

- ▶ Higher hardness of film and excellent wear-resistance increase the tool life surprisingly.
- ▶ Ultra fine film of YG-1's diamond coated carbide ball end mills ensure the smooth and excellent surface on work materials.
- ▶ High performance on graphite, wrought aluminum, bakelite, plastics, wood, brass etc. YG-1's diamond coated carbide ball end mills have good result for the machining of non-ferrous metals and non-metallic materials.

- ▶ Höhere Härte der Beschichtung und ausgezeichnete Verschleißfestigkeit verlängern die Standzeit beachtlich.
- ▶ Ultrafeiner Film auf YG-1 Diamant - beschichteten Hartmetall Schafffräser gewährleisten eine glatte und ausgezeichnete Oberflächengüte.
- ▶ Hohe Leistungsfähigkeit bei Graphit, Aluminium ohne Silicon, Bakelit, Plastik, Holz, Messing, etc. YG-1 Diamant - beschichtete Hartmetall Schafffräser zeigen gute Ergebnisse beim Bearbeiten von NE - Metallen und Nichtmetall - Werkstoffen.



CARBIDE 2 30° ±0.01 PLAIN Diamond p.C559

Plain Shank  
 HYDRAULIC CHUCK SHRINK FIT HOLDER  
 POWER MILLING CHUCK  
 ER COLLET CHUCK SK SLIM CHUCK  
 Recommended ToolHolder

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R (±0.01)	D1	D2	L1	L3	L2	D3
EI997002000040	R0.1	0.2	3	0.2	-	40	-
EI997003000040	R0.15	0.3	3	0.3	-	40	-
EI997004000040	R0.2	0.4	3	0.4	-	40	-
EI997005025040	R0.25	0.5	3	0.5	2.5	40	0.45
EI997006	R0.3	0.6	3	0.6	3	40	0.55
EI997006050040	R0.3	0.6	3	0.6	5	40	0.55
EI997008	R0.4	0.8	3	0.8	4	40	0.75
EI997008070040	R0.4	0.8	3	0.8	7	40	0.75
EI997010	R0.5	1.0	3	1	5	40	0.95
EI997903	R0.5	1.0	3	1	8.5	40	0.95
EI997010120040	R0.5	1.0	3	1	12	40	0.95
EI997012	R0.6	1.2	3	1.2	6	50	1.15
EI997012100050	R0.6	1.2	3	1.2	10	50	1.15
EI997015	R0.75	1.5	3	1.5	7.5	50	1.4
EI997906	R0.75	1.5	3	1.5	12	50	1.4
EI997015180050	R0.75	1.5	3	1.5	18	50	1.4
EI997020	R1.0	2.0	3	2.2	10	60	1.9
EI997908	R1.0	2.0	3	2.2	16	60	1.9
EI997020250060	R1.0	2.0	3	2.2	25	60	1.9
EI997030100065	R1.5	3.0	4	3	10	65	2.9
EI997030150065	R1.5	3.0	4	3	15	65	2.9
EI997030200065	R1.5	3.0	4	3	20	65	2.9
EI997030250075	R1.5	3.0	4	3	25	75	2.9
EI997030300075	R1.5	3.0	4	3	30	75	2.9

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.02	h5

▶ NEXT PAGE

◎ : Excellent ○ : Good


ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	30	29	32	38	35	35	15	23	10	10	26	3	25	21	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend																					
ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○					◎											

**CARBIDE, 2 FLUTE MINIATURE BALL NOSE with NECK**

● VOLLHARTMETALL, 2 SCHNEIDEN MINI STIRNRADIUS MIT ABGESETZTEM SCHAFTTETL  
 ○ FRAISE CARBURE, 2 DENTS, HÉMISPHERIQUE, DÉTALONNÉE, MICRO-FRAISE  
 ○ 2 TAGLIENTI, SEMISFERICA, SERIE MINI, SCARICATA

- ▶ Higher hardness of film and excellent wear-resistance increase the tool life surprisingly.
- ▶ Ultra fine film of YG-1's diamond coated carbide ball end mills ensure the smooth and excellent surface on work materials.
- ▶ High performance on graphite, wrought aluminum, bakelite, plastics, wood, brass etc. YG-1's diamond coated carbide ball end mills have good result for the machining of non-ferrous metals and non-metallic materials.

- ▶ Höhere Härte der Beschichtung und ausgezeichnete Verschleißfestigkeit verlängern die Standzeit beachtlich.
- ▶ Ultrafeiner Film auf YG-1 Diamant - beschichteten Hartmetall Schafffräser gewährleisten eine glatte und ausgezeichnete Oberflächengüte.
- ▶ Hohe Leistungsfähigkeit bei Graphit, Aluminium ohne Silicon, Bakelit, Plastik, Holz, Messing, etc. YG-1 Diamant - beschichtete Hartmetall Schafffräser zeigen gute Ergebnisse beim Bearbeiten von NE - Metallen und Nichtmetall - Werkstoffen.



CARBIDE 2 30° ±0.01 PLAIN Diamond p.C559

Plain Shank  
 HYDRAULIC CHUCK SHRINK FIT HOLDER  
 POWER MILLING CHUCK  
 ER COLLET CHUCK SK SLIM CHUCK  
 Recommended ToolHolder

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R (±0.01)	D1	D2	L1	L3	L2	D3
EI997040200065	R2.0	4.0	6	4	20	65	3.9
EI997040300075	R2.0	4.0	6	4	30	75	3.9
EI997040400090	R2.0	4.0	6	4	40	90	3.9
EI997050200065	R2.5	5.0	6	5	20	65	4.9
EI997050300075	R2.5	5.0	6	5	30	75	4.9
EI997050400090	R2.5	5.0	6	5	40	90	4.9
EI997050500090	R2.5	5.0	6	5	50	90	4.9
EI997060300075	R3.0	6.0	6	6	30	75	5.9
EI997060400090	R3.0	6.0	6	6	40	90	5.9
EI997060500090	R3.0	6.0	6	6	50	90	5.9
EI997060600100	R3.0	6.0	6	6	60	100	5.9

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.02	h5

◎ : Excellent ○ : Good



ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	30	29	32	38	35	35	15	23	10	10	26	3	25	21	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend																					
ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○					◎											

**CARBIDE, 2 FLUTE MINIATURE BALL NOSE with NECK**

- VOLLHARTMETALL, 2 SCHNEIDEN MINI STIRNRADIUS MIT ABGESETZTEM SCHAFTTETL
- FRAISE CARBURE, 2 DENTS, HÉMISPHERIQUE, DÉTALONNÉE, MICRO-FRAISE
- 2 TAGLIENTI, SEMISFERICA, SERIE MINI, SCARICATA

- ▶ Higher hardness of film and excellent wear-resistance increase the tool life surprisingly.
- ▶ Ultra fine film of YG-1's diamond coated carbide ball end mills ensure the smooth and excellent surface on work materials.
- ▶ High performance on graphite, wrought aluminum, bakelite, plastics, wood, brass etc. YG-1's diamond coated carbide ball end mills have good result for the machining of non-ferrous metals and non-metallic materials.

- ▶ Höhere Härte der Beschichtung und ausgezeichnete Verschleißfestigkeit verlängern die Standzeit beachtlich.
- ▶ Ultrafeiner Film auf YG-1 Diamant - beschichteten Hartmetall Schafffräser gewährleisten eine glatte und ausgezeichnete Oberflächengüte.
- ▶ Hohe Leistungsfähigkeit bei Graphit, Aluminium ohne Silicon, Bakelit, Plastik, Holz, Messing, etc. YG-1 Diamant - beschichtete Hartmetall Schafffräser zeigen gute Ergebnisse beim Bearbeiten von NE - Metallen und Nichtmetall - Werkstoffen.

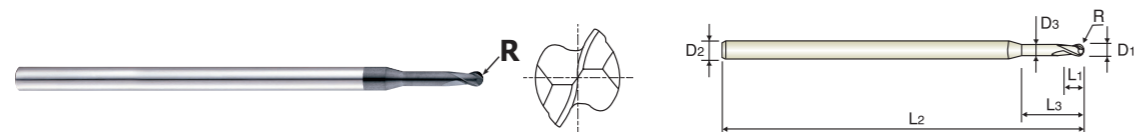

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R (±0.01)	D1	D2	L1	L3	L2	D3
EIB93004040	R0.2	0.4	4	0.6	4	45	0.36
EIB93004060	R0.2	0.4	4	0.6	6	45	0.36
EIB93006040	R0.3	0.6	4	1	4	45	0.56
EIB93006060	R0.3	0.6	4	1	6	45	0.56
EIB93006080	R0.3	0.6	4	1	8	45	0.56
EIB93010060	R0.5	1.0	4	1.5	6	45	0.95
EIB93010080	R0.5	1.0	4	1.5	8	45	0.95
EIB93010120	R0.5	1.0	4	1.5	12	45	0.95
EIB93015120	R0.75	1.5	4	1.75	12	45	1.45
EIB93020080	R1.0	2.0	4	3	8	60	1.95
EIB93020120	R1.0	2.0	4	3	12	60	1.95
EIB93020160	R1.0	2.0	4	3	16	60	1.95
EIB93040160	R2.0	4.0	4	6	16	60	3.9

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.02	h5

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron			
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend																					



ISO	N					S					H											
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron								
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend	○	○	○	○	○				◎													

**CARBIDE, 2 FLUTE BALL NOSE SHORT LENGTH with NECK**

- VOLLHARTMETALL, 2 SCHNEIDEN STIRNRADIUS KURZ MIT ABGESETZTEM SCHAFTTETL
- FRAISE CARBURE, 2 DENTS, HÉMISPHERIQUE, DÉTALONNÉE, COURTE
- 2 TAGLIENTI, SEMISFERICA, SERIE CORTA, SCARICATA

- ▶ Higher hardness of film and excellent wear-resistance increase the tool life surprisingly.
- ▶ Ultra fine film of YG-1's diamond coated carbide ball end mills ensure the smooth and excellent surface on work materials.
- ▶ High performance on graphite, wrought aluminum, bakelite, plastics, wood, brass etc. YG-1's diamond coated carbide ball end mills have good result for the machining of non-ferrous metals and non-metallic materials.

- ▶ Höhere Härte der Beschichtung und ausgezeichnete Verschleißfestigkeit verlängern die Standzeit beachtlich.
- ▶ Ultrafeiner Film auf YG-1 Diamant - beschichteten Hartmetall Schafffräser gewährleisten eine glatte und ausgezeichnete Oberflächengüte.
- ▶ Hohe Leistungsfähigkeit bei Graphit, Aluminium ohne Silicon, Bakelit, Plastik, Holz, Messing, etc. YG-1 Diamant - beschichtete Hartmetall Schafffräser zeigen gute Ergebnisse beim Bearbeiten von NE - Metallen und Nichtmetall - Werkstoffen.

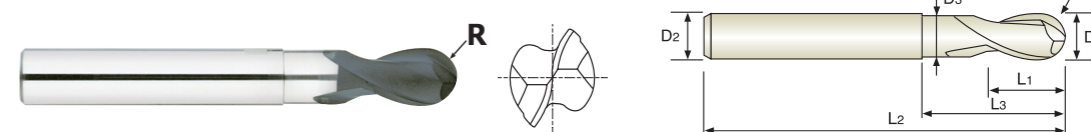

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R (±0.01)	D1	D2	L1	L3	L2	D3
EI880020	R1.0	2.0	6	3	5	60	1.9
EI880025	R1.25	2.5	6	4	6	60	2.4
EI880030	R1.5	3.0	6	4.5	6.5	60	2.8
EI880035	R1.75	3.5	6	5	7	65	3.2
EI880040	R2.0	4.0	6	6	8	65	3.7
EI880050	R2.5	5.0	6	7.5	10	65	4.6
EI880060	R3.0	6.0	6	9	12	75	5.6
EI880080	R4.0	8.0	8	12	25	75	7.4
EI880100	R5.0	10.0	10	15	30	80	9.4
EI880120	R6.0	12.0	12	18	36	90	11.4

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron			
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend																					

ISO	N					S					H											
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron								
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend	○	○	○	○	○				◎													

**CARBIDE, 2 FLUTE BALL NOSE LONG LENGTH with NECK**

- VOLLHARTMETALL, 2 SCHNEIDEN STIRNRADIUS LANG MIT ABGESETZTEM SCHAFTTETEL
- FRAISE CARBURE, 2 DENTS, HÉMISPHERIQUE, DÉTALONNÉE, LONGUE
- 2 TAGLIENTI, SEMISFERICA, SERIE LUNGA

- ▶ Higher hardness of film and excellent wear-resistance increase the tool life surprisingly.
- ▶ Ultra fine film of YG-1's diamond coated carbide ball end mills ensure the smooth and excellent surface on work materials.
- ▶ High performance on graphite, wrought aluminum, bakelite, plastics, wood, brass etc. YG-1's diamond coated carbide ball end mills have good result for the machining of non-ferrous metals and non-metallic materials.
- ▶ Höhere Härte der Beschichtung und ausgezeichnete Verschleißfestigkeit verlängern die Standzeit beachtlich.
- ▶ Ultrafeiner Film auf YG-1 Diamant - beschichteten Hartmetall Schafffräser gewährleisten eine glatte und ausgezeichnete Oberflächengüte.
- ▶ Hohe Leistungsfähigkeit bei Graphit, Aluminium ohne Silicon, Bakelit, Plastik, Holz, Messing, etc. YG-1 Diamant - beschichtete Hartmetall Schafffräser zeigen gute Ergebnisse beim Bearbeiten von NE - Metallen und Nichtmetall - Werkstoffen.



CARBIDE 2 30° R ±0.01 PLAIN Diamond p.C559

Recommended ToolHolder: Plain Shank, HYDRAULIC CHUCK SHRINK FIT HOLDER, POWER MILLING CHUCK, ER COLLET CHUCK SK SLIM CHUCK

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R (±0.01)	D1	D2	L1	L3	L2	D3
EI451020	R1.0	2.0	4	10	20	80	1.95
EI451030	R1.5	3.0	4	15	25	80	2.9
EI451040	R2.0	4.0	4	20	30	80	3.9
EI451050	R2.5	5.0	6	30	50	100	4.9
EI451060	R3.0	6.0	6	30	50	100	5.5
EI451070	R3.5	7.0	6	30	-	100	-
EI451080	R4.0	8.0	8	40	60	110	7.5
EI451090	R4.5	9.0	8	40	-	110	-
EI451100	R5.0	10.0	10	50	70	120	9.5
EI451120	R6.0	12.0	12	55	75	130	11.5

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	230	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend																					

ISO Material Description	N					S					H															
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550					
Recommend	○	○	○	○	○				◎																	

**CARBIDE, 2 FLUTE BALL NOSE LONG REACH with NECK**

- VOLLHARTMETALL, 2 SCHNEIDEN STIRNRADIUS GROSSE REICHWEITE MIT ABGESETZTEM SCHAFTTETEL
- FRAISE CARBURE, 2 DENTS, HÉMISPHERIQUE LONGUE PORTÉE, DÉTALONNÉE
- 2 TAGLIENTI, SEMISFERICA PER CAVITA' PROFONDE

- ▶ Higher hardness of film and excellent wear-resistance increase the tool life surprisingly.
- ▶ Ultra fine film of YG-1's diamond coated carbide ball end mills ensure the smooth and excellent surface on work materials.
- ▶ High performance on graphite, wrought aluminum, bakelite, plastics, wood, brass etc. YG-1's diamond coated carbide ball end mills have good result for the machining of non-ferrous metals and non-metallic materials.
- ▶ Höhere Härte der Beschichtung und ausgezeichnete Verschleißfestigkeit verlängern die Standzeit beachtlich.
- ▶ Ultrafeiner Film auf YG-1 Diamant - beschichteten Hartmetall Schafffräser gewährleisten eine glatte und ausgezeichnete Oberflächengüte.
- ▶ Hohe Leistungsfähigkeit bei Graphit, Aluminium ohne Silicon, Bakelit, Plastik, Holz, Messing, etc. YG-1 Diamant - beschichtete Hartmetall Schafffräser zeigen gute Ergebnisse beim Bearbeiten von NE - Metallen und Nichtmetall - Werkstoffen.



CARBIDE 2 30° R ±0.01 PLAIN Diamond p.C559

Recommended ToolHolder: Plain Shank, HYDRAULIC CHUCK SHRINK FIT HOLDER, POWER MILLING CHUCK, ER COLLET CHUCK SK SLIM CHUCK

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R (±0.01)	D1	D2	L1	L3	L2	D3
EI450020	R1.0	2.0	4	10	20	100	1.95
EI450030	R1.5	3.0	4	15	25	100	2.9
EI450040	R2.0	4.0	4	20	30	100	3.9
EI450050	R2.5	5.0	6	30	50	120	4.9
EI450060	R3.0	6.0	6	30	50	150	5.5
EI450070	R3.5	7.0	6	30	-	150	-
EI450080	R4.0	8.0	8	40	60	150	7.5
EI450090	R4.5	9.0	8	40	-	150	-
EI450100	R5.0	10.0	10	50	70	180	9.5
EI450120	R6.0	12.0	12	55	75	200	11.5

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K										
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron						
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20					
HRC	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	230					
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230					
Recommend																									



ISO Material Description	N					S					H															
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550					
Recommend	○	○	○	○	○				◎																	

**CARBIDE, 2 FLUTE BALL NOSE with TAPER NECK**

- VOLLHARTMETALL, 2 SCHNEIDEN STIRNRADIUS MIT KONISCH ABGESETZTEM SCHAFTTEIL
- FRAISE CARBURE, 2 DENTS, HÉMISPHERIQUE AVEC ENTRÉE CONIQUE
- 2 TAGLIENTI, SEMISFERICA CON SCARICO CONICO

- ▶ Higher hardness of film and excellent wear-resistance increase the tool life surprisingly.
- ▶ Ultra fine film of YG-1's diamond coated carbide ball end mills ensure the smooth and excellent surface on work materials.
- ▶ High performance on graphite, wrought aluminum, bakelite, plastics, wood, brass etc. YG-1's diamond coated carbide ball end mills have good result for the machining of non-ferrous metals and non-metallic materials.

- ▶ Höhere Härte der Beschichtung und ausgezeichnete Verschleißfestigkeit verlängern die Standzeit beachtlich.
- ▶ Ultrafeiner Film auf YG-1 Diamant - beschichteten Hartmetall Schafffräser gewährleisten eine glatte und ausgezeichnete Oberflächengüte.
- ▶ Hohe Leistungsfähigkeit bei Graphit, Aluminium ohne Silicon, Bakelit, Plastik, Holz, Messing, etc. YG-1 Diamant - beschichtete Hartmetall Schafffräser zeigen gute Ergebnisse beim Bearbeiten von NE - Metallen und Nichtmetall - Werkstoffen.

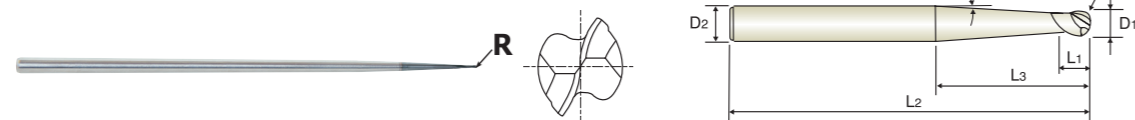

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Taper Angle
	R (±0.01)	D1	D2	L1	L3	L2	θ°
EIB87010	R0.5	1.0	3	2	-	40	8° 30'
EIB87901	R0.5	1.0	3	2	30	60	2°
EIB87902	R0.5	1.0	3	2	70	100	1°
EIB87015	R0.75	1.5	3	3	-	40	6° 15'
EIB87903	R0.75	1.5	3	3	30	60	1° 30'
EIB87904	R0.75	1.5	3	3	58	100	45°
EIB87020	R1.0	2.0	3	4	-	40	4° 15'
EIB87905	R1.0	2.0	3	4	30	60	1°
EIB87906	R1.0	2.0	4	4	70	100	1°

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.02	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend																					



ISO Material Description	N					S					H											
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	15	30	25	38	34						15	30	25	38	34			55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend	○	○	○	○	○				◎													

**CARBIDE, 3 FLUTE BALL NOSE SHORT LENGTH with NECK**

- VOLLHARTMETALL, 3 SCHNEIDEN STIRNRADIUS KURZ MIT ABGESETZTEM SCHAFTTETL
- FRAISE CARBURE, 3 DENTS, HÉMISPHERIQUE, DÉTALONNÉE, COURTE
- 3 TAGLIENTI, SEMISFERICA, SERIE CORTA

- ▶ Higher hardness of film and excellent wear-resistance increase the tool life surprisingly.
- ▶ Ultra fine film of YG-1's diamond coated carbide ball end mills ensure the smooth and excellent surface on work materials.
- ▶ High performance on graphite, wrought aluminum, bakelite, plastics, wood, brass etc. YG-1's diamond coated carbide ball end mills have good result for the machining of non-ferrous metals and non-metallic materials.

- ▶ Höhere Härte der Beschichtung und ausgezeichnete Verschleißfestigkeit verlängern die Standzeit beachtlich.
- ▶ Ultrafeiner Film auf YG-1 Diamant - beschichteten Hartmetall Schafffräser gewährleisten eine glatte und ausgezeichnete Oberflächengüte.
- ▶ Hohe Leistungsfähigkeit bei Graphit, Aluminium ohne Silicon, Bakelit, Plastik, Holz, Messing, etc. YG-1 Diamant - beschichtete Hartmetall Schafffräser zeigen gute Ergebnisse beim Bearbeiten von NE - Metallen und Nichtmetall - Werkstoffen.

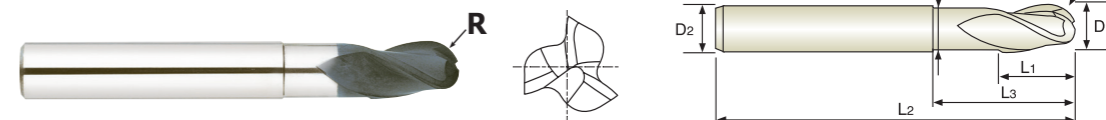

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R (±0.01)	D1	D2	L1	L3	L2	D3
EI881020	R1.0	2.0	6	3	5	60	1.9
EI881025	R1.25	2.5	6	4	6	60	2.4
EI881030	R1.5	3.0	6	4.5	6.5	60	2.8
EI881035	R1.75	3.5	6	5	7	65	3.2
EI881040	R2.0	4.0	6	6	8	65	3.7
EI881050	R2.5	5.0	6	7.5	10	65	4.6
EI881060	R3.0	6.0	6	9	12	75	5.6
EI881080	R4.0	8.0	8	12	25	75	7.4
EI881100	R5.0	10.0	10	15	30	80	9.4
EI881120	R6.0	12.0	12	18	36	90	11.4

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend																					

ISO Material Description	N					S					H											
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	15	30	25	38	34						15	30	25	38	34			55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend	○	○	○	○	○				◎													

CARBIDE, 2 FLUTE MINIATURE CORNER RADIUS with NECK

VOLLHARTMETALL, 2 SCHNEIDEN MINI ECKENRADIUS MIT ABGESETZTEM SCHAFTTETEL
FRAISE CARBURE, 2 DENTS, TORIQUE, DÉTALONNÉE, MICRO-FRAISE
2 TAGLIENTI, TORICA, SERIE MINI, SCARICATA

- Higher hardness of film and excellent wear-resistance increase the tool life surprisingly.
Ultra fine film of YG-1's diamond coated carbide end mills ensure the smooth and excellent surface on work materials.
High performance on graphite, wrought aluminum, bakelite, plastics, wood, brass etc. YG-1's diamond coated carbide end mills have good result for the machining of non-ferrous metals and non-metallic materials.



Icons for CARBIDE, 2, 30°, PLAIN, Diamond, and p.C559. Recommended Tool Holder: HYDRAULIC CHUCK SHRINK FIT HOLDER, POWER MILLING CHUCK, ER COLLET CHUCK SK SLIM CHUCK.

Unit : mm

Table with 8 columns: EDP No., Corner Radius, Mill Diameter, Shank Diameter, Length of Cut, Length Below Shank, Overall Length, Neck Diameter. Lists various EDP numbers and their specifications.

Table with 2 columns: Mill Dia. Tolerance (mm), Shank Dia. Tolerance. Values: 0 ~ - 0.02, h5.

NEXT PAGE

© : Excellent ○ : Good

ISO material compatibility chart with columns for P (Non-alloy steel, Low alloy steel, High alloyed steel, Stainless steel, Grey cast iron, Nodular cast iron, Malleable cast iron), N (Aluminum-wrought alloy, Aluminum-cast, alloyed, Copper and Copper Alloys, Non Metallic Materials), S (Heat Resistant Super Alloys, Titanium Alloys), and H (Hardened steel, Chilled Cast Iron, Hardened Cast Iron).

CARBIDE, 2 FLUTE MINIATURE CORNER RADIUS with NECK

VOLLHARTMETALL, 2 SCHNEIDEN MINI ECKENRADIUS MIT ABGESETZTEM SCHAFTTETEL
FRAISE CARBURE, 2 DENTS, TORIQUE, DÉTALONNÉE, MICRO-FRAISE
2 TAGLIENTI, TORICA, SERIE MINI, SCARICATA

- Higher hardness of film and excellent wear-resistance increase the tool life surprisingly.
Ultra fine film of YG-1's diamond coated carbide end mills ensure the smooth and excellent surface on work materials.
High performance on graphite, wrought aluminum, bakelite, plastics, wood, brass etc. YG-1's diamond coated carbide end mills have good result for the machining of non-ferrous metals and non-metallic materials.



Icons for CARBIDE, 2, 30°, PLAIN, Diamond, and p.C559. Recommended Tool Holder: HYDRAULIC CHUCK SHRINK FIT HOLDER, POWER MILLING CHUCK, ER COLLET CHUCK SK SLIM CHUCK.

Unit : mm

Table with 8 columns: EDP No., Corner Radius, Mill Diameter, Shank Diameter, Length of Cut, Length Below Shank, Overall Length, Neck Diameter. Lists various EDP numbers and their specifications.

Table with 2 columns: Mill Dia. Tolerance (mm), Shank Dia. Tolerance. Values: 0 ~ - 0.02, h5.

© : Excellent ○ : Good

ISO material compatibility chart with columns for P (Non-alloy steel, Low alloy steel, High alloyed steel, Stainless steel, Grey cast iron, Nodular cast iron, Malleable cast iron), N (Aluminum-wrought alloy, Aluminum-cast, alloyed, Copper and Copper Alloys, Non Metallic Materials), S (Heat Resistant Super Alloys, Titanium Alloys), and H (Hardened steel, Chilled Cast Iron, Hardened Cast Iron).

**CARBIDE, 2 FLUTE CORNER RADIUS with TAPER NECK**

- VOLLHARTMETALL, 2 SCHEIDEN ECKENRADIUS MIT KONISCH ABGESETZTEM SCHAFTTEIL
- FRAISE CARBURE, 2 DENTS, TORIQUE AVEC ENTRÉE CONIQUE
- 2 TAGLIENTI, TORICA CON SCARICO CONICO

- ▶ Higher hardness of film and excellent wear-resistance increase the tool life surprisingly.
- ▶ Ultra fine film of YG-1's diamond coated carbide end mills ensure the smooth and excellent surface on work materials.
- ▶ High performance on graphite, wrought aluminum, bakelite, plastics, wood, brass etc. YG-1's diamond coated carbide end mills have good result for the machining of non-ferrous metals and non-metallic materials.
- ▶ Höhere Härte der Beschichtung und ausgezeichnete Verschleißfestigkeit verlängern die Standzeit beachtlich.
- ▶ Ultrafeiner Film auf YG-1 Diamant - beschichteten Hartmetall Schafffräser gewährleisten eine glatte und ausgezeichnete Oberflächengüte.
- ▶ Hohe Leistungsfähigkeit bei Graphit, Aluminium ohne Silicon, Bakelit, Plastik, Holz, Messing, etc. YG-1 Diamant - beschichtete Hartmetall Schafffräser zeigen gute Ergebnisse beim Bearbeiten von NE - Metallen und Nichtmetall - Werkstoffen.



CARBIDE 2 30° PLAIN Diamond p.C559

Plain Shank  
 HYDRAULIC CHUCK SHRINK FIT HOLDER  
 POWER MILLING CHUCK  
 ER COLLET CHUCK SK SLIM CHUCK  
 Recommended ToolHolder

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut		Overall Length	Neck Taper Angle
	R	D1	D2	L1	L3	L2	θ°
EIB86010	R0.1	1.0	3	2	30	60	2°
EIB86901	R0.1	1.0	3	2	70	100	1°
EIB86015	R0.15	1.5	3	3	30	60	1° 30'
EIB86902	R0.15	1.5	3	3	50	100	1°
EIB86020	R0.15	2.0	3	4	30	60	1°
EIB86903	R0.15	2.0	4	4	70	100	1°

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.02	h5

◎ : Excellent ○ : Good

ISO Material Description	P									M						K					
	Non-alloy steel			Low alloy steel			High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend																					

ISO Material Description	N						S						H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc																					
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○				◎												

**CARBIDE, 3 FLUTE 40° HELIX CORNER RADIUS SHORT LENGTH**

- VOLLHARTMETALL, 3 SCHNEIDEN 40° RECHTSSPIRALE ECKENRADIUS KURZ
- FRAISE CARBURE, 3 DENTS, TORIQUE, HÉLICE 40°, COURTE
- 3 TAGLIENTI, ELICA 40°, TORICA, SERIE CORTA

- ▶ Higher hardness of film and excellent wear-resistance increase the tool life surprisingly.
- ▶ Ultra fine film of YG-1's diamond coated carbide end mills ensure the smooth and excellent surface on work materials.
- ▶ High performance on graphite, wrought aluminum, bakelite, plastics, wood, brass etc. YG-1's diamond coated carbide end mills have good result for the machining of non-ferrous metals and non-metallic materials.
- ▶ Höhere Härte der Beschichtung und ausgezeichnete Verschleißfestigkeit verlängern die Standzeit beachtlich.
- ▶ Ultrafeiner Film auf YG-1 Diamant - beschichteten Hartmetall Schafffräser gewährleisten eine glatte und ausgezeichnete Oberflächengüte.
- ▶ Hohe Leistungsfähigkeit bei Graphit, Aluminium ohne Silicon, Bakelit, Plastik, Holz, Messing, etc. YG-1 Diamant - beschichtete Hartmetall Schafffräser zeigen gute Ergebnisse beim Bearbeiten von NE - Metallen und Nichtmetall - Werkstoffen.



CARBIDE 3 40° PLAIN Diamond p.C560

Plain Shank  
 HYDRAULIC CHUCK SHRINK FIT HOLDER  
 POWER MILLING CHUCK  
 ER COLLET CHUCK SK SLIM CHUCK  
 Recommended ToolHolder

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	R	D1	D2	L1	L2
EIA13020	R0.15	2.0	3	6	40
EIA13030	R0.15	3.0	3	12	40
EIA13040	R0.2	4.0	4	14	50
EIA13050	R0.3	5.0	5	16	50
EIA13060	R0.3	6.0	6	20	65
EIA13080	R0.5	8.0	8	20	65
EIA13100	R0.5	10.0	10	25	75
EIA13120	R0.5	12.0	12	25	75

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P									M						K					
	Non-alloy steel			Low alloy steel			High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend																					

ISO Material Description	N						S						H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc																					
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○				◎												



**CARBIDE, 3 FLUTE 40° HELIX CORNER RADIUS LONG LENGTH**

- VOLLHARTMETALL, 3 SCHNEIDN 40° RECHTSSPIRALE ECKENRADIUS LANG
- FRAISE CARBURE, 3 DENTS, TORIQUE, HÉLICE 40°, LONGUE
- 3 TAGLIENTI, ELICA 40°, TORICA, SERIE LUNGA

- ▶ Higher hardness of film and excellent wear-resistance increase the tool life surprisingly.
  - ▶ Ultra fine film of YG-1's diamond coated carbide end mills ensure the smooth and excellent surface on work materials.
  - ▶ High performance on graphite, wrought aluminum, bakelite, plastics, wood, brass etc. YG-1's diamond coated carbide end mills have good result for the machining of non-ferrous metals and non-metallic materials.
- ▶ Höhere Härte der Beschichtung und ausgezeichnete Verschleißfestigkeit verlängern die Standzeit beachtlich.
  - ▶ Ultrafeiner Film auf YG-1 Diamant - beschichteten Hartmetall Schafffräser gewährleisten eine glatte und ausgezeichnete Oberflächengüte.
  - ▶ Hohe Leistungsfähigkeit bei Graphit, Aluminium ohne Silicon, Bakelit, Plastik, Holz, Messing, etc. YG-1 Diamant - beschichtete Hartmetall Schafffräser zeigen gute Ergebnisse beim Bearbeiten von NE - Metallen und Nichtmetall - Werkstoffen.



CARBIDE 3 40° PLAIN Diamond p.C560

Recommended ToolHolder: Plain Shank, HYDRAULIC CHUCK SHRINK FIT HOLDER, POWER MILLING CHUCK, ER COLLET CHUCK SK SLIM CHUCK

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	R	D1	D2	L1	L2
EIA14020	R0.15	2.0	3	9	60
EIA14030	R0.15	3.0	3	30	60
EIA14040	R0.2	4.0	4	30	60
EIA14050	R0.3	5.0	5	35	70
EIA14060	R0.3	6.0	6	40	100
EIA14080	R0.5	8.0	8	40	100
EIA14100	R0.5	10.0	10	40	100
EIA14120	R0.5	12.0	12	45	100

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P									M				K						
	Non-alloy steel			Low alloy steel			High alloyed steel, and tool steel			Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron					
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend																				

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○				◎												

**CARBIDE, 4 FLUTE CORNER RADIUS with NECK**

- VOLLHARTMETALL, 4 SCHNEIDEN ECKENRADIUS MIT ABGESETZTEM SCHAFTTETEL
- FRAISE CARBURE, 4 DENTS, TORIQUE, DÉTALONNÉE
- 4 TAGLIENTI, TORICA, SCARICATA

- ▶ Higher hardness of film and excellent wear-resistance increase the tool life surprisingly.
  - ▶ Ultra fine film of YG-1's diamond coated carbide end mills ensure the smooth and excellent surface on work materials.
  - ▶ High performance on graphite, wrought aluminum, bakelite, plastics, wood, brass etc. YG-1's diamond coated carbide end mills have good result for the machining of non-ferrous metals and non-metallic materials.
- ▶ Höhere Härte der Beschichtung und ausgezeichnete Verschleißfestigkeit verlängern die Standzeit beachtlich.
  - ▶ Ultrafeiner Film auf YG-1 Diamant - beschichteten Hartmetall Schafffräser gewährleisten eine glatte und ausgezeichnete Oberflächengüte.
  - ▶ Hohe Leistungsfähigkeit bei Graphit, Aluminium ohne Silicon, Bakelit, Plastik, Holz, Messing, etc. YG-1 Diamant - beschichtete Hartmetall Schafffräser zeigen gute Ergebnisse beim Bearbeiten von NE - Metallen und Nichtmetall - Werkstoffen.



CARBIDE 4 30° PLAIN Diamond p.C560

Recommended ToolHolder: Plain Shank, HYDRAULIC CHUCK SHRINK FIT HOLDER, POWER MILLING CHUCK, ER COLLET CHUCK SK SLIM CHUCK

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R	D1	D2	L1	L3	L2	D3
EIB88060	R0.5	6.0	6	10	40	80	5.9
EIB88080	R0.5	8.0	8	10	40	80	7.8
EIB88901	R1.0	8.0	8	10	60	100	7.8
EIB88100	R0.5	10.0	10	25	-	75	-
EIB88902	R0.5	10.0	10	12	40	80	9.8
EIB88903	R1.0	10.0	10	12	40	80	9.8
EIB88904	R0.5	10.0	10	12	80	125	9.8
EIB88120	R0.5	12.0	12	25	-	80	-
EIB88905	R0.5	12.0	12	15	40	80	11.8
EIB88906	R1.0	12.0	12	15	40	80	11.8
EIB88907	R1.0	12.0	12	15	80	125	11.8

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P									M				K						
	Non-alloy steel			Low alloy steel			High alloyed steel, and tool steel			Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron					
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend																				


ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○				◎												



**EIA13, EIA14 SERIES** 3 FLUTE CORNER RADIUS - SIDE CUTTING


Vc = m/min.  
fz = mm/tooth  
RPM = rev/min.  
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)							
						2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0
<b>N</b>	29.2	Graphite	0.3D	0.3D	Vc	250	375	505	630	755	805	815	790
					fz	0.025	0.035	0.05	0.06	0.07	0.088	0.11	0.13
					RPM	39789	39789	40187	40107	40054	32030	25942	20955
					FEED	2984	4178	6028	7219	8411	8456	8561	8173



**EIB88 SERIES** 4 FLUTE CORNER RADIUS - SIDE CUTTING

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)			
						6.0	8.0	10.0	12.0
<b>N</b>	29.2	Graphite	0.3D	0.3D	Vc	755	805	815	790
					fz	0.035	0.044	0.055	0.065
					RPM	40054	32030	25942	20955
					FEED	5608	5637	5707	5448



**EIB04 SERIES** 2 FLUTE - SIDE CUTTING

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)												
						0.4	0.6	0.8	1.0	1.5	2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0
<b>N</b>	29.2	Graphite	0.1D	1.5D	Vc	50	75	100	125	190	155	190	225	220	205	200	205	205
					fz	0.003	0.004	0.007	0.009	0.010	0.016	0.020	0.026	0.043	0.064	0.081	0.092	0.109
					RPM	39789	39789	39789	39789	40319	24669	20160	17905	14006	10876	7958	6525	5438
					FEED	239	318	557	716	806	789	806	931	1204	1392	1289	1201	1185

