



Leading Through Innovation



**HSS**

# **GENERAL HSS END MILLS HSS SCHAFTFRÄSER**

- General Purpose / Coating Available
- Allgemeine Anwendung / Beschichtung verfügbar

SELECTION GUIDE



MILLING TOOLS


SERIES	E2535 EQ535	E2492 EQ492	EL612	E2570 EQ570
FLUTE	2	2	1	2
HELIX ANGLE	30°	30°	≈ 30°	≈ 30°
CUTTING EDGE SHAPE	BALL NOSE	BALL NOSE	SQUARE	SQUARE
SIZE MIN	R1.0	R1.0	D3.0	D1.0
SIZE MAX	R16.0	R15.0	D10.0	D40.0
PAGE	C709	C710	C711	C712

HSS

# GENERAL HSS END MILLS

General Purpose, Non-coated, Any Coating Available

SHORT LENGTH	LONG LENGTH	-	SHORT LENGTH
Uncoated / TiAlN	Uncoated / TiAlN	Uncoated	Uncoated / TiAlN
HSS Co8	HSS Co8	HSS-E	HSS Co8

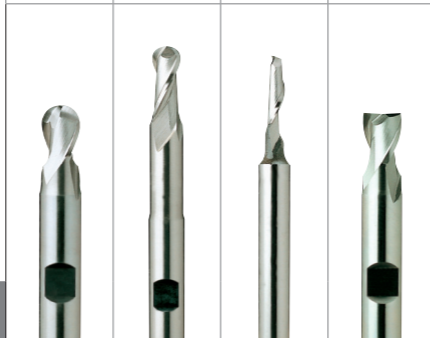

Please visit [globalyg1.com/mat](http://globalyg1.com/mat) for material search


◎ : Excellent ○ : Good

Recommended cutting conditions : p.C739

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc					
P	1	Non-alloy steel	About 0.15% C Annealed	125		◎	◎	○	◎	
	2		About 0.45% C Annealed	190	13	◎	◎	○	◎	
	3		About 0.45% C Quenched & Tempered	250	25	◎	◎		◎	
	4		About 0.75% C Annealed	270	28	◎	◎		◎	
	5		About 0.75% C Quenched & Tempered	300	32	○	○		○	
	6	Low alloy steel	Annealed	180	10	◎	◎	○	◎	
	7		Quenched & Tempered	275	29	◎	◎		◎	
	8		Quenched & Tempered	300	32	○	○		○	
	9		Quenched & Tempered	350	38	○	○		○	
	10		High alloyed steel, and tool steel	Annealed	200	15	◎	◎	○	◎
	11			Quenched & Tempered	325	35	○	○		○
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15					
	13		Martensitic Quenched & Tempered	240	23					
	14		Austenitic	180	10					
K	15	Grey cast iron	Pearlitic / ferritic	180	10					
	16		Pearlitic (Martensitic)	260	26					
	17	Nodular cast iron	Ferritic	160	3					
	18		Pearlitic	250	25					
	19		Ferritic	130						
20	Malleable cast iron	Pearlitic	230	21						
N	21	Aluminum-wrought alloy	Not Curable	60		○	○	◎	○	
	22		Curable Hardened	100		○	○	◎	○	
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75		○	○	◎	○	
	24		≤ 12% Si, Curable Hardened	90		○	○	◎	○	
	25		> 12% Si, Not Curable	130		○	○	○	○	
	26		Cutting Alloys, PB>1%	110						
	27	Copper and Copper Alloys (Bronze / Brass)	CuZn, CuSnZn (Brass)	90						
	28		CuSn, lead-free copper and electrolytic copper	100						
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic							
	30		Rubber, Wood, etc.							
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15					
	32		Cured	280	30					
	33		Annealed	250	25					
	34		Ni or Co Based Cured	350	38					
	35	Cast	320	34						
	36	Titanium Alloys	Pure Titanium	400 Rm						
	37		Alpha + Beta Alloys Hardened	1050 Rm						
H	38	Hardened steel	Hardened	550	55					
	39		Hardened	630	60					
	40	Hardened Cast Iron	Cast	400	42					
	41		Hardened	550	55					

E2571 EQ571	E2510 EQ510	E2464	E2509	E2572 EQ572	E2573 EQ573	E2516 EQ516	E2553 EQ553	E2SET553	E2554 EQ554	E2574 EQ574	E2595 EQ595
2	2	2	2	3	3	3	3	3	3	4	4
≈ 30°	30°	42°	42°	≈ 30°	≈ 30°	30°	30°	30°	30°	≈ 30°	≈ 30°
SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE
D1.5	D2.5	D1.0	D2.0	D1.5	D1.0	D2.0	D1.0	D2.0	D1.5	D2.0	D2.0
D40.0	D40.0	D32.0	D20.0	D32.0	D40.0	D40.0	D20.0	D10.0	D10.0	D20.0	D25.0
C715	C717	C718	C720	C721	C722	C724	C726	C727	C728	C729	C730

LONG LENGTH	EXTRA LONG LENGTH	SHORT LENGTH	LONG LENGTH	STUB LENGTH	SHORT LENGTH	LONG LENGTH	SHORT LENGTH THROW AWAY	THROW AWAY SET	LONG LENGTH THROW AWAY	SHORT LENGTH	SHORT LENGTH CENTER CUT
Uncoated / TiAlN	Uncoated / TiAlN	Uncoated	Uncoated	Uncoated / TiAlN	Uncoated / TiAlN	Uncoated / TiAlN	Uncoated / TiAlN	Uncoated	Uncoated / TiAlN	Uncoated / TiAlN	Uncoated / TiAlN
HSS Co8	HSS Co8	HSS Co8	HSS Co8	HSS Co8	HSS Co8	HSS Co8	HSS Co8	HSS Co8	HSS Co8	HSS Co8	HSS Co8

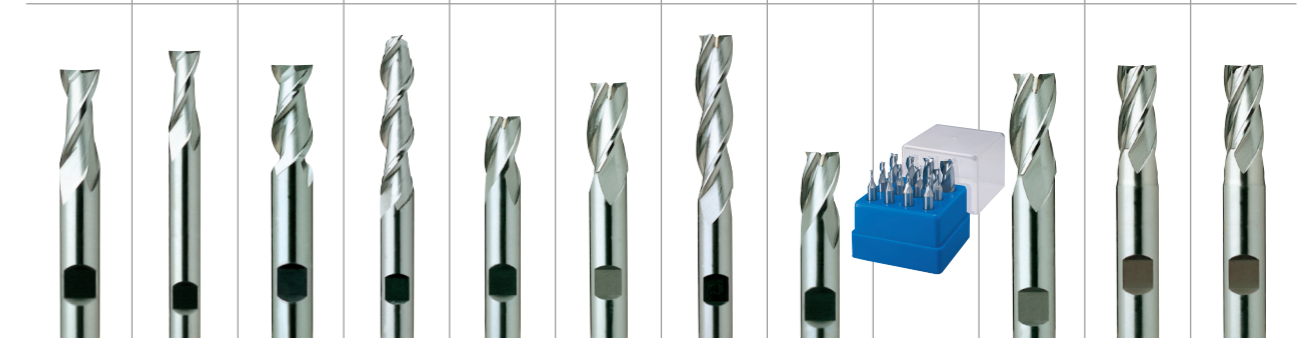

◎	◎	○	○	◎	◎	◎	◎	◎	◎	◎	◎	1
◎	◎	○	○	◎	◎	◎	◎	◎	◎	◎	◎	2
◎	◎			◎	◎	◎	◎	◎	◎	◎	◎	3
◎	◎			◎	◎	◎	◎	◎	◎	◎	◎	4
○	○			◎	◎	◎	◎	◎	◎	◎	◎	5
◎	◎	○	○	◎	◎	◎	◎	◎	◎	◎	◎	6 P
◎	◎			◎	◎	◎	◎	◎	◎	◎	◎	7
○	○			◎	◎	◎	◎	◎	◎	◎	◎	8
○	○			○	○	○	○	○	○	○	○	9
◎	◎	○	○	◎	◎	◎	◎	◎	◎	◎	◎	10
○	○			○	○	○	○	○	○	○	○	11
												12
												13 M
												14
												15
												16
												17 K
												18
												19
												20
○	○	◎	◎	○	○	○	○	○	○	○	○	21
○	○	◎	◎	○	○	○	○	○	○	○	○	22
○	○	◎	◎	○	○	○	○	○	○	○	○	23
○	○	◎	◎	○	○	○	○	○	○	○	○	24
○	○	○	○	○	○	○	○	○	○	○	○	25 N
												26
												27
												28
												29
												30
												31
												32
												33
												34 S
												35
												36
												37
												38
												39
												40
												41

SELECTION GUIDE



MILLING TOOLS

SERIES	E2597 EQ597	E2753 EQ753	E2762 EQ762	E2755	E2751 EQ751	E2752 EQ752
FLUTE	4	Multi Flute	Multi Flute	3	Multi Flute	Multi Flute
HELIX ANGLE	≈ 30°	30°	30°	37°	30°	30°
	SQUARE	ROUGHING	ROUGHING	ROUGHING	ROUGHING	ROUGHING
SIZE MIN	D2.0	D6.0	D6.0	D6.0	D6.0	D6.0
SIZE MAX	D20.0	D40.0	D40.0	D30.0	D50.0	D40.0
PAGE	C731	C732	C733	C734	C735	C737

**HSS GENERAL HSS END MILLS**

General Purpose, Non-coated, Any Coating Available

◎ : Excellent ○ : Good

Recommended cutting conditions : p.C739

Please visit [globalyg1.com/mat](http://globalyg1.com/mat) for material search



ISO	VDI 3323	Material Description	HB	HRc	E2597 EQ597	E2753 EQ753	E2762 EQ762	E2755	E2751 EQ751	E2752 EQ752
P	1	Non-alloy steel	125		◎	◎	◎	◎	◎	◎
	2		190	13	◎	◎	◎	◎	◎	◎
	3		250	25	◎	◎	◎	○	◎	◎
	4		270	28	◎	◎	◎	○	◎	◎
	5		300	32	◎	◎	◎	○	◎	◎
	6	180	10	◎	◎	◎	◎	◎	◎	
	7	Low alloy steel	275	29	◎	◎	◎	○	◎	◎
	8		300	32	◎	◎	◎	○	◎	◎
	9		350	38	○	○	○	○	○	○
	10		High alloyed steel, and tool steel	200	15	◎	◎	◎	◎	◎
	11	325		35	○	○	○	○	○	○
M	12	Stainless steel	200	15						
	13		240	23						
	14		180	10						
K	15	Grey cast iron	180	10						
	16		260	26						
	17	Nodular cast iron	160	3						
	18		250	25						
	19	Malleable cast iron	130							
	20		230	21						
N	21	Aluminum-wrought alloy	60		○	○	○	◎	○	○
	22		100		○	○	○	◎	○	○
	23	Aluminum-cast, alloyed	75		○	○	○	◎	○	○
	24		90		○	○	○	◎	○	○
	25		130		○	○	○	○	○	○
	26		110							
	27	Copper and Copper Alloys (Bronze / Brass)	90							
	28		100							
	29	Non Metallic Materials								
	30									
S	31	Heat Resistant Super Alloys	200	15						
	32		280	30						
	33		250	25						
	34		350	38						
	35		320	34						
	36	Titanium Alloys	400 Rm							
	37		1050 Rm							
H	38	Hardened steel	550	55						
	39		630	60						
	40	Hardened Cast Iron	400	42						
	41		550	55						



FLAT SHANK E2535 SERIES

FLAT SHANK EQ535 SERIES

HSS Co8, 2 FLUTE SHORT LENGTH BALL NOSE

- HSS Co8, 2 SCHNEIDEN KURZ STIRNRADIUS
- FRAISE HSS Co8, 2 DENTS, HÉMISPHERIQUE, COURTE
- 2 TAGLIENTI, SEMISFERICA, SERIE CORTA - HSS Co8



p.C739~C740

Recommended ToolHolder	Flat Shank	Plain Shank
◎	END MILL HOLDER	POWERMILLING CHUCK
○		ER COLLET CHUCK
		SK SLIM CHUCK

Unit : mm

EDP No.	Radius of Ball Nose		Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	UNCOATED	TiAIN				
E2535020	EQ535020	R1.0	2.0	6	4	48
E2535025	EQ535025	R1.25	2.5	6	5	49
E2535030	EQ535030	R1.5	3.0	6	5	49
E2535035	EQ535035	R1.75	3.5	6	6	50
E2535040	EQ535040	R2.0	4.0	6	7	51
E2535045	EQ535045	R2.25	4.5	6	7	51
E2535050	EQ535050	R2.5	5.0	6	8	52
E2535055	EQ535055	R2.75	5.5	6	8	52
E2535060	EQ535060	R3.0	6.0	6	8	52
E2535070	EQ535070	R3.5	7.0	10	10	60
E2535080	EQ535080	R4.0	8.0	10	11	61
E2535090	EQ535090	R4.5	9.0	10	11	61
E2535100	EQ535100	R5.0	10.0	10	13	63
E2535110	EQ535110	R5.5	11.0	12	13	70
E2535120	EQ535120	R6.0	12.0	12	16	73
E2535130	EQ535130	R6.5	13.0	12	16	73
E2535140	EQ535140	R7.0	14.0	12	16	73
E2535150	EQ535150	R7.5	15.0	12	16	73
E2535160	EQ535160	R8.0	16.0	16	19	79
E2535170	EQ535170	R8.5	17.0	16	19	79
E2535180	EQ535180	R9.0	18.0	16	19	79
E2535190	EQ535190	R9.5	19.0	16	19	79
E2535200	EQ535200	R10.0	20.0	16	22	82
E2535210	EQ535210	R10.0	20.0	20	22	88
E2535220	EQ535220	R11.0	22.0	20	22	88
E2535222	EQ535222	R11.0	22.0	25	22	98
E2535240	EQ535240	R12.0	24.0	25	26	102
E2535250	EQ535250	R12.5	25.0	25	26	102
E2535260	EQ535260	R13.0	26.0	25	26	102
E2535280	EQ535280	R14.0	28.0	25	26	102
E2535300	EQ535300	R15.0	30.0	25	26	102
E2535320	EQ535320	R16.0	32.0	32	32	112

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ -0.03	h6

- ▶ Other shank design on your request.
- ▶ TiN and TiCN Coatings are available on your request.

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	18	29	32	38	15	35	15	23	10	26	3	25	21			
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	○	◎	◎	○	◎	○	○	◎	○	◎	○	◎	○	

ISO	N					S					H											
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron					
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	15	30	25	38	34	15	30	25	38	34	15	30	25	38	34	55	60	42	55			
HB	60	100	75	90	130	110	90	100			200	260	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

**YG GENERAL HSS END MILLS**

FLAT SHANK **E2492** SERIES  
 FLAT SHANK **EQ492** SERIES

**HSS Co8, 2 FLUTE LONG LENGTH BALL NOSE**

● **HSS Co8, 2 SCHNEIDEN LANG STIRNRADIUS**  
 ○ **FRAISE HSS Co8, 2 DENTS, HÉMISPHERIQUE, LONGUE**  
 ○ **2 TAGLIENTI, SEMISFERICA, SERIE LUNGA - HSS Co8**



HSS Co8, DIN 1889, 2 flutes, 30° angle, R ball nose, ±0.02 tolerance, UNCOATED, TiAlN coating, DIN 1835B.

Recommended ToolHolder	Flat Shank	Plain Shank
	END MILL HOLDER	POWER MILLING CHUCK
		ER COLLET CHUCK SK SLIM CHUCK

p.C739~C740

Unit : mm

EDP No.	Radius of Ball Nose R (±0.02)	Mill Diameter	Shank Diameter h6	Length of Cut	Overall Length	
						UNCOATED
E2492020	EQ492020	R1.0	2.0	6	7	54
E2492030	EQ492030	R1.5	3.0	6	8	56
E2492040	EQ492040	R2.0	4.0	6	11	63
E2492050	EQ492050	R2.5	5.0	6	13	68
E2492060	EQ492060	R3.0	6.0	6	13	68
E2492070	EQ492070	R3.5	7.0	10	16	80
E2492080	EQ492080	R4.0	8.0	10	19	88
E2492090	EQ492090	R4.5	9.0	10	19	88
E2492100	EQ492100	R5.0	10.0	10	22	95
E2492110	EQ492110	R5.5	11.0	12	22	102
E2492120	EQ492120	R6.0	12.0	12	26	110
E2492130	EQ492130	R6.5	13.0	12	26	110
E2492140	EQ492140	R7.0	14.0	12	26	110
E2492150	EQ492150	R7.5	15.0	12	26	110
E2492160	EQ492160	R8.0	16.0	16	32	123
E2492170	EQ492170	R8.5	17.0	16	32	123
E2492180	EQ492180	R9.0	18.0	16	32	123
E2492190	EQ492190	R9.5	19.0	16	32	123
E2492200	EQ492200	R10.0	20.0	20	38	141
E2492220	EQ492220	R11.0	22.0	20	38	141
E2492240	EQ492240	R12.0	24.0	25	45	166
E2492250	EQ492250	R12.5	25.0	25	45	166
E2492260	EQ492260	R13.0	26.0	25	45	166
E2492280	EQ492280	R14.0	28.0	25	45	166
E2492300	EQ492300	R15.0	30.0	25	45	166

- ▶ Other shank design on your request.
- ▶ TiN and TiCN Coatings are available on your request.

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h6

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	29	32	38	35	35	15	23	10	10	3	25	3	25	3	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	○	○

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

**YG GENERAL HSS END MILLS**

PLAIN SHANK **EL612** SERIES

**HSS-E, 1 FLUTE for ALUMINUM**

● **HSS-E, 1 SCHNEIDEN FÜR ALUMINIUM**  
 ○ **FRAISE HSS-E, 1 DENT POUR ALUMINIUM**  
 ○ **1 TAGLIENTE - HSS-E**

for ALUMINUM für ALUMINIUM




HSS-E, YG STD, 1 flute, 30° angle, UNCOATED, DIN 1835A.

Recommended ToolHolder	Flat Shank	Plain Shank
	END MILL HOLDER	POWER MILLING CHUCK
		ER COLLET CHUCK SK SLIM CHUCK

p.C741

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
UNCOATED	js14	h6		
EL612030	3.0	8	12	60
EL612040	4.0	8	12	60
EL612050	5.0	8	12	60
EL612060	6.0	8	14	60
EL612070	7.0	8	14	60
EL612080	8.0	8	14	80
EL612090	9.0	8	14	80
EL612100	10.0	8	14	80

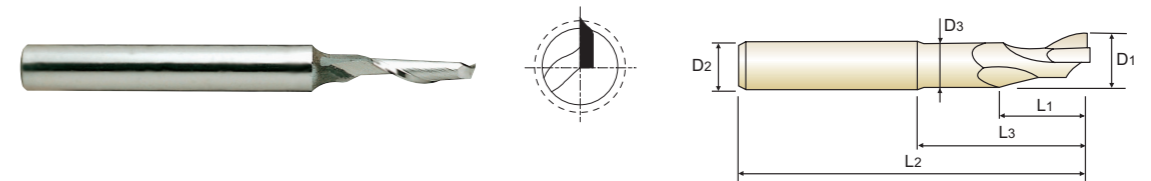

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
UNCOATED	D1(js14)	D2(h6)	L1	L3	L2	L2
EL612904	5.0	8	18	35	80	4.8
EL612909	5.0	8	40	-	100	-
EL612932	8.0	8	14	68	120	7.5

**Tolerances according to DIN 7160 & 7161**

	Tolerance range in μm					
	Nominal-Diameter in mm					
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50
js14	±125	±150	±180	±215	±260	±310
h6	0 -6	0 -8	0 -9	0 -11	0 -13	0 -16

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	29	32	38	35	35	15	23	10	10	3	25	3	25	3	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	○	○

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎



FLAT SHANK **E2570** SERIES  
FLAT SHANK **EQ570** SERIES

**HSS Co8, 2 FLUTE SHORT LENGTH**

- HSS Co8, 2 SCHNEIDEN KURZ
- FRAISE HSS Co8, 2 DENTS, COURTE
- 2 TAGLIENTI, SERIE CORTA - HSS Co8



HSS Co8 DIN 327 2  $\approx 30^\circ$   
DIN 1835B UNCOATED TiAlN p.C742~C745

Recommended ToolHolder	Flat Shank		Plain Shank	
	END MILL HOLDER	ER COLLET CHUCK	POWER MILLING CHUCK	SK SLIM CHUCK
○	○	○	○	○
○	○	○	○	○

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	
					UNCOATED
E2570010	EQ570010	1.0	6	2.5	47
E2570015	EQ570015	1.5	6	3	47
E2570020	EQ570020	2.0	6	4	48
E2570025	EQ570025	2.5	6	5	49
E2570028	EQ570028	2.8	6	5	49
E2570030	EQ570030	3.0	6	5	49
E2570035	EQ570035	3.5	6	6	50
E2570038	EQ570038	3.8	6	7	51
E2570040	EQ570040	4.0	6	7	51
E2570045	EQ570045	4.5	6	7	51
E2570048	EQ570048	4.8	6	8	52
E2570050	EQ570050	5.0	6	8	52
E2570055	EQ570055	5.5	6	8	52
E2570957	EQ570957	5.8	6	8	52
E2570060	EQ570060	6.0	6	8	52
E2570065	EQ570065	6.5	10	10	60
E2570967	EQ570967	6.8	10	10	60
E2570070	EQ570070	7.0	10	10	60
E2570075	EQ570075	7.5	10	10	60
E2570977	EQ570977	7.8	10	11	61
E2570080	EQ570080	8.0	10	11	61
E2570085	EQ570085	8.5	10	11	61
E2570087	EQ570087	8.7	10	11	61
E2570090	EQ570090	9.0	10	11	61

**Tolerances according to DIN 7160 & 7161**

	Tolerance range in $\mu\text{m}$					
	Nominal-Diameter in mm					
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50
e8	-14	-20	-25	-32	-40	-50
	-28	-38	-47	-59	-73	-89
h6	0	0	0	0	0	0
	-6	-8	-9	-11	-13	-16

- ▶ Other shank design on your request. ▶ NEXT PAGE
- ▶ TiN and TiCN Coatings are available on your request.

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	35	38	40	42	45	48	50	52	55	58	60	62	65	68	70	72
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S				H						
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron		
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎



FLAT SHANK **E2570** SERIES  
FLAT SHANK **EQ570** SERIES

**HSS Co8, 2 FLUTE SHORT LENGTH**

- HSS Co8, 2 SCHNEIDEN KURZ
- FRAISE HSS Co8, 2 DENTS, COURTE
- 2 TAGLIENTI, SERIE CORTA - HSS Co8



HSS Co8 DIN 327 2  $\approx 30^\circ$   
DIN 1835B UNCOATED TiAlN p.C742~C745

Recommended ToolHolder	Flat Shank		Plain Shank	
	END MILL HOLDER	ER COLLET CHUCK	POWER MILLING CHUCK	SK SLIM CHUCK
○	○	○	○	○
○	○	○	○	○

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	
					UNCOATED
E2570095	EQ570095	9.5	10	11	61
E2570097	EQ570097	9.7	10	13	63
E2570100	EQ570100	10.0	10	13	63
E2570105	EQ570105	10.5	12	13	70
E2570107	EQ570107	10.7	12	13	70
E2570110	EQ570110	11.0	12	13	70
E2570115	EQ570115	11.5	12	13	70
E2570117	EQ570117	11.7	12	16	73
E2570120	EQ570120	12.0	12	16	73
E2570125	EQ570125	12.5	12	16	73
E2570127	EQ570127	12.7	12	16	73
E2570130	EQ570130	13.0	12	16	73
E2570135	EQ570135	13.5	12	16	73
E2570137	EQ570137	13.7	12	16	73
E2570140	EQ570140	14.0	12	16	73
E2570147	EQ570147	14.7	12	16	73
E2570150	EQ570150	15.0	12	16	73
E2570157	EQ570157	15.7	16	19	79
E2570160	EQ570160	16.0	16	19	79
E2570167	EQ570167	16.7	16	19	79
E2570170	EQ570170	17.0	16	19	79
E2570177	EQ570177	17.7	16	19	79
E2570180	EQ570180	18.0	16	19	79
E2570190	EQ570190	19.0	16	19	79

**Tolerances according to DIN 7160 & 7161**

	Tolerance range in $\mu\text{m}$					
	Nominal-Diameter in mm					
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50
e8	-14	-20	-25	-32	-40	-50
	-28	-38	-47	-59	-73	-89
h6	0	0	0	0	0	0
	-6	-8	-9	-11	-13	-16

- ▶ Other shank design on your request. ▶ NEXT PAGE
- ▶ TiN and TiCN Coatings are available on your request.

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	35	38	40	42	45	48	50	52	55	58	60	62	65	68	70	72
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S				H						
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron		
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎



FLAT SHANK **E2570** SERIES  
FLAT SHANK **EQ570** SERIES

**HSS Co8, 2 FLUTE SHORT LENGTH**

● HSS Co8, 2 SCHNEIDEN KURZ  
○ FRAISE HSS Co8, 2 DENTS, COURTE  
○ 2 TAGLIENTI, SERIE CORTA - HSS Co8



p.C742~C745

Recommended ToolHolder	Flat Shank		Plain Shank	
	END MILL HOLDER	POWER MILLING CHUCK	ER COLLET CHUCK	SK SLIM CHUCK
◎	◎	◎	◎	◎
○	○	○	○	○

Unit : mm

EDP No.	Mill Diameter		Shank Diameter	Length of Cut	Overall Length
	UNCOATED	TiAlN			
E2570197	19.7	20	22	88	
E2570920	20.0	16	22	82	
E2570200	20.0	20	22	88	
E2570210	21.0	20	22	88	
E2570220	22.0	20	22	88	
E2570922	22.0	25	22	98	
E2570240	24.0	25	26	102	
E2570250	25.0	25	26	102	
E2570260	26.0	25	26	102	
E2570270	27.0	25	26	102	
E2570280	28.0	25	26	102	
E2570290	29.0	25	26	102	
E2570300	30.0	25	26	102	
E2570320	32.0	32	32	112	
E2570340	34.0	32	32	112	
E2570350	35.0	32	32	112	
E2570360	36.0	32	32	112	
E2570380	38.0	32	38	118	
E2570938	38.0	40	38	130	
E2570400	40.0	32	38	118	
E2570903	40.0	40	38	130	

▶ Other shank design on your request.  
▶ TiN and TiCN Coatings are available on your request.

**Tolerances according to DIN 7160 & 7161**

	Tolerance range in $\mu\text{m}$					
	Nominal-Diameter in mm					
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50
e8	-14	-20	-25	-32	-40	-50
	-28	-38	-47	-59	-73	-89
h6	0	0	0	0	0	0
	-6	-8	-9	-11	-13	-16

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	38	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	



FLAT SHANK **E2571** SERIES  
FLAT SHANK **EQ571** SERIES

**HSS Co8, 2 FLUTE LONG LENGTH**

● HSS Co8, 2 SCHNEIDEN LANG  
○ FRAISE HSS Co8, 2 DENTS, LONGUE  
○ 2 TAGLIENTI, SERIE LUNGA - HSS Co8



p.C742~C745

Recommended ToolHolder	Flat Shank		Plain Shank	
	END MILL HOLDER	POWER MILLING CHUCK	ER COLLET CHUCK	SK SLIM CHUCK
◎	◎	◎	◎	◎
○	○	○	○	○

Unit : mm

EDP No.	Mill Diameter		Shank Diameter	Length of Cut	Overall Length
	UNCOATED	TiAlN			
E2571015	1.5	6	7	51	
E2571020	2.0	6	7	51	
E2571025	2.5	6	8	52	
E2571030	3.0	6	8	52	
E2571035	3.5	6	10	54	
E2571040	4.0	6	11	55	
E2571045	4.5	6	11	55	
E2571050	5.0	6	13	57	
E2571055	5.5	6	13	57	
E2571060	6.0	6	13	57	
E2571065	6.5	10	16	66	
E2571070	7.0	10	16	66	
E2571075	7.5	10	16	66	
E2571080	8.0	10	19	69	
E2571085	8.5	10	19	69	
E2571090	9.0	10	19	69	
E2571095	9.5	10	19	69	
E2571100	10.0	10	22	72	
E2571110	11.0	12	22	79	
E2571120	12.0	12	26	83	
E2571130	13.0	12	26	83	
E2571140	14.0	12	26	83	
E2571150	15.0	12	26	83	
E2571160	16.0	16	32	92	

**Tolerances according to DIN 7160 & 7161**

	Tolerance range in $\mu\text{m}$					
	Nominal-Diameter in mm					
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50
e8	-14	-20	-25	-32	-40	-50
	-28	-38	-47	-59	-73	-89
h6	0	0	0	0	0	0
	-6	-8	-9	-11	-13	-16

▶ Other shank design on your request. ▶ NEXT PAGE  
▶ TiN and TiCN Coatings are available on your request.

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	38	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	

◎ : Excellent ○ : Good



FLAT SHANK **E2571** SERIES  
FLAT SHANK **EQ571** SERIES

**HSS Co8, 2 FLUTE LONG LENGTH**

- HSS Co8, 2 SCHNEIDEN LANG
- FRAISE HSS Co8, 2 DENTS, LONGUE
- 2 TAGLIENTI, SERIE LUNGA - HSS Co8



p.C742~C745

Recommended ToolHolder	Flat Shank		Plain Shank	
	END MILL HOLDER	POWER MILLING CHUCK	ER COLLET CHUCK	SK SLIM CHUCK

Unit : mm

EDP No.	Mill Diameter	Shank Diameter		Length of Cut	Overall Length
		e8	h6		
E2571180	18.0	16	32	92	
E2571200	20.0	20	38	104	
E2571220	22.0	20	38	104	
E2571240	24.0	25	45	121	
E2571250	25.0	25	45	121	
E2571260	26.0	25	45	121	
E2571270	27.0	25	45	121	
E2571280	28.0	25	45	121	
E2571300	30.0	25	45	121	
E2571320	32.0	32	53	133	
E2571400	40.0	40	63	155	

- Other shank design on your request.
- TiN and TiCN Coatings are available on your request.

**Tolerances according to DIN 7160 & 7161**

	Tolerance range in $\mu\text{m}$					
	Nominal-Diameter in mm					
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50
e8	-14 -28	-20 -38	-25 -47	-32 -59	-40 -73	-50 -89
h6	0 -6	0 -8	0 -9	0 -11	0 -13	0 -16

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	35	38	40	42	45	48	50	52	54	56	58	60	62	64	66	68
HB	125	190	250	270	300	180	275	300	350	200	325	200	230	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎


ISO	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎



FLAT SHANK **E2510** SERIES  
FLAT SHANK **EQ510** SERIES

**HSS Co8, 2 FLUTE EXTRA LONG LENGTH**

- HSS Co8, 2 SCHNEIDEN EXTRA LANG
- FRAISE HSS Co8, 2 DENTS, EXTRA-LONGUE
- 2 TAGLIENTI, SERIE EXTRA LUNGA - HSS Co8



p.C742~C745

Recommended ToolHolder	Flat Shank		Plain Shank	
	END MILL HOLDER	POWER MILLING CHUCK	ER COLLET CHUCK	SK SLIM CHUCK

Unit : mm

EDP No.	Mill Diameter	Shank Diameter		Length of Cut	Overall Length
		e8	h6		
E2510025	2.5	6	8	56	
E2510030	3.0	6	8	56	
E2510035	3.5	6	10	59	
E2510040	4.0	6	11	63	
E2510045	4.5	6	11	63	
E2510050	5.0	6	13	68	
E2510055	5.5	6	13	68	
E2510060	6.0	6	13	68	
E2510065	6.5	10	16	80	
E2510070	7.0	10	16	80	
E2510080	8.0	10	19	88	
E2510085	8.5	10	19	88	
E2510090	9.0	10	19	88	
E2510100	10.0	10	22	95	
E2510120	12.0	12	26	110	
E2510140	14.0	12	26	110	
E2510160	16.0	16	32	123	
E2510180	18.0	16	32	123	
E2510200	20.0	20	38	141	
E2510220	22.0	20	38	141	
E2510240	24.0	25	45	166	
E2510250	25.0	25	45	166	
E2510260	26.0	25	45	166	
E2510280	28.0	25	45	166	
E2510300	30.0	25	45	166	
E2510320	32.0	32	53	186	
E2510360	36.0	32	53	186	
E2510400	40.0	32	63	207	
E2510940	40.0	40	63	217	

**Tolerances according to DIN 7160 & 7161**

	Tolerance range in $\mu\text{m}$					
	Nominal-Diameter in mm					
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50
e8	-14 -28	-20 -38	-25 -47	-32 -59	-40 -73	-50 -89
h6	0 -6	0 -8	0 -9	0 -11	0 -13	0 -16

- Other shank design on your request.
- TiN and TiCN Coatings are available on your request.

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	35	38	40	42	45	48	50	52	54	56	58	60	62	64	66	68
HB	125	190	250	270	300	180	275	300	350	200	325	200	230	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

**HSS Co8, 2 FLUTE 42° HELIX SHORT LENGTH for ALUMINUM**

● HSS Co8, 2 SCHNEIDEN 42° RECHTSSPIRALE KURZ FÜR ALUMINIUM  
 ○ FRAISE HSS Co8, 2 DENTS, HÉLICE 42°, POUR ALUMINIUM, COURTE  
 ○ 2 TAGLIENTI, ELICA 42°, SERIE CORTA - HSS Co8

for ALUMINIUM  
für ALUMINIUM



	Flat Shank	Plain Shank
Recommended ToolHolder	END MILL HOLDER	POWER MILLING CHUCK
		ER COLLET CHUCK SK SLIM CHUCK

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
UNCOATED	e8	h6		
E2464010	1.0	6	3	49
E2464015	1.5	6	5	49
E2464020	2.0	6	7	51
E2464025	2.5	6	8	52
E2464030	3.0	6	8	52
E2464035	3.5	6	10	54
E2464040	4.0	6	11	55
E2464045	4.5	6	11	55
E2464050	5.0	6	13	57
E2464055	5.5	6	13	57
E2464060	6.0	6	13	57
E2464065	6.5	10	16	66
E2464070	7.0	10	16	66
E2464075	7.5	10	16	66
E2464080	8.0	10	19	69
E2464085	8.5	10	19	69
E2464090	9.0	10	19	69
E2464100	10.0	10	22	72
E2464110	11.0	12	22	79
E2464120	12.0	12	26	83
E2464130	13.0	12	26	83
E2464140	14.0	12	26	83
E2464150	15.0	12	26	83

▶ Other shank design on your request.  
 ▶ TiN and TiCN Coatings are available on your request.

▶ NEXT PAGE

**Tolerances according to DIN 7160 & 7161**

	Tolerance range in $\mu\text{m}$					
	Nominal-Diameter in mm					
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50
e8	-14 -28	-20 -38	-25 -47	-32 -59	-40 -73	-50 -89
h6	0 -6	0 -8	0 -9	0 -11	0 -13	0 -16

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	29	32	38	35	35	15	23	10	10	26	3	25	10	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○			○					○										

ISO	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	○						◎	◎	◎	◎	◎						

**HSS Co8, 2 FLUTE 42° HELIX SHORT LENGTH for ALUMINUM**

● HSS Co8, 2 SCHNEIDEN 42° RECHTSSPIRALE KURZ FÜR ALUMINIUM  
 ○ FRAISE HSS Co8, 2 DENTS, HÉLICE 42°, POUR ALUMINIUM, COURTE  
 ○ 2 TAGLIENTI, ELICA 42°, SERIE CORTA - HSS Co8

for ALUMINIUM  
für ALUMINIUM



	Flat Shank	Plain Shank
Recommended ToolHolder	END MILL HOLDER	POWER MILLING CHUCK
		ER COLLET CHUCK SK SLIM CHUCK

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
UNCOATED	e8	h6		
E2464160	16.0	16	32	92
E2464170	17.0	16	32	92
E2464180	18.0	16	32	92
E2464190	19.0	16	32	92
E2464200	20.0	20	38	104
E2464210	21.0	20	38	104
E2464220	22.0	20	38	104
E2464230	23.0	20	38	104
E2464240	24.0	25	45	121
E2464250	25.0	25	45	121
E2464260	26.0	25	45	121
E2464280	28.0	25	45	121
E2464300	30.0	25	45	121
E2464320	32.0	32	53	133

▶ Other shank design on your request.  
 ▶ TiN and TiCN Coatings are available on your request.

**Tolerances according to DIN 7160 & 7161**

	Tolerance range in $\mu\text{m}$					
	Nominal-Diameter in mm					
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50
e8	-14 -28	-20 -38	-25 -47	-32 -59	-40 -73	-50 -89
h6	0 -6	0 -8	0 -9	0 -11	0 -13	0 -16

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	29	32	38	35	35	15	23	10	10	26	3	25	10	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○			○					○										

ISO	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	○						◎	◎	◎	◎	◎						



**HSS Co8, 2 FLUTE 42° HELIX LONG LENGTH for ALUMINIUM**

● HSS Co8, 2 SCHNEIDEN 42° RECHTSSPIRALE KURZ FÜR ALUMINIUM  
 ○ FRAISE HSS Co8, 2 DENTS, HÉLICE 42°, POUR ALUMINIUM, LONGUE  
 ○ 2 TAGLIENTI, ELICA 42°, SERIE LUNGA - HSS Co8

for ALUMINIUM  
für ALUMINIUM



HSS Co8 DIN 844 2 42° DIN 1835B UNCOATED p.C741

Recommended ToolHolder  
 Flat Shank: END MILL HOLDER  
 Plain Shank: POWER MILLING CHUCK, ER COLLET CHUCK, SK SLIM CHUCK

Unit : mm

EDP No.	Mill Diameter	Shank Diameter		Length of Cut	Overall Length
		e8	h6		
UNCOATED					
E2509020	2.0		6	10	54
E2509030	3.0		6	12	56
E2509040	4.0		6	19	63
E2509050	5.0		6	24	68
E2509060	6.0		6	24	68
E2509070	7.0		10	30	80
E2509080	8.0		10	38	88
E2509090	9.0		10	38	88
E2509100	10.0		10	45	95
E2509110	11.0		12	45	102
E2509120	12.0		12	53	110
E2509130	13.0		12	53	110
E2509140	14.0		12	53	110
E2509150	15.0		12	53	110
E2509160	16.0		16	63	123
E2509180	18.0		16	63	123
E2509200	20.0		20	75	141

- ▶ Other shank design on your request.
- ▶ TiN and TiCN Coatings are available on your request.

**Tolerances according to DIN 7160 & 7161**

	Tolerance range in $\mu\text{m}$					
	Nominal-Diameter in mm					
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50
e8	-14 -28	-20 -38	-25 -47	-32 -59	-40 -73	-50 -89
h6	0 -6	0 -8	0 -9	0 -11	0 -13	0 -16

◎ : Excellent ○ : Good


ISO Material Description	P									M				K							
	Non-alloy steel			Low alloy steel			High alloyed steel, and tool steel			Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron					
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO Material Description	N						S						H									
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	55	60	42	42	55	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

**HSS Co8, 3 FLUTE STUB LENGTH**

● HSS Co8, 3 SCHNEIDEN EXTRA KURZ  
 ○ FRAISE HSS Co8, 3 DENTS, EXTRA-COURTE  
 ○ 3 TAGLIENTI. SERIE EXTRA CORTA - HSS Co8

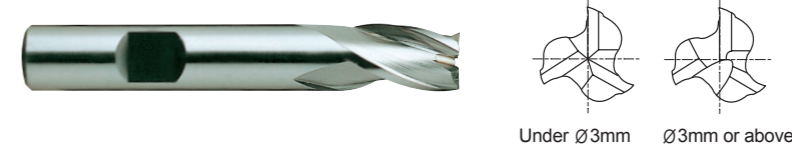

HSS Co8 DIN 327 3 30° DIN 1835B UNCOATED TiAlN p.C746~C753

Recommended ToolHolder  
 Flat Shank: END MILL HOLDER  
 Plain Shank: POWER MILLING CHUCK, ER COLLET CHUCK, SK SLIM CHUCK

Unit : mm

EDP No.	Mill Diameter	Shank Diameter		Length of Cut	Overall Length
		e8	h6		
UNCOATED					
EQ572015	1.5		6	3	47
EQ572020	2.0		6	4	48
EQ572025	2.5		6	5	49
EQ572030	3.0		6	5	49
EQ572035	3.5		6	6	50
EQ572040	4.0		6	7	51
EQ572045	4.5		6	7	51
EQ572050	5.0		6	8	52
EQ572055	5.5		6	8	52
EQ572060	6.0		6	8	52
EQ572065	6.5		10	10	60
EQ572070	7.0		10	10	60
EQ572075	7.5		10	10	60
EQ572080	8.0		10	11	61
EQ572085	8.5		10	11	61
EQ572100	10.0		10	13	63
EQ572120	12.0		12	16	73
EQ572140	14.0		12	16	73
EQ572150	15.0		12	16	73
EQ572160	16.0		16	19	79
EQ572180	18.0		16	19	79
EQ572200	20.0		20	22	88
EQ572220	22.0		20	22	88
EQ572240	24.0		25	26	102
EQ572250	25.0		25	26	102
EQ572260	26.0		25	26	102
EQ572280	28.0		25	26	102
EQ572300	30.0		25	26	102
EQ572320	32.0		32	32	112

**Tolerances according to DIN 7160 & 7161**

	Tolerance range in $\mu\text{m}$					
	Nominal-Diameter in mm					
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50
e8	-14 -28	-20 -38	-25 -47	-32 -59	-40 -73	-50 -89
h6	0 -6	0 -8	0 -9	0 -11	0 -13	0 -16

- ▶ Other shank design on your request.
- ▶ TiN and TiCN Coatings are available on your request.

◎ : Excellent ○ : Good

ISO Material Description	P									M				K							
	Non-alloy steel			Low alloy steel			High alloyed steel, and tool steel			Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron					
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○	○

ISO Material Description	N						S						H									
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	55	60	42	42	55	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○



FLAT SHANK **E2573** SERIES  
FLAT SHANK **EQ573** SERIES

**HSS Co8, 3 FLUTE SHORT LENGTH**

● **HSS Co8, 3 SCHNEIDEN KURZ**  
○ **FRAISE HSS Co8, 3 DENTS, COURTE**  
○ **3 TAGLIENTI, SERIE CORTA - HSS Co8**



HSS Co8
DIN 844
3
30°
DIN 1835B
UNCOATED
TiAIN
p.C746~C753

Flat Shank	Plain Shank
END MILL HOLDER	POWER MILLING CHUCK
-	ER COLLET CHUCK SK SLIM CHUCK

Recommended ToolHolder

Unit : mm

EDP No.	Mill Diameter	Shank Diameter		Length of Cut	Overall Length
		e8	h6		
<b>UNCOATED</b>	<b>TiAIN</b>				
E2573010	EQ573010	1.0	6	3	47
E2573015	EQ573015	1.5	6	7	51
E2573020	EQ573020	2.0	6	7	51
E2573025	EQ573025	2.5	6	8	52
E2573030	EQ573030	3.0	6	8	52
E2573035	EQ573035	3.5	6	10	54
E2573040	EQ573040	4.0	6	11	55
E2573045	EQ573045	4.5	6	11	55
E2573050	EQ573050	5.0	6	13	57
E2573055	EQ573055	5.5	6	13	57
E2573060	EQ573060	6.0	6	13	57
E2573065	EQ573065	6.5	10	16	66
E2573070	EQ573070	7.0	10	16	66
E2573075	EQ573075	7.5	10	16	66
E2573080	EQ573080	8.0	10	19	69
E2573085	EQ573085	8.5	10	19	69
E2573090	EQ573090	9.0	10	19	69
E2573095	EQ573095	9.5	10	19	69
E2573100	EQ573100	10.0	10	22	72
E2573120	EQ573120	12.0	12	26	83
E2573140	EQ573140	14.0	12	26	83
E2573150	EQ573150	15.0	12	26	83

▶ Other shank design on your request.  
▶ TiN and TiCN Coatings are available on your request.

▶ NEXT PAGE

**Tolerances according to DIN 7160 & 7161**

	Tolerance range in $\mu\text{m}$					
	Nominal-Diameter in mm					
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50
<b>e8</b>	-14 -28	-20 -38	-25 -47	-32 -59	-40 -73	-50 -89
<b>h6</b>	0 -6	0 -8	0 -9	0 -11	0 -13	0 -16

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron			
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S				H							
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron					
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎



FLAT SHANK **E2573** SERIES  
FLAT SHANK **EQ573** SERIES

**HSS Co8, 3 FLUTE SHORT LENGTH**

● **HSS Co8, 3 SCHNEIDEN KURZ**  
○ **FRAISE HSS Co8, 3 DENTS, COURTE**  
○ **3 TAGLIENTI, SERIE CORTA - HSS Co8**



HSS Co8
DIN 844
3
30°
DIN 1835B
UNCOATED
TiAIN
p.C746~C753

Flat Shank	Plain Shank
END MILL HOLDER	POWER MILLING CHUCK
-	ER COLLET CHUCK SK SLIM CHUCK

Recommended ToolHolder

Unit : mm

EDP No.	Mill Diameter	Shank Diameter		Length of Cut	Overall Length
		e8	h6		
<b>UNCOATED</b>	<b>TiAIN</b>				
E2573160	EQ573160	16.0	16	32	92
E2573180	EQ573180	18.0	16	32	92
E2573200	EQ573200	20.0	20	38	104
E2573220	EQ573220	22.0	20	38	104
E2573240	EQ573240	24.0	25	45	121
E2573250	EQ573250	25.0	25	45	121
E2573260	EQ573260	26.0	25	45	121
E2573280	EQ573280	28.0	25	45	121
E2573300	EQ573300	30.0	25	45	121
E2573320	EQ573320	32.0	32	53	133
E2573400	EQ573400	40.0	40	63	155

▶ Other shank design on your request.  
▶ TiN and TiCN Coatings are available on your request.

**Tolerances according to DIN 7160 & 7161**

	Tolerance range in $\mu\text{m}$					
	Nominal-Diameter in mm					
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50
<b>e8</b>	-14 -28	-20 -38	-25 -47	-32 -59	-40 -73	-50 -89
<b>h6</b>	0 -6	0 -8	0 -9	0 -11	0 -13	0 -16

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron			
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎


ISO	N										S				H							
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron					
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎



FLAT SHANK **E2516** SERIES  
FLAT SHANK **EQ516** SERIES

**HSS Co8, 3 FLUTE LONG LENGTH**

● **HSS Co8, 3 SCHNEIDEN LANG**  
● **FRAISE HSS Co8, 3 DENTS, LONGUE**  
● **3 TAGLIENTI, SERIE LUNGA - HSS Co8**



Up to Ø2.5mm Over Ø2.5mm

HSS Co8
DIN 844
3
30°
DIN 1835B
UNCOATED
TiAlN
p.C746~C753

Flat Shank	Plain Shank
END MILL HOLDER	POWER MILLING CHUCK
-	ER COLLET CHUCK
-	SK SLIM CHUCK

Recommended ToolHolder

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	
					UNCOATED
E2516020	EQ516020	2.0	6	10	54
E2516025	EQ516025	2.5	6	12	56
E2516030	EQ516030	3.0	6	12	56
E2516035	EQ516035	3.5	6	15	59
E2516040	EQ516040	4.0	6	19	63
E2516045	EQ516045	4.5	6	19	63
E2516050	EQ516050	5.0	6	24	68
E2516055	EQ516055	5.5	6	24	68
E2516060	EQ516060	6.0	6	24	68
E2516070	EQ516070	7.0	10	30	80
E2516075	EQ516075	7.5	10	30	80
E2516080	EQ516080	8.0	10	38	88
E2516090	EQ516090	9.0	10	38	88
E2516100	EQ516100	10.0	10	45	95
E2516110	EQ516110	11.0	12	45	102
E2516120	EQ516120	12.0	12	53	110
E2516130	EQ516130	13.0	12	53	110
E2516140	EQ516140	14.0	12	53	110
E2516150	EQ516150	15.0	12	53	110
E2516160	EQ516160	16.0	16	63	123
E2516170	EQ516170	17.0	16	63	123
E2516180	EQ516180	18.0	16	63	123
E2516190	EQ516190	19.0	16	63	123
E2516901	EQ516901	20.0	16	75	135

**Tolerances according to DIN 7160 & 7161**  
 ▶ Other shank design on your request. ▶ NEXT PAGE  
 ▶ TiN and TiCN Coatings are available on your request.

	Tolerance range in $\mu\text{m}$					
	Nominal-Diameter in mm					
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50
<b>e8</b>	-14 -28	-20 -38	-25 -47	-32 -59	-40 -73	-50 -89
<b>h6</b>	0 -6	0 -8	0 -9	0 -11	0 -13	0 -16

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	35	38	40	42	45	48	50	52	54	56	58	60	62	64	66	68
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎


ISO	N										S				H						
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys		Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎



FLAT SHANK **E2516** SERIES  
FLAT SHANK **EQ516** SERIES

**HSS Co8, 3 FLUTE LONG LENGTH**

● **HSS CO8, 3 SCHNEIDEN LANG**  
● **FRAISE HSS Co8, 3 DENTS, LONGUE**  
● **3 TAGLIENTI, SERIE LUNGA - HSS Co8**



Up to Ø2.5mm Over Ø2.5mm

HSS Co8
DIN 844
3
30°
FLAT
UNCOATED
TiAlN
p.C746~C753

Flat Shank	Plain Shank
END MILL HOLDER	POWER MILLING CHUCK
-	ER COLLET CHUCK
-	SK SLIM CHUCK

Recommended ToolHolder

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	
					UNCOATED
E2516200	EQ516200	20.0	20	75	141
E2516220	EQ516220	22.0	20	75	141
E2516240	EQ516240	24.0	25	90	166
E2516250	EQ516250	25.0	25	90	166
E2516260	EQ516260	26.0	25	90	166
E2516280	EQ516280	28.0	25	90	166
E2516300	EQ516300	30.0	25	90	166
E2516320	EQ516320	32.0	32	106	186
E2516350	EQ516350	35.0	32	106	186
E2516360	EQ516360	36.0	32	106	186
E2516400	EQ516400	40.0	40	125	217

▶ Other shank design on your request.  
 ▶ TiN and TiCN Coatings are available on your request.

**Tolerances according to DIN 7160 & 7161**

	Tolerance range in $\mu\text{m}$					
	Nominal-Diameter in mm					
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50
<b>e8</b>	-14 -28	-20 -38	-25 -47	-32 -59	-40 -73	-50 -89
<b>h6</b>	0 -6	0 -8	0 -9	0 -11	0 -13	0 -16

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	35	38	40	42	45	48	50	52	54	56	58	60	62	64	66	68
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S				H						
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys		Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎



FLAT SHANK **E2553** SERIES  
FLAT SHANK **EQ553** SERIES

**HSS Co8, 3 FLUTE SHORT LENGTH THROW AWAY**

● **HSS Co8, 3 SCHNEIDEN KURZ EINWEGFRÄSER**  
○ **FRAISE HSS Co8, 3 DENTS À JETER, COURTE**  
○ **3 TAGLIENTI, SERIE CORTA NON RIAFFILABILE - HSS Co8**



HSS Co8
YG STD
3
30°
FLAT
UNCOATED
TiAlN
p.C746~C753
Recommended ToolHolder

Flat Shank	Plain Shank
END MILL HOLDER	POWER MILLING CHUCK
-	ER COLLET CHUCK
-	SK SLIM CHUCK

EDP No.	Mill Diameter	Shank Diameter		Length of Cut	Overall Length
		e8	h6		
E2553010	1.0	6	6	2	34
E2553013	1.3	6	6	3	34
E2553015	1.5	6	6	3	34
E2553018	1.8	6	6	3	34
E2553020	2.0	6	6	4	35
E2553023	2.3	6	6	4	35
E2553025	2.5	6	6	5	36
E2553028	2.8	6	6	5	36
E2553030	3.0	6	6	5	36
E2553033	3.3	6	6	6	37
E2553035	3.5	6	6	6	37
E2553038	3.8	6	6	7	38
E2553040	4.0	6	6	7	38
E2553043	4.3	6	6	7	38
E2553045	4.5	6	6	7	38
E2553048	4.8	6	6	8	39
E2553050	5.0	6	6	8	39
E2553053	5.3	6	6	8	39
E2553055	5.5	6	6	8	39
E2553957	5.8	6	6	8	39
E2553060	6.0	6	6	8	39
E2553065	6.5	8	8	10	42
E2553070	7.0	8	8	10	42
E2553075	7.5	8	8	10	42

▶ TiN and TiCN Coatings are available on your request. ▶ NEXT PAGE

**Tolerances according to DIN 7160 & 7161**

	Tolerance range in $\mu\text{m}$					
	Nominal-Diameter in mm					
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50
e8	-14	-20	-25	-32	-40	-50
	-28	-38	-47	-59	-73	-89
h6	0	0	0	0	0	0
	-6	-8	-9	-11	-13	-16

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron			
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎



FLAT SHANK **E2553** SERIES  
FLAT SHANK **EQ553** SERIES

**HSS Co8, 3 FLUTE SHORT LENGTH THROW AWAY**

● **HSS Co8, 3 SCHNEIDEN KURZ EINWEGFRÄSER**  
○ **FRAISE HSS Co8, 3 DENTS À JETER, COURTE**  
○ **3 TAGLIENTI, SERIE CORTA NON RIAFFILABILE - HSS Co8**



HSS Co8
YG STD
3
30°
FLAT
UNCOATED
TiAlN
p.C746~C753
Recommended ToolHolder

Flat Shank	Plain Shank
END MILL HOLDER	POWER MILLING CHUCK
-	ER COLLET CHUCK
-	SK SLIM CHUCK

EDP No.	Mill Diameter	Shank Diameter		Length of Cut	Overall Length
		e8	h6		
E2553080	8.0	8	8	11	43
E2553085	8.5	10	10	11	48
E2553090	9.0	10	10	11	48
E2553095	9.5	10	10	11	48
E2553100	10.0	10	10	13	50
E2553120	12.0	12	12	16	58
E2553160	16.0	16	16	19	64
E2553200	20.0	20	20	22	78

▶ TiN and TiCN Coatings are available on your request.

**Tolerances according to DIN 7160 & 7161**

	Tolerance range in $\mu\text{m}$					
	Nominal-Diameter in mm					
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50
e8	-14	-20	-25	-32	-40	-50
	-28	-38	-47	-59	-73	-89
h6	0	0	0	0	0	0
	-6	-8	-9	-11	-13	-16

**SET ORDERING No.:**  
**E2SET553**  
\* 12PCS. SET  
SHORT LENGTH  
- 2PCS. OF EACH SIZE  
2, 3, 4, 5, 6mm (C3FSC)  
- 1PC. OF EACH SIZE  
8, 10mm (C3FSC)

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron			
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎



FLAT SHANK **E2554** SERIES

FLAT SHANK **EQ554** SERIES

**HSS Co8, 3 FLUTE LONG LENGTH THROW AWAY**

- HSS Co8, 3 SCHNEIDEN LANG EINWEGFRÄSER
- FRAISE HSS Co8, 3 DENTS À JETER, LONGUE
- 3 TAGLIENTI, SERIE LUNGA, NON RIAFFILABILE - HSS Co8



HSS Co8
YG STD
3
30°
FLAT
UNCOATED
TiAIN
p.C746~C753

Flat Shank	Plain Shank
END MILL HOLDER	POWER MILLING CHUCK
	ER COLLET CHUCK
	SK SLIM CHUCK

Recommended ToolHolder

Unit : mm

EDP No.	Mill Diameter		Shank Diameter		Length of Cut	Overall Length
	UNCOATED	TiAIN	e8	h6		
E2554015	EQ554015	1.5	6	4	35	
E2554020	EQ554020	2.0	6	7	38	
E2554025	EQ554025	2.5	6	8	39	
E2554030	EQ554030	3.0	6	8	39	
E2554035	EQ554035	3.5	6	10	41	
E2554040	EQ554040	4.0	6	11	42	
E2554045	EQ554045	4.5	6	11	42	
E2554050	EQ554050	5.0	6	13	44	
E2554055	EQ554055	5.5	6	13	44	
E2554060	EQ554060	6.0	6	13	44	
E2554065	EQ554065	6.5	8	16	48	
E2554070	EQ554070	7.0	8	16	48	
E2554075	EQ554075	7.5	8	16	48	
E2554080	EQ554080	8.0	8	19	51	
E2554085	EQ554085	8.5	10	19	56	
E2554090	EQ554090	9.0	10	19	56	
E2554095	EQ554095	9.5	10	19	56	
E2554100	EQ554100	10.0	10	22	59	

► TiN and TiCN Coatings are available on your request.

**Tolerances according to DIN 7160 & 7161**

	Tolerance range in $\mu$ m					
	Nominal-Diameter in mm					
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50
e8	-14 -28	-20 -38	-25 -47	-32 -59	-40 -73	-50 -89
h6	0 -6	0 -8	0 -9	0 -11	0 -13	0 -16

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	35	38	40	42	45	48	50	52	54	56	58	60	62	64	66	68
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎



FLAT SHANK **E2574** SERIES

FLAT SHANK **EQ574** SERIES

**HSS Co8, 4 FLUTE SHORT LENGTH**

- HSS Co8, 4&6 SCHNEIDEN KURZ
- FRAISE HSS Co8, 4&6 DENTS, COURTE
- HSS CO8, 4&6 TAGLIENTI, SERIE CORTA



HSS Co8
DIN 844
4
30°
DIN 1835B
UNCOATED
TiAIN
p.C754~C757

Flat Shank	Plain Shank
END MILL HOLDER	POWER MILLING CHUCK
	ER COLLET CHUCK
	SK SLIM CHUCK

Recommended ToolHolder

Unit : mm

EDP No.	Mill Diameter		Shank Diameter		Length of Cut	Overall Length	No. of Flute
	UNCOATED	TiAIN	e8	h6			
E2574020	EQ574020	2.0	6	7	51	4	
E2574025	EQ574025	2.5	6	8	52	4	
E2574030	EQ574030	3.0	6	8	52	4	
E2574035	EQ574035	3.5	6	10	54	4	
E2574040	EQ574040	4.0	6	11	55	4	
E2574050	EQ574050	5.0	6	13	57	4	
E2574060	EQ574060	6.0	6	13	57	4	
E2574070	EQ574070	7.0	10	16	66	4	
E2574080	EQ574080	8.0	10	19	69	4	
E2574090	EQ574090	9.0	10	19	69	4	
E2574100	EQ574100	10.0	10	22	72	4	
E2574110	EQ574110	11.0	12	22	79	4	
E2574120	EQ574120	12.0	12	26	83	4	
E2574130	EQ574130	13.0	12	26	83	4	
E2574140	EQ574140	14.0	12	26	83	4	
E2574150	EQ574150	15.0	12	26	83	4	
E2574160	EQ574160	16.0	16	32	92	4	
E2574170	EQ574170	17.0	16	32	92	4	
E2574180	EQ574180	18.0	16	32	92	4	
E2574190	EQ574190	19.0	16	32	92	4	
E2574200	EQ574200	20.0	20	38	104	4	

► Other shank design on your request.

► TiN and TiCN Coatings are available on your request.

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ + 0.04	h6

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	35	38	40	42	45	48	50	52	54	56	58	60	62	64	66	68
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎



FLAT SHANK **E2595** SERIES

FLAT SHANK **EQ595** SERIES

**HSS Co8, 4 FLUTE SHORT LENGTH - CENTER CUT**

- HSS Co8, 4&6 SCHNEIDEN KURZ
- FRAISE HSS Co8, 4&6 DENTS, COUPE AU CENTRE, COURTE
- 4 - 6 TAGLIENTI, SERIE CORTA, TAGLIENTE AL CENTRO - HSS Co8



HSS Co8
DIN 844
4
30°
DIN 1835B
UNCOATED
TiAIN
p.C762~C765

Flat Shank	Plain Shank
END MILL HOLDER	POWER MILLING CHUCK
-	ER COLLET CHUCK
-	SK SLIM CHUCK

Recommended ToolHolder

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	
					UNCOATED
E2595020	EQ595020	2.0	6	7	51
E2595030	EQ595030	3.0	6	8	52
E2595040	EQ595040	4.0	6	11	55
E2595050	EQ595050	5.0	6	13	57
E2595060	EQ595060	6.0	6	13	57
E2595070	EQ595070	7.0	10	16	66
E2595080	EQ595080	8.0	10	19	69
E2595090	EQ595090	9.0	10	19	69
E2595100	EQ595100	10.0	10	22	72
E2595110	EQ595110	11.0	12	22	79
E2595120	EQ595120	12.0	12	26	83
E2595130	EQ595130	13.0	12	26	83
E2595140	EQ595140	14.0	12	26	83
E2595150	EQ595150	15.0	12	26	83
E2595160	EQ595160	16.0	16	32	92
E2595170	EQ595170	17.0	16	32	92
E2595180	EQ595180	18.0	16	32	92
E2595190	EQ595190	19.0	16	32	92
E2595200	EQ595200	20.0	16	38	98
E2595220	EQ595220	22.0	20	38	104
E2595250	EQ595250	25.0	25	45	121

- ▶ Other shank design on your request.
- ▶ TiN and TiCN Coatings are available on your request.

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ + 0.04	h6

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	130	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	15	30	25	38	34						200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
HB	60	100	75	90	130	110	90	100								400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○																



FLAT SHANK **E2597** SERIES

FLAT SHANK **EQ597** SERIES

**HSS Co8, 4 FLUTE LONG LENGTH - CENTER CUT**

- HSS Co8, 4&6 SCHNEIDEN LANG
- FRAISE HSS Co8, 4&6 DENTS, COUPE AU CENTRE, LONGUE
- 4&6 TAGLIENTI, SERIE LUNGA, TAGLIENTE AL CENTRO - HSS Co8



HSS Co8
DIN 844
4
30°
DIN 1835B
UNCOATED
TiAIN
p.C754~C757

Flat Shank	Plain Shank
END MILL HOLDER	POWER MILLING CHUCK
-	ER COLLET CHUCK
-	SK SLIM CHUCK

Recommended ToolHolder

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	
					UNCOATED
E2597020	EQ597020	2.0	6	10	54
E2597025	EQ597025	2.5	6	12	56
E2597030	EQ597030	3.0	6	12	56
E2597035	EQ597035	3.5	6	15	59
E2597040	EQ597040	4.0	6	19	63
E2597045	EQ597045	4.5	6	19	63
E2597050	EQ597050	5.0	6	24	68
E2597055	EQ597055	5.5	6	24	68
E2597060	EQ597060	6.0	6	24	68
E2597070	EQ597070	7.0	10	30	80
E2597080	EQ597080	8.0	10	38	88
E2597090	EQ597090	9.0	10	38	88
E2597100	EQ597100	10.0	10	45	95
E2597110	EQ597110	11.0	12	45	102
E2597120	EQ597120	12.0	12	53	110
E2597130	EQ597130	13.0	12	53	110
E2597140	EQ597140	14.0	12	53	110
E2597150	EQ597150	15.0	12	53	110
E2597160	EQ597160	16.0	16	63	123
E2597170	EQ597170	17.0	16	63	123
E2597180	EQ597180	18.0	16	63	123
E2597190	EQ597190	19.0	16	63	123
E2597200	EQ597200	20.0	20	75	141

- ▶ Other shank design on your request.
- ▶ TiN and TiCN Coatings are available on your request.

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
up to Ø6	0 ~ + 0.04
over Ø6	0 ~ + 0.05

◎ : Excellent ○ : Good


ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	130	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	15	30	25	38	34						200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
HB	60	100	75	90	130	110	90	100								400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○																

**HSS Co8, MULTI FLUTE SHORT LENGTH ROUGHING - FINE**

- HSS Co8, MULTI SCHNEIDEN KURZ SCHRUPPFRÄSER - FEIN
- FRAISE HSS Co8, MULTI-DENTS ÉBAUCHE, PAS FIN, COURTE
- MULTI TAGLIENTE, PER SGROSSATURA, SERIE CORTA, BOMBATO FINE - HSS Co8

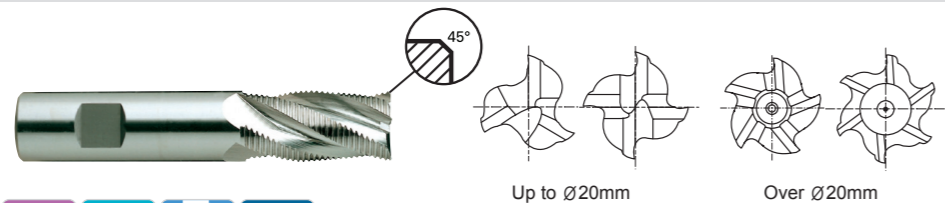

HSS Co8
DIN 844
HR
3-6
30°
DIN 1835B

~Ø20
Ø25~
C x 45°
UNCOATED
TiAIN

p.C758~C761

Recommended ToolHolder	Flat Shank	Plain Shank
	END MILL HOLDER	POWER MILLING CHUCK
		ER COLLET CHUCK SK SLIM CHUCK


Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	No. of Flute	Chamfer	
							UNCOATED
E2753060	EQ753060	6.0	6	13	57	3	0.18
E2753070	EQ753070	7.0	10	16	66	3	0.18
E2753080	EQ753080	8.0	10	19	69	3	0.18
E2753090	EQ753090	9.0	10	19	69	3	0.18
E2753100	EQ753100	10.0	10	22	72	4	0.18
E2753110	EQ753110	11.0	12	22	79	4	0.18
E2753120	EQ753120	12.0	12	26	83	4	0.18
E2753130	EQ753130	13.0	12	26	83	4	0.18
E2753140	EQ753140	14.0	12	26	83	4	0.25
E2753150	EQ753150	15.0	12	26	83	4	0.25
E2753160	EQ753160	16.0	16	32	92	4	0.25
E2753180	EQ753180	18.0	16	32	92	4	0.25
E2753200	EQ753200	20.0	20	38	104	4	0.25
E2753250	EQ753250	25.0	25	45	121	5	0.36
E2753280	EQ753280	28.0	25	45	121	6	0.36
E2753300	EQ753300	30.0	25	45	121	6	0.36
E2753320	EQ753320	32.0	32	53	133	6	0.51
E2753350	EQ753350	35.0	32	53	133	6	0.51
E2753400	EQ753400	40.0	32	63	155	6	0.56

- ▶ Other shank design on your request.
- ▶ TiN and TiCN Coatings are available on your request.

**Tolerances according to DIN 7160 & 7161**

	Tolerance range in $\mu\text{m}$					
	Nominal-Diameter in mm					
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50
js12	±50	±60	±75	±90	±105	±125
h6	0 -6	0 -8	0 -9	0 -11	0 -13	0 -16




◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron	Malleable cast iron			
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	35	38	40	42	45	48	50	52	55	58	60	62	64	66	68	70
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

**HSS Co8, MULTI FLUTE LONG LENGTH ROUGHING - FINE**

- HSS Co8, MULTI SCHNEIDEN LANG SCHRUPPFRÄSER - FEIN
- FRAISE HSS Co8, MULTI-DENTS ÉBAUCHE, PAS FIN, LONGUE
- MULTI TAGLIENTE, PER SGROSSATURA, SERIE LUNGA, BOMBATO FINE - HSS Co8

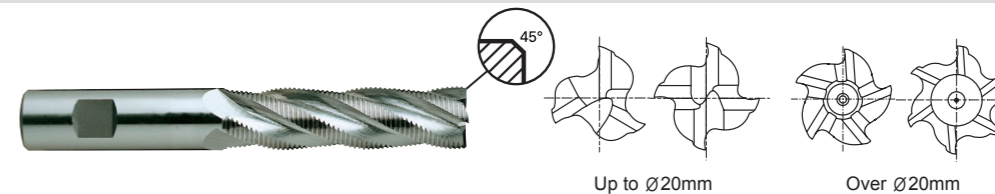

HSS Co8
DIN 844
HR
3-6
30°
DIN 1835B

~Ø20
Ø22~
C x 45°
UNCOATED
TiAIN

p.C758~C761

Recommended ToolHolder	Flat Shank	Plain Shank
	END MILL HOLDER	POWER MILLING CHUCK
		ER COLLET CHUCK SK SLIM CHUCK


Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	No. of Flute	Chamfer	
							UNCOATED
E2762060	EQ762060	6.0	6	24	68	3	0.18
E2762070	EQ762070	7.0	10	30	80	3	0.18
E2762080	EQ762080	8.0	10	38	88	3	0.18
E2762090	EQ762090	9.0	10	38	88	3	0.18
E2762100	EQ762100	10.0	10	45	95	4	0.18
E2762110	EQ762110	11.0	12	45	102	4	0.18
E2762120	EQ762120	12.0	12	53	110	4	0.18
E2762130	EQ762130	13.0	12	53	110	4	0.18
E2762140	EQ762140	14.0	12	53	110	4	0.25
E2762150	EQ762150	15.0	12	53	110	4	0.25
E2762160	EQ762160	16.0	16	63	123	4	0.25
E2762170	EQ762170	17.0	16	63	123	4	0.25
E2762180	EQ762180	18.0	16	63	123	4	0.25
E2762190	EQ762190	19.0	16	63	123	4	0.25
E2762200	EQ762200	20.0	20	75	141	4	0.25
E2762220	EQ762220	22.0	20	75	141	5	0.36
E2762240	EQ762240	24.0	25	90	166	5	0.36
E2762250	EQ762250	25.0	25	90	166	5	0.36
E2762260	EQ762260	26.0	25	90	166	6	0.36
E2762280	EQ762280	28.0	25	90	166	6	0.36
E2762300	EQ762300	30.0	25	90	166	6	0.36
E2762320	EQ762320	32.0	32	106	186	6	0.51
E2762350	EQ762350	35.0	32	106	186	6	0.51
E2762360	EQ762360	36.0	32	106	186	6	0.56
E2762380	EQ762380	38.0	32	125	217	6	0.56
E2762400	EQ762400	40.0	32	125	217	6	0.56
E2762940	EQ762940	40.0	40	125	217	6	0.56

- ▶ Other shank design on your request.
- ▶ TiN and TiCN Coatings are available on your request.

**Tolerances according to DIN 7160 & 7161**

	Tolerance range in $\mu\text{m}$					
	Nominal-Diameter in mm					
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50
js12	±50	±60	±75	±90	±105	±125
h6	0 -6	0 -8	0 -9	0 -11	0 -13	0 -16



◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron	Malleable cast iron			
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	35	38	40	42	45	48	50	52	55	58	60	62	64	66	68	70
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

**HSS Co8, 3 FLUTE 37° HELIX SHORT LENGTH ROUGHING for ALUMINUM**

● **HSS Co8, 3 SCHNEIDEN 37° RECHTSSPIRALE KURZ SCHRUPPFRÄSER FÜR ALUMINIUM**  
 ○ **FRAISE HSS Co8, 3 DENTS, ÉBAUCHE POUR ALUMINIUM, HÉLICE 37°, COURTE**  
 ◎ **3 TAGLIENTI, ELICA 37°, PER SGROSSATURA, SERIE CORTA - HSS Co8**

for ALUMINIUM  
für ALUMINIUM



HSS Co8
DIN 844
WR
3
37°
DIN 1835B  
C x 45°
UNCOATED
p.C766~C767

Recommended ToolHolder	Flat Shank		Plain Shank	
	END MILL HOLDER	ER COLLET CHUCK	POWER MILLING CHUCK	SK SLIM CHUCK
◎	◎	○	◎	○
○	○	◎	○	◎


Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Chamfer
UNCOATED	js12	h6			
E2755060	6.0	6	13	57	0.51
E2755080	8.0	10	19	69	0.51
E2755100	10.0	10	22	72	0.60
E2755120	12.0	12	26	83	0.74
E2755140	14.0	12	26	83	0.94
E2755160	16.0	16	32	92	0.94
E2755180	18.0	16	32	92	0.94
E2755200	20.0	20	38	104	0.94
E2755220	22.0	20	38	104	0.94
E2755250	25.0	25	45	121	0.94
E2755300	30.0	25	45	121	1.23

- ▶ Other shank design on your request.
- ▶ TiN and TiCN Coatings are available on your request.

**Tolerances according to DIN 7160 & 7161**

	Tolerance range in $\mu\text{m}$					
	Nominal-Diameter in mm					
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50
js12	±50	±60	±75	±90	±105	±125
h6	0 -6	0 -8	0 -9	0 -11	0 -13	0 -16



Enforced Cutting Edge

◎ : Excellent ○ : Good


ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HRc	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	○	○	◎	◎	○	○	○	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	○	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

**HSS Co8, MULTI FLUTE SHORT LENGTH ROUGHING - COARSE**

● **HSS Co8, MULTI SCHNEIDEN KURZ SCHRUPPFRÄSER - GROB**  
 ○ **FRAISE HSS Co8, MULTI-DENTS ÉBAUCHE, PAS GROSSIER, COURTE**  
 ◎ **MULTI TAGLIENTE, PER SGROSSATURA, SERIE CORTA, BOMBATO GROSSO - HSS Co8**

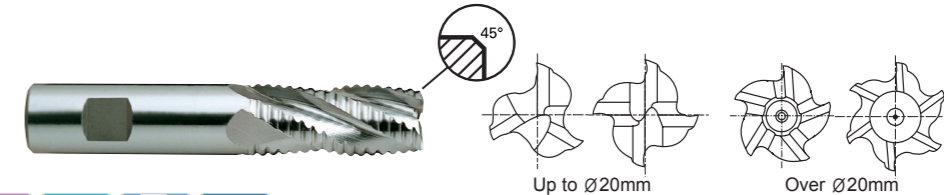

HSS Co8
DIN 844
NR
3-6
30°
DIN 1835B  
~Ø20
Ø22~
C x 45°
UNCOATED
TiAIN
p.C758~C761

Recommended ToolHolder	Flat Shank		Plain Shank	
	END MILL HOLDER	ER COLLET CHUCK	POWER MILLING CHUCK	SK SLIM CHUCK
◎	◎	○	◎	○
○	○	◎	○	◎

Unit : mm


EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	No. of Flute	Chamfer	
UNCOATED	TiAIN	js12	h6				
E2751060	EQ751060	6.0	6	13	57	3	0.25
E2751070	EQ751070	7.0	10	16	66	3	0.25
E2751080	EQ751080	8.0	10	19	69	3	0.25
E2751090	EQ751090	9.0	10	19	69	3	0.34
E2751095	EQ751095	9.5	10	19	69	3	0.34
E2751100	EQ751100	10.0	10	22	72	4	0.34
E2751110	EQ751110	11.0	12	22	79	4	0.50
E2751120	EQ751120	12.0	12	26	83	4	0.50
E2751125	EQ751125	12.5	12	26	83	4	0.50
E2751130	EQ751130	13.0	12	26	83	4	0.50
E2751140	EQ751140	14.0	12	26	83	4	0.55
E2751145	EQ751145	14.5	12	26	83	4	0.55
E2751150	EQ751150	15.0	12	26	83	4	0.55
E2751160	EQ751160	16.0	16	32	92	4	0.55
E2751170	EQ751170	17.0	16	32	92	4	0.55
E2751180	EQ751180	18.0	16	32	92	4	0.55
E2751190	EQ751190	19.0	16	32	92	4	0.55
E2751200	EQ751200	20.0	20	38	104	4	0.55
E2751901	EQ751901	20.0	16	38	98	4	0.55
E2751220	EQ751220	22.0	20	38	104	5	0.55

- ▶ Other shank design on your request.
- ▶ TiN and TiCN Coatings are available on your request.

▶ NEXT PAGE

**Tolerances according to DIN 7160 & 7161**

	Tolerance range in $\mu\text{m}$					
	Nominal-Diameter in mm					
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50
js12	±50	±60	±75	±90	±105	±125
h6	0 -6	0 -8	0 -9	0 -11	0 -13	0 -16



Enforced Cutting Edge

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	○	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎






FLAT SHANK **E2751** SERIES  
FLAT SHANK **EQ751** SERIES

**HSS Co8, MULTI FLUTE SHORT LENGTH ROUGHING - COARSE**

- HSS Co8, MULTI SCHNEIDEN KURZ SCHRUPPFRÄSER - GROB
- FRAISE HSS Co8, MULTI-DENTS ÉBAUCHE, PAS GROSSIER, COURTE
- MULTI TAGLIENTE, PER SGROSSATURA, SERIE CORTA, BOMBATO GROSSO - HSS Co8

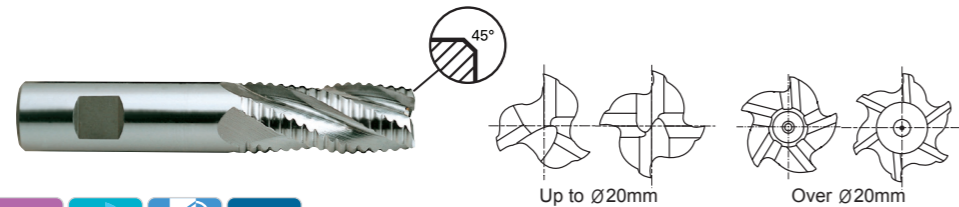

p.C758~C761

Recommended ToolHolder	Flat Shank	Plain Shank
	END MILL HOLDER	POWER MILLING CHUCK
		ER COLLET CHUCK SK SLIM CHUCK


Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	No. of Flute	Chamfer	
							UNCOATED
E2751240	EQ751240	24.0	25	45	121	5	0.55
E2751250	EQ751250	25.0	25	45	121	5	0.55
E2751260	EQ751260	26.0	25	45	121	6	0.55
E2751280	EQ751280	28.0	25	45	121	6	0.70
E2751300	EQ751300	30.0	25	45	121	6	0.70
E2751320	EQ751320	32.0	32	53	133	6	0.70
E2751340	EQ751340	34.0	32	53	133	6	0.70
E2751350	EQ751350	35.0	32	53	133	6	0.70
E2751360	EQ751360	36.0	32	53	133	6	0.70
E2751380	EQ751380	38.0	32	63	155	6	0.70
E2751938	EQ751938	38.0	40	63	155	6	0.70
E2751400	EQ751400	40.0	32	63	155	6	0.88
E2751940	EQ751940	40.0	40	63	155	6	0.88
E2751450	EQ751450	45.0	32	63	143	6	0.88
E2751500	EQ751500	50.0	50	75	177	6	0.88

- ▶ Other shank design on your request.
- ▶ TiN and TiCN Coatings are available on your request.

**Tolerances according to DIN 7160 & 7161**

	Tolerance range in $\mu\text{m}$					
	Nominal-Diameter in mm					
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50
js12	$\pm 50$	$\pm 60$	$\pm 75$	$\pm 90$	$\pm 105$	$\pm 125$
h6	0 -6	0 -8	0 -9	0 -11	0 -13	0 -16



Enforced Cutting Edge

◎ : Excellent ○ : Good


ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	35	38	40	42	45	48	50	52	55	58	60	62	64	66	68	70
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎



FLAT SHANK **E2752** SERIES  
FLAT SHANK **EQ752** SERIES

**HSS Co8, MULTI FLUTE LONG LENGTH ROUGHING - COARSE**

- HSS Co8, MULTI SCHNEIDEN LANG SCHRUPPFRÄSER - GROB
- FRAISE HSS Co8, MULTI-DENTS ÉBAUCHE, PAS GROSSIER, LONGUE
- MULTI TAGLIENTE, PER SGROSSATURA, SERIE LUNGA, BOMBATO GROSSO - HSS Co8

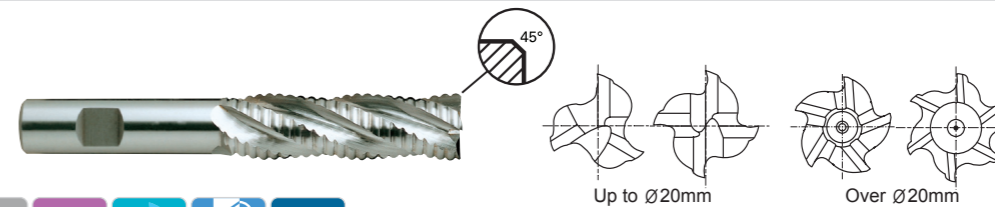

p.C758~C761

Recommended ToolHolder	Flat Shank	Plain Shank
	END MILL HOLDER	POWER MILLING CHUCK
		ER COLLET CHUCK SK SLIM CHUCK

Unit : mm


EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	No. of Flute	Chamfer	
							UNCOATED
E2752060	EQ752060	6.0	6	24	68	3	0.25
E2752070	EQ752070	7.0	10	30	80	3	0.25
E2752080	EQ752080	8.0	10	38	88	3	0.25
E2752090	EQ752090	9.0	10	38	88	3	0.34
E2752100	EQ752100	10.0	10	45	95	4	0.34
E2752110	EQ752110	11.0	12	45	102	4	0.50
E2752120	EQ752120	12.0	12	53	110	4	0.50
E2752130	EQ752130	13.0	12	53	110	4	0.50
E2752140	EQ752140	14.0	12	53	110	4	0.55
E2752150	EQ752150	15.0	12	53	110	4	0.55
E2752160	EQ752160	16.0	16	63	123	4	0.55
E2752170	EQ752170	17.0	16	63	123	4	0.55
E2752180	EQ752180	18.0	16	63	123	4	0.55
E2752190	EQ752190	19.0	16	63	123	4	0.55
E2752200	EQ752200	20.0	20	75	141	4	0.55
E2752901	EQ752901	20.0	16	75	135	4	0.55
E2752220	EQ752220	22.0	20	75	141	5	0.55
E2752902	EQ752902	22.0	25	75	151	5	0.55

- ▶ Other shank design on your request.
- ▶ TiN and TiCN Coatings are available on your request.

▶ NEXT PAGE

**Tolerances according to DIN 7160 & 7161**

	Tolerance range in $\mu\text{m}$					
	Nominal-Diameter in mm					
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50
js12	$\pm 50$	$\pm 60$	$\pm 75$	$\pm 90$	$\pm 105$	$\pm 125$
h6	0 -6	0 -8	0 -9	0 -11	0 -13	0 -16



Enforced Cutting Edge

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	35	38	40	42	45	48	50	52	55	58	60	62	64	66	68	70
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎




FLAT SHANK **E2752** SERIES


FLAT SHANK **EQ752** SERIES

**HSS Co8, MULTI FLUTE LONG LENGTH ROUGHING - COARSE**

- HSS Co8, MULTI SCHNEIDEN LANG SCHRUPPFRÄSER - GROB
- FRAISE HSS Co8, MULTI-DENTS ÉBAUCHE, PAS GROSSIER, LONGUE
- MULTI TAGLIENTE, PER SGROSSATURA, SERIE LUNGA, BOMBATO GROSSO - HSS Co8

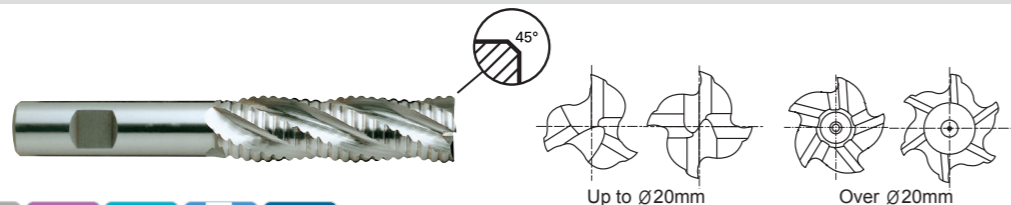

p.C758-C761




Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	No. of Flute	Chamfer	
							UNCOATED
E2752240	EQ752240	24.0	25	90	166	5	0.55
E2752250	EQ752250	25.0	25	90	166	5	0.55
E2752260	EQ752260	26.0	25	90	166	6	0.55
E2752280	EQ752280	28.0	25	90	166	6	0.70
E2752300	EQ752300	30.0	25	90	166	6	0.70
E2752320	EQ752320	32.0	32	106	186	6	0.70
E2752350	EQ752350	35.0	32	106	186	6	0.70
E2752380	EQ752380	38.0	32	125	217	6	0.70
E2752938	EQ752938	38.0	40	125	217	6	0.70
E2752400	EQ752400	40.0	32	125	217	6	0.88
E2752940	EQ752940	40.0	40	125	217	6	0.88

- ▶ Other shank design on your request.
- ▶ TiN and TiCN Coatings are available on your request.

**Tolerances according to DIN 7160 & 7161**

	Tolerance range in $\mu\text{m}$					
	Nominal-Diameter in mm					
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50
js12	±50	±60	±75	±90	±105	±125
h6	0	0	0	0	0	0
	-6	-8	-9	-11	-13	-16



◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloy steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21		
HRC	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S						H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
VDI 3323	15	30	25	38	34	15	30	25	38	34	200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
HRC	60	100	75	90	130	110	90	100														
HB	60	100	75	90	130	110	90	100														
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎




**RECOMMENDED CUTTING CONDITIONS**  
**EMPFOHLENE SCHNEIDPARAMETER**

**E2535, E2492** SERIES 2 FLUTE BALL NOSE

Vc = m/min.  
fz = mm/tooth  
RPM = rev/min.  
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)											
						3.0	4.0	6.0	8.0	10.0	12.0	16.0	20.0	25.0			
P	1	Non-alloy steel	0.7D	0.3D	Vc	40	40	40	40	40	40	40	40	40	40	40	
					fz	0.011	0.018	0.031	0.05	0.069	0.085	0.094	0.117	0.13			
					RPM	4244	3183	2122	1592	1273	1061	796	637	509			
	2		0.7D	0.3D	Vc	30	30	30	30	30	30	30	30	30	30	30	
					fz	0.01	0.017	0.026	0.044	0.06	0.066	0.083	0.085	0.088			
					RPM	3183	2387	1592	1194	955	796	597	477	382			
	3-4		0.7D	0.3D	Vc	20	20	20	20	20	15	20	20	20	15		
					fz	0.008	0.013	0.023	0.036	0.054	0.061	0.079	0.083	0.091			
					RPM	2122	1592	1061	796	637	398	398	318	191			
	5		0.7D	0.3D	Vc	15	15	15	15	15	10	15	15	15	15		
					fz	0.007	0.013	0.018	0.03	0.044	0.055	0.07	0.088	0.094			
RPM		1592			1194	796	597	477	265	298	239	191					
6	0.7D	0.3D	Vc	30	30	30	30	30	30	30	30	30	30				
			fz	0.01	0.017	0.026	0.044	0.06	0.066	0.083	0.085	0.088					
			RPM	3183	2387	1592	1194	955	796	597	477	382					
7	0.7D	0.3D	Vc	20	20	20	20	20	15	20	20	15					
			fz	0.008	0.013	0.023	0.036	0.054	0.061	0.079	0.083	0.091					
			RPM	2122	1592	1061	796	637	398	398	318	191					
8-9	0.7D	0.3D	Vc	15	15	15	15	15	10	15	15	15					
			fz	0.007	0.013	0.018	0.03	0.044	0.055	0.07	0.088	0.094					
			RPM	1592	1194	796	597	477	265	298	239	191					
10	0.7D	0.3D	Vc	30	30	30	30	30	30	30	30	30					
			fz	0.01	0.017	0.026	0.044	0.06	0.066	0.083	0.085	0.088					
			RPM	3183	2387	1592	1194	955	796	597	477	382					
11.1	0.7D	0.3D	Vc	15	15	15	15	15	10	15	15	15					
			fz	0.007	0.013	0.018	0.03	0.044	0.055	0.07	0.088	0.094					
			RPM	1592	1194	796	597	477	265	298	239	191					
N	21-22	Aluminum-wrought alloy	0.7D	0.3D	Vc	105	100	105	100	100	95	100	100	100			
					fz	0.01	0.016	0.025	0.044	0.056	0.068	0.075	0.088	0.096			
					RPM	11141	7958	5570	3979	3183	2520	1989	1592	1273			
23-24	Aluminum-cast, alloyed	0.7D	0.3D	Vc	68	65	68	65	65	62	65	65	65				
				fz	0.01	0.016	0.025	0.044	0.056	0.068	0.075	0.088	0.096				
				RPM	7215	5173	3608	2586	2069	1645	1293	1035	828				

※The FEED, in long & extra long types, should be reduced by around 50%




**EQ535, EQ492 SERIES 2 FLUTE BALL NOSE TiAlN COATED**

Vc = m/min.  
fz = mm/tooth  
RPM = rev/min.  
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)										
						3.0	4.0	6.0	8.0	10.0	12.0	16.0	20.0	25.0		
P	1	Non-alloy steel	0.7D	0.3D	Vc	60	55	60	55	55	55	55	55	55	55	55
					fz	0.011	0.018	0.031	0.05	0.069	0.086	0.095	0.115	0.129		
					RPM	6366	4377	3183	2188	1751	1459	1094	875	700		
	2		Vc	45	40	45	45	45	45	45	45	45	45	45		
			fz	0.011	0.016	0.026	0.043	0.061	0.066	0.082	0.086	0.091				
			RPM	4775	3183	2387	1790	1432	1061	895	716	573				
	3-4		Vc	25	25	25	25	25	25	25	25	25	25	25		
			fz	0.007	0.013	0.023	0.035	0.053	0.058	0.075	0.088	0.092				
			RPM	2653	1989	1326	995	796	663	497	398	318				
	5		Vc	20	20	20	20	15	15	20	20	15				
			fz	0.008	0.013	0.018	0.029	0.045	0.056	0.071	0.083	0.1				
RPM		2122	1592	1061	796	477	398	318	191	191						
6	Vc	45	40	45	45	45	45	45	45	45	45	45				
	fz	0.011	0.016	0.026	0.043	0.061	0.066	0.082	0.086	0.091						
	RPM	4775	3183	2387	1790	1432	1061	895	716	573						
7	Vc	25	25	25	25	25	25	25	25	25	25	25				
	fz	0.007	0.013	0.023	0.035	0.053	0.058	0.075	0.088	0.092						
	RPM	2653	1989	1326	995	796	663	497	398	318						
8-9	Vc	20	20	20	20	15	15	20	20	15						
	fz	0.008	0.013	0.018	0.029	0.045	0.056	0.071	0.083	0.1						
	RPM	2122	1592	1061	796	477	398	318	191	191						
10	Vc	45	40	45	45	45	45	45	45	45	45	45				
	fz	0.011	0.016	0.026	0.043	0.061	0.066	0.082	0.086	0.091						
	RPM	4775	3183	2387	1790	1432	1061	895	716	573						
11.1	Vc	20	20	20	20	15	15	20	20	15						
	fz	0.008	0.013	0.018	0.029	0.045	0.056	0.071	0.083	0.1						
	RPM	2122	1592	1061	796	477	398	318	191	191						
N	21-22	Aluminum-wrought alloy	0.7D	0.3D	Vc	145	140	150	140	140	140	140	140			
					fz	0.01	0.016	0.025	0.044	0.056	0.068	0.075	0.087	0.097		
					RPM	15385	11141	7958	5570	4456	3448	2785	2228	1783		
23-24	Aluminum-cast, alloyed	0.7D	0.3D	Vc	94	91	98	91	91	91	91	91				
				fz	0.01	0.016	0.025	0.044	0.056	0.068	0.075	0.087	0.097			
				RPM	9974	7242	5199	3621	2897	2255	1810	1448	1159			


※The FEED, in long & extra long types, should be reduced by around 50%



**EL612 SERIES 1 FLUTE - SLOTTING**


Vc = m/min.  
fz = mm/tooth  
RPM = rev/min.  
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)						
						3.0	4.0	5.0	6.0	7.0	8.0	10.0
N	21-22	Aluminum-wrought alloy	1.0D	0.5D (~Ø:0.2D)	Vc	188	226	220	207	220	214	220
					fz	0.055	0.053	0.054	0.055	0.055	0.053	0.054
23-24	Aluminum-cast, alloyed	1.0D	0.5D (~Ø:0.2D)	Vc	122	147	143	135	143	139	143	
				fz	0.055	0.053	0.054	0.055	0.055	0.053	0.054	




**E2464, E2509 SERIES 2 FLUTE - SLOTTING**

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)									
						3.0	6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.0	
N	21-22	Aluminum-wrought alloy	1.0D	0.5D	Vc	75	130	150	155	190	155	175	130	145	
					fz	0.035	0.05	0.071	0.12	0.12	0.177	0.177	0.283	0.283	
23-24	Aluminum-cast, alloyed	1.0D	0.5D	Vc	57	690	5968	4934	5040	3524	3482	2299	2308		
				fz	49	85	98	101	124	101	114	85	94		



**E2464, E2509 SERIES 2 FLUTE - SITE CUTTING**

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)									
						3.0	6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.0	
N	21-22	Aluminum-wrought alloy	Ø3~Ø10-0.25D Ø12~Ø20-0.5D	1.0D	Vc	75	130	150	155	190	155	175	130	145	
					fz	0.046	0.064	0.092	0.15	0.15	0.229	0.229	0.37	0.37	
23-24	Aluminum-cast, alloyed	Ø3~Ø10-0.25D Ø12~Ø20-0.5D	1.0D	Vc	49	85	98	101	124	101	114	85	94		
				fz	0.046	0.064	0.092	0.15	0.15	0.229	0.229	0.37	0.37		




**E2570, E2571, E2510 SERIES 2 FLUTE - SLOTTING**

Vc = m/min.  
fz = mm/tooth  
RPM = rev./min.  
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)							
						2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0
P	1	Non-alloy steel	1.0D	0.5D	Vc	35	35	35	35	35	35	35	35
					fz	0.004	0.008	0.013	0.02	0.025	0.036	0.045	0.061
					RPM	5570	3714	2785	2228	1857	1393	1114	928
	FEED		45	59	72	89	93	100	100	113			
	2		1.0D	0.5D	Vc	30	30	30	30	30	30	30	30
					fz	0.003	0.007	0.013	0.019	0.025	0.041	0.05	0.063
					RPM	4775	3183	2387	1910	1592	1194	955	796
	FEED		29	45	62	73	80	98	95	100			
	3-4		1.0D	0.5D	Vc	25	25	25	25	25	25	25	25
					fz	0.004	0.008	0.013	0.019	0.025	0.039	0.05	0.063
					RPM	3979	2653	1989	1592	1326	995	796	663
FEED	32	42	52	60	66	78	80	84					
5	1.0D	0.5D	Vc	15	15	15	15	15	15	15	15		
			fz	0.003	0.006	0.014	0.019	0.025	0.04	0.05	0.063		
			RPM	2387	1592	1194	955	796	597	477	398		
FEED	14	19	33	36	40	48	48	50					
6	1.0D	Low alloy steel	0.5D	Vc	30	30	30	30	30	30	30	30	
				fz	0.003	0.007	0.013	0.019	0.025	0.041	0.05	0.063	
				RPM	4775	3183	2387	1910	1592	1194	955	796	
FEED	29		45	62	73	80	98	95	100				
7	1.0D		0.5D	Vc	25	25	25	25	25	25	25	25	
				fz	0.004	0.008	0.013	0.019	0.025	0.039	0.05	0.063	
				RPM	3979	2653	1989	1592	1326	995	796	663	
FEED	32		42	52	60	66	78	80	84				
8-9	1.0D		0.5D	Vc	15	15	15	15	15	15	15	15	
				fz	0.003	0.006	0.014	0.019	0.025	0.04	0.05	0.063	
				RPM	2387	1592	1194	955	796	597	477	398	
FEED	14	19	33	36	40	48	48	50					
10	1.0D	High alloyed steel, and tool steel	0.5D	Vc	30	30	30	30	30	30	30	30	
				fz	0.003	0.007	0.013	0.019	0.025	0.041	0.05	0.063	
				RPM	4775	3183	2387	1910	1592	1194	955	796	
FEED	29		45	62	73	80	98	95	100				
11.1	1.0D		0.5D	Vc	15	15	15	15	15	15	15	15	
				fz	0.003	0.006	0.014	0.019	0.025	0.04	0.05	0.063	
				RPM	2387	1592	1194	955	796	597	477	398	
FEED	14		19	33	36	40	48	48	50				
21-22	1.0D		Aluminum-wrought alloy	0.5D	Vc	75	105	100	100	105	100	95	95
					fz	0.007	0.011	0.018	0.025	0.028	0.049	0.065	0.076
					RPM	11937	11141	7958	6366	5570	3979	3024	2520
FEED	167	245	286	318	312	390	393	383					
23-24	1.0D	Aluminum-cast, alloyed	0.5D	Vc	49	68	65	65	68	65	62	62	
				fz	0.007	0.011	0.018	0.025	0.028	0.049	0.065	0.076	
				RPM	7799	7215	5173	4138	3608	2586	1974	1645	
FEED	109	159	186	207	202	253	257	250					

※The FEED, in long & extra long types, should be reduced by around 50%


▶ NEXT PAGE



**E2570, E2571, E2510 SERIES 2 FLUTE - SLOTTING**

Vc = m/min.  
fz = mm/tooth  
RPM = rev./min.  
FEED = mm/min.

VDI 3323	Parameter	Diameter (Ø)										
		14.0	16.0	18.0	20.0	22.0	25.0	28.0	30.0	32.0	36.0	40.0
1	Vc	35	35	35	35	35	35	35	35	35	35	35
	fz	0.069	0.079	0.079	0.089	0.1	0.1	0.1	0.1	0.1	0.097	0.107
	RPM	796	696	619	557	506	446	398	371	348	309	279
	FEED	110	110	98	99	101	89	80	74	70	60	60
2	Vc	30	30	30	30	30	30	30	30	30	30	30
	fz	0.064	0.08	0.09	0.1	0.1	0.1	0.097	0.098	0.1	0.098	0.114
	RPM	682	597	531	477	434	382	341	318	298	265	239
	FEED	87	95	95	95	87	76	68	62	58	53	54
3-4	Vc	25	25	25	25	25	25	25	25	25	25	25
	fz	0.071	0.078	0.088	0.088	0.1	0.097	0.098	0.1	0.102	0.1	0.111
	RPM	568	497	442	398	362	318	284	265	199	221	199
	FEED	81	78	78	70	72	62	56	53	41	44	44
5	Vc	15	15	15	15	15	15	15	15	15	15	15
	fz	0.071	0.08	0.09	0.102	0.102	0.097	0.094	0.094	0.107	0.104	0.114
	RPM	341	298	265	239	217	191	171	159	149	133	119
	FEED	48	48	48	49	44	37	32	30	32	28	27
6	Vc	30	30	30	30	30	30	30	30	30	30	30
	fz	0.064	0.08	0.09	0.1	0.1	0.1	0.097	0.098	0.1	0.114	0.114
	RPM	682	597	531	477	434	382	341	318	298	265	239
	FEED	87	95	95	95	87	76	68	62	58	53	54
7	Vc	25	25	25	25	25	25	25	25	25	25	25
	fz	0.071	0.078	0.088	0.088	0.1	0.097	0.098	0.1	0.102	0.1	0.111
	RPM	568	497	442	398	362	318	284	265	199	221	199
	FEED	81	78	78	70	72	62	56	53	41	44	44
8-9	Vc	15	15	15	15	15	15	15	15	15	15	15
	fz	0.071	0.08	0.09	0.102	0.102	0.097	0.094	0.094	0.107	0.104	0.114
	RPM	341	298	265	239	217	191	171	159	149	133	119
	FEED	48	48	48	49	44	37	32	30	32	28	27
10	Vc	30	30	30	30	30	30	30	30	30	30	30
	fz	0.064	0.08	0.09	0.1	0.1	0.1	0.097	0.098	0.1	0.114	0.114
	RPM	682	597	531	477	434	382	341	318	298	265	239
	FEED	87	95	95	95	87	76	68	62	58	53	54
11.1	Vc	15	15	15	15	15	15	15	15	15	15	15
	fz	0.071	0.08	0.09	0.102	0.102	0.097	0.094	0.094	0.107	0.104	0.114
	RPM	341	298	265	239	217	191	171	159	149	133	119
	FEED	48	48	48	49	44	37	32	30	32	28	27
21-22	Vc	95	100	100	100	95	95	95	95	105	100	100
	fz	0.08	0.088	0.097	0.1	0.107	0.117	0.123	0.123	0.12	0.122	0.125
	RPM	2160	1989	1768	1592	1375	1210	1080	1114	995	884	796
	FEED	346	350	343	318	294	283	266	274	239	216	199
23-24	Vc	62	65	65	65	62	62	68	65	65	65	65
	fz	0.08	0.088	0.097	0.1	0.107	0.117	0.123	0.123	0.12	0.122	0.125
	RPM	1410	1293	1149	1035	897	789	705	722	647	575	517
	FEED	226	228	223	207	192	185	173	177	155	140	129





**EQ570, EQ571, EQ510 SERIES 2 FLUTE TiAlN COATED - SLOTTING**

Vc = m/min.  
fz = mm/tooth  
RPM = rev./min.  
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)								
						2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0	
P	1	Non-alloy steel	1.0D	0.5D	Vc	50	45	50	50	45	50	50	45	
					fz	0.004	0.008	0.013	0.02	0.025	0.036	0.045	0.062	
					RPM	7958	4775	3979	3183	2387	1989	1592	1194	
	2		Vc	40	40	40	40	40	40	40	40			
			fz	0.003	0.007	0.012	0.02	0.024	0.04	0.05	0.064			
			RPM	6366	4244	3183	2546	2122	1592	1273	1061			
	3-4		Vc	35	35	30	35	30	30	35	35			
			fz	0.004	0.008	0.013	0.019	0.025	0.04	0.05	0.061			
			RPM	5570	3714	2387	2228	1592	1194	1114	928			
	5		Vc	20	20	20	20	20	20	20	20			
			fz	0.003	0.007	0.013	0.02	0.025	0.041	0.05	0.064			
RPM		3183	2122	1592	1273	1061	796	637	531					
6	Vc	40	40	40	40	40	40	40	40					
	fz	0.003	0.007	0.012	0.02	0.024	0.04	0.05	0.064					
	RPM	6366	4244	3183	2546	2122	1592	1273	1061					
7	Vc	35	35	30	35	30	30	35	35					
	fz	0.004	0.008	0.013	0.019	0.025	0.04	0.05	0.061					
	RPM	5570	3714	2387	2228	1592	1194	1114	928					
8-9	Vc	20	20	20	20	20	20	20	20					
	fz	0.003	0.007	0.013	0.02	0.025	0.041	0.05	0.064					
	RPM	3183	2122	1592	1273	1061	796	637	531					
10	Vc	40	40	40	40	40	40	40	40					
	fz	0.003	0.007	0.012	0.02	0.024	0.04	0.05	0.064					
	RPM	6366	4244	3183	2546	2122	1592	1273	1061					
11.1	Vc	20	20	20	20	20	20	20	20					
	fz	0.003	0.007	0.013	0.02	0.025	0.041	0.05	0.064					
	RPM	3183	2122	1592	1273	1061	796	637	531					
N	21-22	Aluminum-wrought alloy	1.0D	0.5D	Vc	105	145	140	140	150	140	135	130	
					fz	0.007	0.011	0.018	0.025	0.028	0.049	0.064	0.076	
					RPM	16711	15385	11141	8913	7958	5570	4297	3448	
	23-24		Aluminum-cast, alloyed	1.0D	0.5D	Vc	68	94	91	91	98	91	88	85
						fz	0.007	0.011	0.018	0.025	0.028	0.049	0.064	0.076
						RPM	10823	9974	7242	5793	5199	3621	2801	2255
FEED	152	219		261	290	291	355	359	343					

※The FEED, in long & extra long types, should be reduced by around 50%

▶ NEXT PAGE



**EQ570, EQ571, EQ510 SERIES 2 FLUTE TiAlN COATED - SLOTTING**

Vc = m/min.  
fz = mm/tooth  
RPM = rev./min.  
FEED = mm/min.

VDI 3323	Parameter	Diameter (Ø)										
		14.0	16.0	18.0	20.0	22.0	25.0	28.0	30.0	32.0	36.0	40.0
1	Vc	50	50	50	50	50	50	50	45	50	50	50
	fz	0.07	0.078	0.078	0.088	0.1	0.096	0.1	0.1	0.1	0.094	0.106
	RPM	1137	995	884	796	723	637	568	477	442	398	318
2	Vc	45	40	40	40	45	45	45	40	40	40	40
	fz	0.063	0.078	0.089	0.096	0.096	0.1	0.1	0.094	0.094	0.1	0.117
	RPM	1023	796	707	637	651	573	512	424	398	354	318
3-4	Vc	35	35	30	35	35	35	35	30	35	30	30
	fz	0.069	0.077	0.091	0.091	0.1	0.094	0.094	0.1	0.108	0.092	0.11
	RPM	796	696	531	557	506	446	398	371	298	309	239
5	Vc	20	20	20	20	20	20	20	20	20	15	20
	fz	0.07	0.081	0.093	0.108	0.108	0.1	0.1	0.1	0.1	0.117	0.117
	RPM	455	398	354	318	289	255	227	199	133	159	159
6	Vc	45	40	40	40	45	45	45	40	40	40	40
	fz	0.063	0.078	0.089	0.096	0.096	0.1	0.1	0.094	0.094	0.1	0.117
	RPM	1023	796	707	637	651	573	512	424	398	354	318
7	Vc	35	35	30	35	35	35	35	30	35	30	30
	fz	0.069	0.077	0.091	0.091	0.1	0.094	0.094	0.1	0.108	0.092	0.11
	RPM	796	696	531	557	506	446	398	371	298	309	239
8-9	Vc	20	20	20	20	20	20	20	20	20	15	20
	fz	0.07	0.081	0.093	0.108	0.108	0.1	0.1	0.1	0.1	0.117	0.117
	RPM	455	398	354	318	289	255	227	199	133	159	159
10	Vc	45	40	40	40	45	45	45	40	40	40	40
	fz	0.063	0.078	0.089	0.096	0.096	0.1	0.1	0.094	0.094	0.1	0.117
	RPM	1023	796	707	637	651	573	512	424	398	354	318
11.1	Vc	20	20	20	20	20	20	20	20	20	15	20
	fz	0.07	0.081	0.093	0.108	0.108	0.1	0.1	0.1	0.1	0.117	0.117
	RPM	455	398	354	318	289	255	227	199	133	159	159
21-22	Vc	135	140	140	140	135	135	135	145	140	140	140
	fz	0.079	0.088	0.098	0.1	0.108	0.115	0.123	0.123	0.12	0.124	0.127
	RPM	3069	2785	2476	2228	1953	1719	1535	1538	1393	1238	1114
23-24	Vc	88	91	91	91	88	88	88	94	91	91	91
	fz	0.079	0.088	0.098	0.1	0.108	0.115	0.123	0.123	0.12	0.124	0.127
	RPM	2001	1810	1609	1448	1273	1120	1000	997	905	805	724
FEED	316	319	315	290	275	258	246	245	217	200	184	

**E2572, E2573, E2516, E2553, E2554** SERIES


**3 FLUTE - SLOTTING**

Vc = m/min.  
fz = mm/tooth  
RPM = rev/min.  
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)							
						2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0
P	1	Non-alloy steel	1.0D	0.5D	Vc	35	35	35	35	35	35	35	35
					fz	0.002	0.005	0.007	0.012	0.015	0.021	0.027	0.037
					RPM	5570	3714	2785	2228	1857	1393	1114	928
	2		Vc	30	30	30	30	30	30	30	30		
			fz	0.002	0.004	0.007	0.01	0.014	0.021	0.026	0.033		
			RPM	4775	3183	2387	1910	1592	1194	955	796		
	3-4		Vc	25	25	25	25	25	25	25	25		
			fz	0.002	0.003	0.006	0.008	0.011	0.019	0.023	0.029		
			RPM	3979	2653	1989	1592	1326	995	796	663		
	5		Vc	15	15	15	15	15	15	15	15		
			fz	0.002	0.003	0.006	0.007	0.01	0.018	0.022	0.029		
RPM		2387	1592	1194	955	796	597	477	398				
6	Vc	30	30	30	30	30	30	30	30				
	fz	0.002	0.004	0.007	0.01	0.014	0.021	0.026	0.033				
	RPM	4775	3183	2387	1910	1592	1194	955	796				
7	Vc	25	25	25	25	25	25	25	25				
	fz	0.002	0.003	0.006	0.008	0.011	0.019	0.023	0.029				
	RPM	3979	2653	1989	1592	1326	995	796	663				
8-9	Vc	15	15	15	15	15	15	15	15				
	fz	0.002	0.003	0.006	0.007	0.01	0.018	0.022	0.029				
	RPM	2387	1592	1194	955	796	597	477	398				
10	Vc	30	30	30	30	30	30	30	30				
	fz	0.002	0.004	0.007	0.01	0.014	0.021	0.026	0.033				
	RPM	4775	3183	2387	1910	1592	1194	955	796				
11.1	Vc	15	15	15	15	15	15	15	15				
	fz	0.002	0.003	0.006	0.007	0.01	0.018	0.022	0.029				
	RPM	2387	1592	1194	955	796	597	477	398				
N	21-22	Aluminum-wrought alloy	1.0D	0.5D	Vc	75	105	100	100	105	100	95	95
					fz	0.003	0.005	0.008	0.011	0.013	0.022	0.029	0.035
					RPM	11937	11141	7958	6366	5570	3979	3024	2520
23-24	Aluminum-cast, alloyed	1.0D	0.5D	Vc	49	68	65	65	68	65	62	62	
				fz	0.003	0.005	0.008	0.011	0.013	0.022	0.029	0.035	
				RPM	7799	7215	5173	4138	3608	2586	1974	1645	

※The FEED, in long & extra long types, should be reduced by around 50%

▶ NEXT PAGE




**E2572, E2573, E2516, E2553, E2554** SERIES

**3 FLUTE - SLOTTING**

Vc = m/min.  
fz = mm/tooth  
RPM = rev/min.  
FEED = mm/min.

VDI 3323	Parameter	Diameter (Ø)											
		14.0	16.0	18.0	20.0	22.0	25.0	28.0	30.0	32.0	35.0	36.0	40.0
1	Vc	35	35	35	35	35	35	35	35	35	35	35	35
	fz	0.042	0.048	0.048	0.054	0.06	0.059	0.058	0.057	0.057	0.057	0.059	0.065
	RPM	796	696	619	557	506	446	398	371	348	318	309	279
2	Vc	30	30	30	30	30	30	30	30	30	30	30	30
	fz	0.033	0.042	0.047	0.052	0.052	0.054	0.052	0.054	0.054	0.051	0.053	0.061
	RPM	682	597	531	477	434	382	341	318	298	273	265	239
3-4	Vc	25	25	25	25	25	25	25	25	25	25	25	25
	fz	0.033	0.037	0.042	0.042	0.048	0.043	0.042	0.04	0.045	0.04	0.042	0.046
	RPM	568	497	442	398	362	318	284	265	199	227	221	199
5	Vc	15	15	15	15	15	15	15	15	15	15	15	15
	fz	0.033	0.036	0.04	0.045	0.045	0.037	0.042	0.042	0.048	0.038	0.042	0.045
	RPM	341	298	265	239	217	191	171	159	149	136	133	119
6	Vc	30	30	30	30	30	30	30	30	30	30	30	30
	fz	0.033	0.042	0.047	0.052	0.052	0.054	0.052	0.054	0.054	0.051	0.053	0.061
	RPM	682	597	531	477	434	382	341	318	298	273	265	239
7	Vc	25	25	25	25	25	25	25	25	25	25	25	25
	fz	0.033	0.037	0.042	0.042	0.048	0.043	0.042	0.04	0.045	0.04	0.042	0.046
	RPM	568	497	442	398	362	318	284	265	199	227	221	199
8-9	Vc	15	15	15	15	15	15	15	15	15	15	15	15
	fz	0.033	0.036	0.04	0.045	0.045	0.037	0.042	0.042	0.048	0.038	0.042	0.045
	RPM	341	298	265	239	217	191	171	159	149	136	133	119
10	Vc	30	30	30	30	30	30	30	30	30	30	30	30
	fz	0.033	0.042	0.047	0.052	0.052	0.054	0.052	0.054	0.054	0.051	0.053	0.061
	RPM	682	597	531	477	434	382	341	318	298	273	265	239
11.1	Vc	15	15	15	15	15	15	15	15	15	15	15	15
	fz	0.033	0.036	0.04	0.045	0.045	0.037	0.042	0.042	0.048	0.038	0.042	0.045
	RPM	341	298	265	239	217	191	171	159	149	136	133	119
21-22	Vc	95	100	100	100	95	95	95	105	100	105	100	100
	fz	0.036	0.04	0.044	0.046	0.048	0.053	0.055	0.055	0.053	0.053	0.056	0.054
	RPM	2160	1989	1768	1592	1375	1210	1080	1114	995	955	884	796
23-24	Vc	62	65	65	65	62	62	62	68	65	68	65	65
	fz	0.036	0.04	0.044	0.046	0.048	0.053	0.055	0.055	0.053	0.053	0.056	0.054
	RPM	1410	1293	1149	1035	897	789	705	722	647	618	575	517



**E2572, E2573, E2516, E2553, E2554 SERIES**


**3 FLUTE - SIDE CUTTING**

Vc = m/min.  
fz = mm/tooth  
RPM = rev./min.  
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)							
						2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0
P	1	Non-alloy steel	0.1D	1.5D	Vc	35	35	35	35	35	35	35	35
					fz	0.004	0.008	0.013	0.02	0.025	0.036	0.045	0.061
					RPM	5570	3714	2785	2228	1857	1393	1114	928
	2		Vc	30	30	30	30	30	30	30	30		
			fz	0.003	0.006	0.011	0.018	0.023	0.036	0.044	0.056		
			RPM	4775	3183	2387	1910	1592	1194	955	796		
	3-4		Vc	25	25	25	25	25	25	25	25		
			fz	0.003	0.006	0.009	0.014	0.018	0.03	0.038	0.048		
			RPM	3979	2653	1989	1592	1326	995	796	663		
	5		Vc	15	15	15	15	15	15	15	15		
			fz	0.002	0.004	0.009	0.013	0.019	0.03	0.037	0.046		
RPM		2387	1592	1194	955	796	597	477	398				
6	Vc	30	30	30	30	30	30	30	30				
	fz	0.003	0.006	0.011	0.018	0.023	0.036	0.044	0.056				
	RPM	4775	3183	2387	1910	1592	1194	955	796				
7	Vc	25	25	25	25	25	25	25	25				
	fz	0.003	0.006	0.009	0.014	0.018	0.03	0.038	0.048				
	RPM	3979	2653	1989	1592	1326	995	796	663				
8-9	Vc	15	15	15	15	15	15	15	15				
	fz	0.002	0.004	0.009	0.013	0.019	0.03	0.037	0.046				
	RPM	2387	1592	1194	955	796	597	477	398				
10	Vc	30	30	30	30	30	30	30	30				
	fz	0.003	0.006	0.011	0.018	0.023	0.036	0.044	0.056				
	RPM	4775	3183	2387	1910	1592	1194	955	796				
11.1	Vc	15	15	15	15	15	15	15	15				
	fz	0.002	0.004	0.009	0.013	0.019	0.03	0.037	0.046				
	RPM	2387	1592	1194	955	796	597	477	398				
N	21-22	Aluminum-wrought alloy	0.1D	1.5D	Vc	75	105	100	100	105	100	95	95
					fz	0.005	0.008	0.014	0.019	0.021	0.037	0.048	0.057
					RPM	11937	11141	7958	6366	5570	3979	3024	2520
	23-24		Vc	49	68	65	65	68	65	62	62		
			fz	0.005	0.008	0.014	0.019	0.021	0.037	0.048	0.057		
			RPM	7799	7215	5173	4138	3608	2586	1974	1645		
N	21-22	Aluminum-cast, alloyed	0.1D	1.5D	Vc	49	68	65	65	68	65	62	62
					fz	0.005	0.008	0.014	0.019	0.021	0.037	0.048	0.057
					RPM	7799	7215	5173	4138	3608	2586	1974	1645
	23-24		Vc	117	173	217	236	227	287	284	281		
			fz	0.005	0.008	0.014	0.019	0.021	0.037	0.048	0.057		
			RPM	7799	7215	5173	4138	3608	2586	1974	1645		

※The FEED, in long & extra long types, should be reduced by around 50%

▶ NEXT PAGE




**E2572, E2573, E2516, E2553, E2554 SERIES**

**3 FLUTE - SIDE CUTTING**

Vc = m/min.  
fz = mm/tooth  
RPM = rev./min.  
FEED = mm/min.

VDI 3323	Parameter	Diameter (Ø)											
		14.0	16.0	18.0	20.0	22.0	25.0	28.0	30.0	32.0	35.0	36.0	40.0
1	Vc	35	35	35	35	35	35	35	35	35	35	35	35
	fz	0.069	0.079	0.079	0.089	0.1	0.1	0.1	0.1	0.1	0.099	0.097	0.107
	RPM	796	696	619	557	506	446	398	371	348	318	309	279
	FEED	165	165	147	149	152	134	119	111	104	95	90	89
2	Vc	30	30	30	30	30	30	30	30	30	30	30	30
	fz	0.057	0.071	0.08	0.089	0.089	0.092	0.09	0.086	0.089	0.083	0.087	0.098
	RPM	682	597	531	477	434	382	341	318	298	273	265	239
	FEED	117	127	127	127	116	105	92	82	80	68	69	70
3-4	Vc	25	25	25	25	25	25	25	25	25	25	25	25
	fz	0.054	0.059	0.067	0.067	0.076	0.076	0.071	0.073	0.076	0.071	0.075	0.083
	RPM	568	497	442	398	362	318	284	265	199	227	221	199
	FEED	92	88	89	80	82	67	61	58	45	48	50	50
5	Vc	15	15	15	15	15	15	15	15	15	15	15	15
	fz	0.052	0.06	0.067	0.076	0.076	0.065	0.063	0.063	0.071	0.064	0.069	0.076
	RPM	341	298	265	239	217	191	171	159	149	136	133	119
	FEED	53	54	53	54	49	37	32	30	32	26	27	27
6	Vc	30	30	30	30	30	30	30	30	30	30	30	30
	fz	0.057	0.071	0.08	0.089	0.089	0.092	0.09	0.086	0.089	0.083	0.087	0.098
	RPM	682	597	531	477	434	382	341	318	298	273	265	239
	FEED	117	127	127	127	116	105	92	82	80	68	69	70
7	Vc	25	25	25	25	25	25	25	25	25	25	25	25
	fz	0.054	0.059	0.067	0.067	0.076	0.076	0.071	0.073	0.076	0.071	0.075	0.083
	RPM	568	497	442	398	362	318	284	265	199	227	221	199
	FEED	92	88	89	80	82	67	61	58	45	48	50	50
8-9	Vc	15	15	15	15	15	15	15	15	15	15	15	15
	fz	0.052	0.06	0.067	0.076	0.076	0.065	0.063	0.063	0.071	0.064	0.069	0.076
	RPM	341	298	265	239	217	191	171	159	149	136	133	119
	FEED	53	54	53	54	49	37	32	30	32	26	27	27
10	Vc	30	30	30	30	30	30	30	30	30	30	30	30
	fz	0.057	0.071	0.08	0.089	0.089	0.092	0.09	0.086	0.089	0.083	0.087	0.098
	RPM	682	597	531	477	434	382	341	318	298	273	265	239
	FEED	117	127	127	127	116	105	92	82	80	68	69	70
11.1	Vc	15	15	15	15	15	15	15	15	15	15	15	15
	fz	0.052	0.06	0.067	0.076	0.076	0.065	0.063	0.063	0.071	0.064	0.069	0.076
	RPM	341	298	265	239	217	191	171	159	149	136	133	119
	FEED	53	54	53	54	49	37	32	30	32	26	27	27
21-22	Vc	95	100	100	100	95	95	95	95	105	100	100	100
	fz	0.061	0.067	0.074	0.075	0.081	0.089	0.091	0.091	0.09	0.091	0.093	0.092
	RPM	2160	1989	1768	1592	1375	1210	1080	1114	995	884	796	720
	FEED	395	400	393	358	334	323	295	304	269	261	247	220
23-24	Vc	62	65	65	65	62	62	62	62	68	65	65	65
	fz	0.061	0.067	0.074	0.075	0.081	0.089	0.091	0.091	0.09	0.091	0.093	0.092
	RPM	1410	1293	1149	1035	897	789	705	722	647	618	575	517
	FEED	258	260	255	233	218	211	192	197	175	169	160	143



**EQ572, EQ573, EQ516, EQ553, EQ554 SERIES**


**3 FLUTE TiAlN COATED - SLOTTING**

Vc = m/min.  
fz = mm/tooth  
RPM = rev./min.  
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)							
						2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0
P	1	Non-alloy steel	1.0D	0.5D	Vc	50	45	50	50	45	50	45	50
					fz	0.002	0.005	0.007	0.012	0.015	0.021	0.028	0.036
					RPM	7958	4775	3979	3183	2387	1989	1432	1326
	2		Vc	40	40	40	40	40	40	40	40		
			fz	0.002	0.004	0.006	0.01	0.014	0.022	0.028	0.033		
			RPM	6366	4244	3183	2546	2122	1592	1273	1061		
	3-4		Vc	35	35	30	35	30	35	35	35		
			fz	0.002	0.003	0.005	0.008	0.011	0.018	0.023	0.028		
			RPM	5570	3714	2387	2228	1592	1393	1114	928		
	5		Vc	20	20	20	20	20	20	20	20		
			fz	0.002	0.003	0.007	0.008	0.011	0.017	0.021	0.03		
RPM		3183	2122	1592	1273	1061	796	637	531				
6	Vc	40	40	40	40	40	40	40	40				
	fz	0.002	0.004	0.006	0.01	0.014	0.022	0.028	0.033				
	RPM	6366	4244	3183	2546	2122	1592	1273	1061				
7	Vc	35	35	30	35	30	35	35	35				
	fz	0.002	0.003	0.005	0.008	0.011	0.018	0.023	0.028				
	RPM	5570	3714	2387	2228	1592	1393	1114	928				
8-9	Vc	20	20	20	20	20	20	20	20				
	fz	0.002	0.003	0.007	0.008	0.011	0.017	0.021	0.03				
	RPM	3183	2122	1592	1273	1061	796	637	531				
10	Vc	40	40	40	40	40	40	40	40				
	fz	0.002	0.004	0.006	0.01	0.014	0.022	0.028	0.033				
	RPM	6366	4244	3183	2546	2122	1592	1273	1061				
11.1	Vc	20	20	20	20	20	20	20	20				
	fz	0.002	0.003	0.007	0.008	0.011	0.017	0.021	0.03				
	RPM	3183	2122	1592	1273	1061	796	637	531				
21-22	Vc	105	145	140	140	145	140	135	130				
	fz	0.003	0.005	0.008	0.011	0.012	0.021	0.029	0.034				
	RPM	16711	15385	11141	8913	7692	5570	4297	3448				
23-24	Vc	68	94	91	91	94	91	88	85				
	fz	0.003	0.005	0.008	0.011	0.012	0.021	0.029	0.034				
	RPM	10823	9974	7242	5793	4987	3621	2801	2255				

※The FEED, in long & extra long types, should be reduced by around 50%

▶ NEXT PAGE




**EQ572, EQ573, EQ516, EQ553, EQ554 SERIES**

**3 FLUTE TiAlN COATED - SLOTTING**

Vc = m/min.  
fz = mm/tooth  
RPM = rev./min.  
FEED = mm/min.

VDI 3323	Parameter	Diameter (Ø)											
		14.0	16.0	18.0	20.0	22.0	25.0	28.0	30.0	32.0	35.0	36.0	40.0
1	Vc	50	50	50	50	50	50	50	45	50	50	50	50
	fz	0.042	0.048	0.047	0.053	0.06	0.058	0.06	0.058	0.059	0.058	0.064	0.064
	RPM	1137	995	884	796	723	637	568	477	497	455	442	398
2	Vc	45	40	40	40	45	45	40	40	40	40	40	40
	fz	0.034	0.043	0.048	0.053	0.053	0.054	0.051	0.054	0.056	0.056	0.052	0.059
	RPM	1023	796	707	637	651	573	512	424	398	364	354	318
3-4	Vc	35	30	30	35	35	35	35	30	30	30	30	30
	fz	0.032	0.037	0.042	0.042	0.048	0.043	0.043	0.038	0.043	0.04	0.042	0.047
	RPM	796	597	531	557	506	446	398	371	298	273	265	239
5	Vc	20	20	20	20	20	20	20	20	20	20	20	20
	fz	0.034	0.034	0.038	0.043	0.043	0.04	0.045	0.045	0.05	0.046	0.039	0.044
	RPM	455	398	354	318	289	255	227	212	199	182	177	159
6	Vc	45	40	40	40	45	45	40	40	40	40	40	40
	fz	0.034	0.043	0.048	0.053	0.053	0.054	0.051	0.054	0.056	0.056	0.052	0.059
	RPM	1023	796	707	637	651	573	512	424	398	364	354	318
7	Vc	35	30	30	35	35	35	35	30	30	30	30	30
	fz	0.032	0.037	0.042	0.042	0.048	0.043	0.043	0.038	0.043	0.04	0.042	0.047
	RPM	796	597	531	557	506	446	398	371	298	273	265	239
8-9	Vc	20	20	20	20	20	20	20	20	20	20	20	20
	fz	0.034	0.034	0.038	0.043	0.043	0.04	0.045	0.045	0.05	0.046	0.039	0.044
	RPM	455	398	354	318	289	255	227	212	199	182	177	159
10	Vc	45	40	40	40	45	45	40	40	40	40	40	40
	fz	0.034	0.043	0.048	0.053	0.053	0.054	0.051	0.054	0.056	0.056	0.052	0.059
	RPM	1023	796	707	637	651	573	512	424	398	364	354	318
11.1	Vc	20	20	20	20	20	20	20	20	20	20	20	20
	fz	0.034	0.034	0.038	0.043	0.043	0.04	0.045	0.045	0.05	0.046	0.039	0.044
	RPM	455	398	354	318	289	255	227	212	199	182	177	159
21-22	Vc	135	140	140	140	135	135	130	140	140	145	140	140
	fz	0.037	0.04	0.045	0.047	0.048	0.053	0.056	0.054	0.055	0.055	0.056	0.055
	RPM	3069	2785	2476	2228	1953	1719	1478	1485	1393	1319	1238	1114
23-24	Vc	88	91	91	91	88	88	85	91	91	94	91	91
	fz	0.037	0.04	0.045	0.047	0.048	0.053	0.056	0.056	0.054	0.055	0.056	0.055
	RPM	2001	1810	1609	1448	1273	1120	966	966	905	855	805	724





**EQ572, EQ573, EQ516, EQ553, EQ554 SERIES**



**3 FLUTE TiAlN COATED - SIDE CUTTING**

Vc = m/min.  
fz = mm/tooth  
RPM = rev./min.  
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)							
						2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0
P	1	Non-alloy steel	0.1D	1.5D	Vc	50	45	50	50	45	50	45	50
					fz	0.004	0.007	0.012	0.02	0.025	0.035	0.047	0.059
					RPM	7958	4775	3979	3183	2387	1989	1432	1326
	2		Vc	40	40	40	40	40	40	40	40		
			fz	0.003	0.006	0.011	0.017	0.023	0.038	0.044	0.058		
			RPM	6366	4244	3183	2546	2122	1592	1273	1061		
	3-4		Vc	35	35	30	35	30	35	35	35		
			fz	0.003	0.006	0.009	0.014	0.018	0.028	0.038	0.047		
			RPM	5570	3714	2387	2228	1592	1393	1114	928		
	5		Vc	20	20	20	20	20	20	20	20		
			fz	0.002	0.005	0.009	0.013	0.018	0.03	0.037	0.045		
RPM		3183	2122	1592	1273	1061	796	637	531				
6	Vc	40	40	40	40	40	40	40	40				
	fz	0.003	0.006	0.011	0.017	0.023	0.038	0.044	0.058				
	RPM	6366	4244	3183	2546	2122	1592	1273	1061				
7	Vc	35	35	30	35	30	35	35	35				
	fz	0.003	0.006	0.009	0.014	0.018	0.028	0.038	0.047				
	RPM	5570	3714	2387	2228	1592	1393	1114	928				
8-9	Vc	20	20	20	20	20	20	20	20				
	fz	0.002	0.005	0.009	0.013	0.018	0.03	0.037	0.045				
	RPM	3183	2122	1592	1273	1061	796	637	531				
10	Vc	40	40	40	40	40	40	40	40				
	fz	0.003	0.006	0.011	0.017	0.023	0.038	0.044	0.058				
	RPM	6366	4244	3183	2546	2122	1592	1273	1061				
11.1	Vc	20	20	20	20	20	20	20	20				
	fz	0.002	0.005	0.009	0.013	0.018	0.03	0.037	0.045				
	RPM	3183	2122	1592	1273	1061	796	637	531				
21-22	Vc	105	145	140	140	145	140	135	130				
	fz	0.005	0.008	0.014	0.019	0.021	0.037	0.049	0.057				
	RPM	16711	15385	11141	8913	7692	5570	4297	3448				
23-24	Vc	68	94	91	91	94	91	88	85				
	fz	0.005	0.008	0.014	0.019	0.021	0.037	0.049	0.057				
	RPM	10823	9974	7242	5793	4987	3621	2801	2255				
					FEED	162	239	304	330	314	402	412	386

※The FEED, in long & extra long types, should be reduced by around 50%

▶ NEXT PAGE



**EQ572, EQ573, EQ516, EQ553, EQ554 SERIES**

**3 FLUTE TiAlN COATED - SIDE CUTTING**

Vc = m/min.  
fz = mm/tooth  
RPM = rev./min.  
FEED = mm/min.

VDI 3323	Parameter	Diameter (Ø)											
		14.0	16.0	18.0	20.0	22.0	25.0	28.0	30.0	32.0	35.0	36.0	40.0
1	Vc	50	50	50	50	50	50	50	45	50	50	50	50
	fz	0.07	0.078	0.08	0.09	0.1	0.101	0.101	0.099	0.099	0.096	0.097	0.107
	RPM	1137	995	884	796	723	637	568	477	497	455	442	398
	FEED	239	233	212	215	217	193	172	142	148	131	129	128
2	Vc	45	40	40	40	45	45	45	40	40	40	40	40
	fz	0.058	0.073	0.081	0.09	0.09	0.092	0.088	0.085	0.09	0.088	0.086	0.097
	RPM	1023	796	707	637	651	573	512	424	398	364	354	318
	FEED	178	174	172	172	176	158	135	108	107	96	91	93
3-4	Vc	35	30	30	35	35	35	35	30	30	30	30	30
	fz	0.053	0.058	0.065	0.065	0.075	0.07	0.073	0.071	0.075	0.075	0.077	0.087
	RPM	796	597	531	557	506	446	398	371	298	273	265	239
	FEED	127	104	103	109	114	94	87	79	67	61	61	62
5	Vc	20	20	20	20	20	20	20	20	20	20	20	20
	fz	0.051	0.06	0.067	0.075	0.075	0.067	0.061	0.061	0.067	0.065	0.069	0.078
	RPM	455	398	354	318	289	255	227	212	199	182	177	159
	FEED	70	72	71	72	65	51	42	39	40	35	37	37
6	Vc	45	40	40	40	45	45	45	40	40	40	40	40
	fz	0.058	0.073	0.081	0.09	0.09	0.092	0.088	0.085	0.09	0.088	0.086	0.097
	RPM	1023	796	707	637	651	573	512	424	398	364	354	318
	FEED	178	174	172	172	176	158	135	108	107	96	91	93
7	Vc	35	30	30	35	35	35	35	30	30	30	30	30
	fz	0.053	0.058	0.065	0.065	0.075	0.07	0.073	0.071	0.075	0.075	0.077	0.087
	RPM	796	597	531	557	506	446	398	371	298	273	265	239
	FEED	127	104	103	109	114	94	87	79	67	61	61	62
8-9	Vc	20	20	20	20	20	20	20	20	20	20	20	20
	fz	0.051	0.06	0.067	0.075	0.075	0.067	0.061	0.061	0.067	0.065	0.069	0.078
	RPM	455	398	354	318	289	255	227	212	199	182	177	159
	FEED	70	72	71	72	65	51	42	39	40	35	37	37
10	Vc	45	40	40	40	45	45	45	40	40	40	40	40
	fz	0.058	0.073	0.081	0.09	0.09	0.092	0.088	0.085	0.09	0.088	0.086	0.097
	RPM	1023	796	707	637	651	573	512	424	398	364	354	318
	FEED	178	174	172	172	176	158	135	108	107	96	91	93
11.1	Vc	20	20	20	20	20	20	20	20	20	20	20	20
	fz	0.051	0.06	0.067	0.075	0.075	0.067	0.061	0.061	0.067	0.065	0.069	0.078
	RPM	455	398	354	318	289	255	227	212	199	182	177	159
	FEED	70	72	71	72	65	51	42	39	40	35	37	37
21-22	Vc	135	140	140	140	135	135	130	140	140	145	140	140
	fz	0.06	0.067	0.075	0.076	0.082	0.088	0.093	0.09	0.092	0.093	0.093	0.094
	RPM	3069	2785	2476	2228	1953	1719	1478	1485	1393	1319	1238	1114
	FEED	552	560	557	508	481	454	412	414	376	364	345	314
23-24	Vc	88	91	91	91	88	88	85	91	91	94	91	91
	fz	0.06	0.067	0.075	0.076	0.082	0.088	0.093	0.093	0.092	0.092	0.093	0.094
	RPM	2001	1810	1609	1448	1273	1120	966	966	905	855	805	724
	FEED	360	364	362	330	313	296	270	269	244	236	224	204


**E2574, E2597 SERIES 4 FLUTE - SIDE CUTTING**

Vc = m/min.  
fz = mm/tooth  
RPM = rev/min.  
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)						
						2.0	3.0	4.0	5.0	6.0	8.0	10.0
P	1	Non-alloy steel	0.1D	1.5D	Vc	35	35	35	35	35	35	35
					fz	0.004	0.008	0.013	0.02	0.025	0.036	0.045
					RPM	5570	3714	2785	2228	1857	1393	1114
	2		0.1D	1.5D	Vc	30	30	30	30	30	30	30
					fz	0.003	0.006	0.011	0.017	0.023	0.036	0.044
					RPM	4775	3183	2387	1910	1592	1194	955
	3-4		0.1D	1.5D	Vc	25	25	25	25	25	25	25
					fz	0.003	0.006	0.009	0.014	0.019	0.029	0.038
					RPM	3979	2653	1989	1592	1326	995	796
	5		0.1D	1.5D	Vc	15	15	15	15	15	15	15
					fz	0.002	0.005	0.01	0.014	0.019	0.029	0.036
RPM		2387			1592	1194	955	796	597	477		
6	0.1D	1.5D	Vc	30	30	30	30	30	30	30		
			fz	0.003	0.006	0.011	0.017	0.023	0.036	0.044		
			RPM	4775	3183	2387	1910	1592	1194	955		
7	0.1D	1.5D	Vc	25	25	25	25	25	25	25		
			fz	0.003	0.006	0.009	0.014	0.019	0.029	0.038		
			RPM	3979	2653	1989	1592	1326	995	796		
8-9	0.1D	1.5D	Vc	15	15	15	15	15	15	15		
			fz	0.002	0.005	0.01	0.014	0.019	0.029	0.036		
			RPM	2387	1592	1194	955	796	597	477		
10	0.1D	1.5D	Vc	30	30	30	30	30	30	30		
			fz	0.003	0.006	0.011	0.017	0.023	0.036	0.044		
			RPM	4775	3183	2387	1910	1592	1194	955		
11.1	0.1D	1.5D	Vc	15	15	15	15	15	15	15		
			fz	0.002	0.005	0.01	0.014	0.019	0.029	0.036		
			RPM	2387	1592	1194	955	796	597	477		
N	21-22	Aluminum-wrought alloy	0.1D	1.5D	Vc	75	105	100	100	105	100	95
					fz	0.005	0.009	0.014	0.019	0.021	0.036	0.048
					RPM	11937	11141	7958	6366	5570	3979	3024
23-24	Aluminum-cast, alloyed	0.1D	1.5D	Vc	49	68	65	65	68	65	62	
				fz	0.005	0.009	0.014	0.019	0.021	0.036	0.048	
				RPM	7799	7215	5173	4138	3608	2586	1974	

※The FEED, in long & extra long types, should be reduced by around 50%


▶ NEXT PAGE



**E2574, E2597 SERIES 4 FLUTE - SIDE CUTTING**

Vc = m/min.  
fz = mm/tooth  
RPM = rev/min.  
FEED = mm/min.

VDI 3323	Parameter	Diameter (Ø)											
		12.0	14.0	16.0	18.0	20.0	22.0	25.0	28.0	30.0	32.0	36.0	40.0
1	Vc	35	35	35	35	35	35	35	35	35	35	35	35
	fz	0.061	0.069	0.079	0.079	0.089	0.067	0.067	0.067	0.067	0.067	0.065	0.071
	RPM	928	796	696	619	557	506	446	398	371	348	309	279
	FEED	227	220	220	196	198	204	179	160	149	140	121	119
2	Vc	30	30	30	30	30	30	30	30	30	30	30	30
	fz	0.056	0.057	0.071	0.08	0.089	0.059	0.06	0.06	0.059	0.06	0.06	0.068
	RPM	796	682	597	531	477	434	382	341	318	298	265	239
	FEED	178	156	170	170	170	154	138	123	113	107	95	97
3-4	Vc	25	25	25	25	25	25	25	25	25	25	25	25
	fz	0.048	0.054	0.058	0.066	0.066	0.05	0.048	0.048	0.05	0.049	0.05	0.056
	RPM	663	568	497	442	398	362	318	284	265	199	221	199
	FEED	127	123	115	117	105	109	92	82	80	58	66	67
5	Vc	15	15	15	15	15	15	15	15	15	15	15	15
	fz	0.047	0.054	0.058	0.065	0.074	0.049	0.046	0.047	0.047	0.054	0.049	0.053
	RPM	398	341	298	265	239	217	191	171	159	149	133	119
	FEED	75	74	69	69	71	64	53	48	45	48	39	38
6	Vc	30	30	30	30	30	30	30	30	30	30	30	30
	fz	0.056	0.057	0.071	0.08	0.089	0.059	0.06	0.06	0.059	0.06	0.06	0.068
	RPM	796	682	597	531	477	434	382	341	318	298	265	239
	FEED	178	156	170	170	170	154	138	123	113	107	95	97
7	Vc	25	25	25	25	25	25	25	25	25	25	25	25
	fz	0.048	0.054	0.058	0.066	0.066	0.05	0.048	0.048	0.05	0.049	0.05	0.056
	RPM	663	568	497	442	398	362	318	284	265	199	221	199
	FEED	127	123	115	117	105	109	92	82	80	58	66	67
8-9	Vc	15	15	15	15	15	15	15	15	15	15	15	15
	fz	0.047	0.054	0.058	0.065	0.074	0.049	0.046	0.047	0.047	0.054	0.049	0.053
	RPM	398	341	298	265	239	217	191	171	159	149	133	119
	FEED	75	74	69	69	71	64	53	48	45	48	39	38
10	Vc	30	30	30	30	30	30	30	30	30	30	30	30
	fz	0.056	0.057	0.071	0.08	0.089	0.059	0.06	0.06	0.059	0.06	0.06	0.068
	RPM	796	682	597	531	477	434	382	341	318	298	265	239
	FEED	178	156	170	170	170	154	138	123	113	107	95	97
11.1	Vc	15	15	15	15	15	15	15	15	15	15	15	15
	fz	0.047	0.054	0.058	0.065	0.074	0.049	0.046	0.047	0.047	0.054	0.049	0.053
	RPM	398	341	298	265	239	217	191	171	159	149	133	119
	FEED	75	74	69	69	71	64	53	48	45	48	39	38
21-22	Vc	95	95	100	100	100	95	95	95	95	105	100	100
	fz	0.057	0.06	0.066	0.074	0.075	0.054	0.058	0.061	0.06	0.061	0.061	0.063
	RPM	2520	2160	1989	1768	1592	1375	1210	1080	1114	995	884	796
	FEED	575	518	525	523	477	445	421	395	408	358	324	301
23-24	Vc	62	62	65	65	65	62	62	62	68	65	65	65
	fz	0.057	0.06	0.066	0.074	0.075	0.054	0.058	0.061	0.061	0.06	0.061	0.063
	RPM	1645	1410	1293	1149	1035	897	789	705	722	647	575	517
	FEED	375	338	341	340	310	291	275	258	264	233	210	196




**EQ574, EQ597 SERIES 4 FLUTE TiAlN COATED - SIDE CUTTING**

Vc = m/min.  
fz = mm/tooth  
RPM = rev./min.  
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)							
						2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0
P	1	Non-alloy steel	0.1D	1.5D	Vc	50	45	50	50	45	50	50	45
					fz	0.004	0.008	0.013	0.02	0.025	0.036	0.045	0.062
					RPM	7958	4775	3979	3183	2387	1989	1592	1194
	2		Vc	40	40	40	40	40	40	40	40		
			fz	0.003	0.006	0.011	0.018	0.023	0.036	0.045	0.057		
			RPM	6366	4244	3183	2546	2122	1592	1273	1061		
	3-4		Vc	35	35	30	35	30	35	35	30		
			fz	0.003	0.006	0.009	0.014	0.018	0.029	0.039	0.047		
			RPM	5570	3714	2387	2228	1592	1194	1114	928		
	5		Vc	20	20	20	20	20	20	20	20		
			fz	0.002	0.004	0.01	0.014	0.019	0.028	0.035	0.048		
RPM		3183	2122	1592	1273	1061	796	637	531				
6	Vc	40	40	40	40	40	40	40	40				
	fz	0.003	0.006	0.011	0.018	0.023	0.036	0.045	0.057				
	RPM	6366	4244	3183	2546	2122	1592	1273	1061				
7	Vc	35	35	30	35	30	35	35	30				
	fz	0.003	0.006	0.009	0.014	0.018	0.029	0.039	0.047				
	RPM	5570	3714	2387	2228	1592	1194	1114	928				
8-9	Vc	20	20	20	20	20	20	20	20				
	fz	0.002	0.004	0.01	0.014	0.019	0.028	0.035	0.048				
	RPM	3183	2122	1592	1273	1061	796	637	531				
10	Vc	40	40	40	40	40	40	40	40				
	fz	0.003	0.006	0.011	0.018	0.023	0.036	0.045	0.057				
	RPM	6366	4244	3183	2546	2122	1592	1273	1061				
11.1	Vc	20	20	20	20	20	20	20	20				
	fz	0.002	0.004	0.01	0.014	0.019	0.028	0.035	0.048				
	RPM	3183	2122	1592	1273	1061	796	637	531				
N	21-22	Aluminum-wrought alloy	0.1D	1.5D	Vc	105	145	140	140	150	140	135	130
					fz	0.005	0.009	0.014	0.019	0.021	0.036	0.048	0.057
					RPM	16711	15385	11141	8913	7958	5570	4297	3448
	23-24		Vc	68	94	91	91	98	91	88	85		
			fz	0.005	0.009	0.014	0.019	0.021	0.036	0.048	0.057		
			RPM	10823	9974	7242	5793	5199	3621	2801	2255		
N	21-22	Aluminum-cast, alloyed	0.1D	1.5D	Vc	68	94	91	91	98	91	88	85
					fz	0.005	0.009	0.014	0.019	0.021	0.036	0.048	0.057
					RPM	10823	9974	7242	5793	5199	3621	2801	2255
	23-24		Vc	216	359	406	440	437	521	538	514		
			fz	0.005	0.009	0.014	0.019	0.021	0.036	0.048	0.057		
			RPM	10823	9974	7242	5793	5199	3621	2801	2255		

※ The FEED, in long & extra long types, should be reduced by around 50%


▶ NEXT PAGE



**EQ574, EQ597 SERIES 4 FLUTE TiAlN COATED - SIDE CUTTING**

Vc = m/min.  
fz = mm/tooth  
RPM = rev./min.  
FEED = mm/min.

VDI 3323	Parameter	Diameter (Ø)										
		14.0	16.0	18.0	20.0	22.0	25.0	28.0	30.0	32.0	36.0	40.0
1	Vc	50	50	50	50	50	50	50	45	50	50	50
	fz	0.07	0.078	0.078	0.088	0.067	0.064	0.068	0.065	0.065	0.063	0.071
	RPM	1137	995	884	796	723	637	568	477	497	442	398
	FEED	318	310	276	280	291	244	232	186	194	167	170
2	Vc	45	40	40	40	45	45	45	40	40	40	40
	fz	0.056	0.07	0.08	0.087	0.058	0.062	0.058	0.057	0.058	0.06	0.069
	RPM	1023	796	707	637	651	573	512	424	398	354	318
	FEED	229	223	226	222	227	213	178	145	138	127	132
3-4	Vc	35	35	30	35	35	35	35	30	30	30	30
	fz	0.053	0.056	0.066	0.066	0.048	0.046	0.046	0.05	0.05	0.047	0.057
	RPM	796	696	531	557	506	446	398	371	298	309	239
	FEED	169	156	140	147	146	123	110	111	90	87	82
5	Vc	20	20	20	20	20	20	20	20	20	15	20
	fz	0.053	0.056	0.064	0.075	0.05	0.047	0.054	0.054	0.054	0.056	0.056
	RPM	455	398	354	318	289	255	227	212	199	133	159
	FEED	96	89	91	95	87	72	74	69	64	45	53
6	Vc	45	40	40	40	45	45	45	40	40	40	40
	fz	0.056	0.07	0.08	0.087	0.058	0.062	0.058	0.057	0.058	0.06	0.069
	RPM	1023	796	707	637	651	573	512	424	398	354	318
	FEED	229	223	226	222	227	213	178	145	138	127	132
7	Vc	35	35	30	35	35	35	35	30	30	30	30
	fz	0.053	0.056	0.066	0.066	0.048	0.046	0.046	0.05	0.05	0.047	0.057
	RPM	796	696	531	557	506	446	398	371	298	309	239
	FEED	169	156	140	147	146	123	110	111	90	87	82
8-9	Vc	20	20	20	20	20	20	20	20	20	15	20
	fz	0.053	0.056	0.064	0.075	0.05	0.047	0.054	0.054	0.054	0.056	0.056
	RPM	455	398	354	318	289	255	227	212	199	133	159
	FEED	96	89	91	95	87	72	74	69	64	45	53
10	Vc	45	40	40	40	45	45	45	40	40	40	40
	fz	0.056	0.07	0.08	0.087	0.058	0.062	0.058	0.057	0.058	0.06	0.069
	RPM	1023	796	707	637	651	573	512	424	398	354	318
	FEED	229	223	226	222	227	213	178	145	138	127	132
11.1	Vc	20	20	20	20	20	20	20	20	20	15	20
	fz	0.053	0.056	0.064	0.075	0.05	0.047	0.054	0.054	0.054	0.056	0.056
	RPM	455	398	354	318	289	255	227	212	199	133	159
	FEED	96	89	91	95	87	72	74	69	64	45	53
21-22	Vc	135	140	140	140	135	135	135	145	140	140	140
	fz	0.06	0.066	0.074	0.074	0.054	0.058	0.06	0.06	0.06	0.061	0.064
	RPM	3069	2785	2476	2228	1953	1719	1535	1393	1238	1114	1114
	FEED	737	735	733	660	633	598	552	554	501	453	428
23-24	Vc	88	91	91	91	88	88	88	94	91	91	91
	fz	0.06	0.066	0.074	0.074	0.054	0.058	0.06	0.06	0.06	0.061	0.064
	RPM	2001	1810	1609	1448	1273	1120	1000	997	905	805	724
	FEED	480	478	476	429	413	390	360	359	326	294	278



**E2753, E2762, E2751, E2752 SERIES**


**MULTI FLUTE ROUGHING - SIDE CUTTING**

Vc = m/min.  
fz = mm/tooth  
RPM = rev./min.  
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)					
						6.0	8.0	10.0	12.0	14.0	16.0
P	1	Non-alloy steel	0.5D	1.5D	Vc	35	35	35	35	35	35
					fz	0.015	0.025	0.034	0.05	0.056	0.064
					RPM	1857	1393	1114	928	796	696
	FEED		84	104	152	186	178	178			
	2		Vc	30	30	30	30	30	30		
			fz	0.013	0.023	0.033	0.044	0.05	0.063		
			RPM	1592	1194	955	796	682	597		
	FEED		62	82	126	140	136	150			
	3-4		Vc	25	25	25	25	25	25		
			fz	0.015	0.024	0.034	0.044	0.049	0.061		
			RPM	1326	995	796	663	568	497		
FEED	60	72	108	117	111	121					
5	Vc	15	15	15	15	15	15				
	fz	0.013	0.021	0.033	0.044	0.05	0.063				
	RPM	796	597	477	398	341	298				
FEED	31	38	63	70	68	75					
6	Vc	30	30	30	30	30	30				
	fz	0.013	0.023	0.033	0.044	0.05	0.063				
	RPM	1592	1194	955	796	682	597				
FEED	62	82	126	140	136	150					
7	Vc	25	25	25	25	25	25				
	fz	0.015	0.024	0.034	0.044	0.049	0.061				
	RPM	1326	995	796	663	568	497				
FEED	60	72	108	117	111	121					
8-9	Vc	15	15	15	15	15	15				
	fz	0.013	0.021	0.033	0.044	0.05	0.063				
	RPM	796	597	477	398	341	298				
FEED	31	38	63	70	68	75					
10	Vc	30	30	30	30	30	30				
	fz	0.013	0.023	0.033	0.044	0.05	0.063				
	RPM	1592	1194	955	796	682	597				
FEED	62	82	126	140	136	150					
11.1	Vc	15	15	15	15	15	15				
	fz	0.013	0.021	0.033	0.044	0.05	0.063				
	RPM	796	597	477	398	341	298				
FEED	31	38	63	70	68	75					
N	21-22	Aluminum-wrought alloy	0.5D	1.5D	Vc	85	80	80	75	80	80
					fz	0.015	0.025	0.035	0.05	0.058	0.07
					RPM	4509	3183	2546	1989	1819	1592
FEED	203	239	357	398	422	446					
23-24	Aluminum-cast, alloyed	0.5D	1.5D	Vc	55	52	52	49	52	52	
				fz	0.015	0.025	0.035	0.05	0.058	0.07	
				RPM	2918	2069	1655	1300	1182	1035	
FEED	131	155	232	260	274	290					

※ The FEED, in long & extra long types, should be reduced by around 50%

▶ NEXT PAGE




**E2753, E2762, E2751, E2752 SERIES**

**MULTI FLUTE ROUGHING - SIDE CUTTING**

Vc = m/min.  
fz = mm/tooth  
RPM = rev./min.  
FEED = mm/min.

VDI 3323	Parameter	Diameter (Ø)									
		18.0	20.0	22.0	25.0	28.0	30.0	32.0	36.0	40.0	50.0
1	Vc	35	35	35	35	35	35	35	35	35	35
	fz	0.071	0.08	0.088	0.098	0.088	0.1	0.1	0.113	0.119	0.152
	RPM	619	557	506	446	398	371	348	309	279	223
	FEED	176	178	223	218	210	223	209	210	199	203
2	Vc	30	30	30	30	30	30	30	30	30	30
	fz	0.07	0.078	0.076	0.085	0.076	0.086	0.095	0.107	0.114	0.157
	RPM	531	477	434	382	341	318	298	265	239	191
	FEED	149	149	165	162	156	164	170	170	163	180
3-4	Vc	25	25	25	25	25	25	25	25	25	25
	fz	0.069	0.069	0.08	0.09	0.077	0.087	0.098	0.108	0.111	0.146
	RPM	442	398	362	318	284	265	199	221	199	159
	FEED	122	110	145	143	131	138	117	143	132	139
5	Vc	15	15	15	15	15	15	15	15	15	15
	fz	0.07	0.08	0.077	0.094	0.089	0.089	0.101	0.118	0.121	0.148
	RPM	265	239	217	191	171	159	149	133	119	95
	FEED	74	76	84	90	91	85	90	94	87	85
6	Vc	30	30	30	30	30	30	30	30	30	30
	fz	0.07	0.078	0.076	0.085	0.076	0.086	0.095	0.107	0.114	0.157
	RPM	531	477	434	382	341	318	298	265	239	191
	FEED	149	149	165	162	156	164	170	170	163	180
7	Vc	25	25	25	25	25	25	25	25	25	25
	fz	0.069	0.069	0.08	0.09	0.077	0.087	0.098	0.108	0.111	0.146
	RPM	442	398	362	318	284	265	199	221	199	159
	FEED	122	110	145	143	131	138	117	143	132	139
8-9	Vc	15	15	15	15	15	15	15	15	15	15
	fz	0.07	0.08	0.077	0.094	0.089	0.089	0.101	0.118	0.121	0.148
	RPM	265	239	217	191	171	159	149	133	119	95
	FEED	74	76	84	90	91	85	90	94	87	85
10	Vc	30	30	30	30	30	30	30	30	30	30
	fz	0.07	0.078	0.076	0.085	0.076	0.086	0.095	0.107	0.114	0.157
	RPM	531	477	434	382	341	318	298	265	239	191
	FEED	149	149	165	162	156	164	170	170	163	180
11.1	Vc	15	15	15	15	15	15	15	15	15	15
	fz	0.07	0.08	0.077	0.094	0.089	0.089	0.101	0.118	0.121	0.148
	RPM	265	239	217	191	171	159	149	133	119	95
	FEED	74	76	84	90	91	85	90	94	87	85
21-22	Vc	80	75	75	80	80	85	80	80	80	80
	fz	0.084	0.104	0.085	0.09	0.094	0.098	0.104	0.112	0.119	0.123
	RPM	1415	1194	1085	1019	909	902	796	707	637	509
	FEED	475	497	461	458	513	530	497	475	455	376
23-24	Vc	52	49	49	52	52	55	52	52	52	52
	fz	0.084	0.104	0.085	0.09	0.094	0.098	0.104	0.112	0.119	0.123
	RPM	920	780	709	662	591	584	517	460	414	331
	FEED	309	324	301	298	333	343	323	309	295	244



**EQ753, EQ762, EQ751, EQ752 SERIES**


**MULTI FLUTE ROUGHING TiAlN COATED - SIDE CUTTING**

Vc = m/min.  
fz = mm/tooth  
RPM = rev./min.  
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)						
						6.0	8.0	10.0	12.0	14.0	16.0	
P	1	Non-alloy steel	0.5D	1.5D	Vc	45	50	50	45	50	50	
					fz	0.015	0.025	0.034	0.05	0.057	0.063	
					RPM	2387	1989	1592	1194	1137	995	
	2		Vc	40	40	40	40	45	40			
			fz	0.013	0.023	0.034	0.044	0.049	0.061			
			RPM	2122	1592	1273	1061	1023	796			
	3-4		Vc	30	30	35	35	35	35			
			fz	0.015	0.024	0.035	0.043	0.048	0.06			
			RPM	1592	1194	1114	928	796	696			
	5		Vc	20	20	20	20	20	20			
			fz	0.012	0.021	0.033	0.045	0.05	0.063			
RPM		1061	796	637	531	455	398					
6	Vc	40	40	40	40	45	40					
	fz	0.013	0.023	0.034	0.044	0.049	0.061					
	RPM	2122	1592	1273	1061	1023	796					
7	Vc	30	30	35	35	35	35					
	fz	0.015	0.024	0.035	0.043	0.048	0.06					
	RPM	1592	1194	1114	928	796	696					
8-9	Vc	20	20	20	20	20	20					
	fz	0.012	0.021	0.033	0.045	0.05	0.063					
	RPM	1061	796	637	531	455	398					
10	Vc	40	40	40	40	45	40					
	fz	0.013	0.023	0.034	0.044	0.049	0.061					
	RPM	2122	1592	1273	1061	1023	796					
11.1	Vc	20	20	20	20	20	20					
	fz	0.012	0.021	0.033	0.045	0.05	0.063					
	RPM	1061	796	637	531	455	398					
N	21-22	Aluminum-wrought alloy	0.5D	1.5D	Vc	120	110	110	105	110	115	
					fz	0.015	0.025	0.035	0.05	0.059	0.07	
					RPM	6366	4377	3501	2785	2501	2288	
	23-24		Aluminum-cast, alloyed	0.5D	1.5D	Vc	78	72	72	68	72	75
						fz	0.015	0.025	0.035	0.05	0.059	0.07
						RPM	4138	2865	2292	1804	1637	1492
FEED	186	215		321	361	386	418					

※ The FEED, in long & extra long types, should be reduced by around 50%

▶ NEXT PAGE




**EQ753, EQ762, EQ751, EQ752 SERIES**

**MULTI FLUTE ROUGHING TiAlN COATED - SIDE CUTTING**

Vc = m/min.  
fz = mm/tooth  
RPM = rev./min.  
FEED = mm/min.

VDI 3323	Parameter	Diameter (Ø)									
		18.0	20.0	22.0	25.0	28.0	30.0	32.0	36.0	40.0	50.0
1	Vc	50	50	50	50	50	45	50	50	50	45
	fz	0.069	0.078	0.089	0.095	0.089	0.098	0.098	0.109	0.117	0.156
	RPM	884	796	723	637	568	477	497	442	398	286
2	Vc	40	40	45	45	45	40	40	40	40	40
	fz	0.07	0.075	0.074	0.087	0.075	0.083	0.094	0.107	0.117	0.16
	RPM	707	637	651	573	512	424	398	354	318	255
3-4	Vc	30	35	35	35	35	35	30	35	30	35
	fz	0.07	0.07	0.078	0.087	0.075	0.086	0.1	0.1	0.113	0.148
	RPM	531	557	506	446	398	371	298	309	239	223
5	Vc	20	20	20	20	20	20	20	20	15	20
	fz	0.071	0.083	0.08	0.096	0.091	0.091	0.1	0.118	0.141	0.153
	RPM	354	318	289	255	227	212	199	177	119	127
6	Vc	40	40	45	45	45	40	40	40	40	40
	fz	0.07	0.075	0.074	0.087	0.075	0.083	0.094	0.107	0.117	0.16
	RPM	707	637	651	573	512	424	398	354	318	255
7	Vc	30	35	35	35	35	35	30	35	30	35
	fz	0.07	0.07	0.078	0.087	0.075	0.086	0.1	0.1	0.113	0.148
	RPM	531	557	506	446	398	371	298	309	239	223
8-9	Vc	20	20	20	20	20	20	20	20	15	20
	fz	0.071	0.083	0.08	0.096	0.091	0.091	0.1	0.118	0.141	0.153
	RPM	354	318	289	255	227	212	199	177	119	127
10	Vc	40	40	45	45	45	40	40	40	40	40
	fz	0.07	0.075	0.074	0.087	0.075	0.083	0.094	0.107	0.117	0.16
	RPM	707	637	651	573	512	424	398	354	318	255
11.1	Vc	20	20	20	20	20	20	20	20	15	20
	fz	0.071	0.083	0.08	0.096	0.091	0.091	0.1	0.118	0.141	0.153
	RPM	354	318	289	255	227	212	199	177	119	127
21-22	Vc	110	105	105	110	110	120	110	115	115	110
	fz	0.085	0.103	0.085	0.09	0.095	0.099	0.106	0.11	0.117	0.124
	RPM	1945	1671	1519	1401	1251	1273	1094	1017	915	700
23-24	Vc	72	68	68	72	72	78	72	75	75	72
	fz	0.085	0.103	0.085	0.09	0.095	0.099	0.106	0.11	0.117	0.124
	RPM	1273	1082	984	917	819	828	716	663	597	458
FEED	433	446	418	413	467	492	456	438	419	341	




**E2595 SERIES 4FLUTE - SIDE CUTTING**

Vc = m/min.  
fz = mm/tooth  
RPM = rev./min.  
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)						
						2.0	3.0	4.0	5.0	6.0	8.0	10.0
P	1	Non-alloy steel	0.1D	1.5D	Vc	35	35	35	35	35	35	35
					fz	0.004	0.008	0.013	0.02	0.025	0.036	0.045
					RPM	5570	3714	2785	2228	1857	1393	1114
	2		0.1D	1.5D	Vc	30	30	30	30	30	30	30
					fz	0.003	0.006	0.011	0.017	0.023	0.036	0.044
					RPM	4775	3183	2387	1910	1592	1194	955
	3-4		0.1D	1.5D	Vc	25	25	25	25	25	25	25
					fz	0.003	0.006	0.009	0.014	0.019	0.029	0.038
					RPM	3979	2653	1989	1592	1326	995	796
	5		0.1D	1.5D	Vc	15	15	15	15	15	15	15
					fz	0.002	0.005	0.01	0.014	0.019	0.029	0.036
RPM		2387			1592	1194	955	796	597	477		
6	0.1D	1.5D	Vc	30	30	30	30	30	30	30		
			fz	0.003	0.006	0.011	0.017	0.023	0.036	0.044		
			RPM	4775	3183	2387	1910	1592	1194	955		
7	0.1D	1.5D	Vc	25	25	25	25	25	25	25		
			fz	0.003	0.006	0.009	0.014	0.019	0.029	0.038		
			RPM	3979	2653	1989	1592	1326	995	796		
8-9	0.1D	1.5D	Vc	15	15	15	15	15	15	15		
			fz	0.002	0.005	0.01	0.014	0.019	0.029	0.036		
			RPM	2387	1592	1194	955	796	597	477		
10	0.1D	1.5D	Vc	30	30	30	30	30	30	30		
			fz	0.003	0.006	0.011	0.017	0.023	0.036	0.044		
			RPM	4775	3183	2387	1910	1592	1194	955		
11.1	0.1D	1.5D	Vc	15	15	15	15	15	15	15		
			fz	0.002	0.005	0.01	0.014	0.019	0.029	0.036		
			RPM	2387	1592	1194	955	796	597	477		
21-22	0.1D	1.5D	Vc	75	105	100	100	105	100	95		
			fz	0.005	0.009	0.014	0.019	0.021	0.036	0.048		
			RPM	11937	11141	7958	6366	5570	3979	3024		
23-24	0.1D	1.5D	Vc	49	68	65	65	68	65	62		
			fz	0.005	0.009	0.014	0.019	0.021	0.036	0.048		
			RPM	7799	7215	5173	4138	3608	2586	1974		

※ The FEED, in long & extra long types, should be reduced by around 50%


▶ NEXT PAGE



**E2595 SERIES 4 FLUTE - SIDE CUTTING**

Vc = m/min.  
fz = mm/tooth  
RPM = rev./min.  
FEED = mm/min.

VDI 3323	Parameter	Diameter (Ø)											
		12.0	14.0	16.0	18.0	20.0	22.0	25.0	28.0	30.0	32.0	36.0	40.0
1	Vc	35	35	35	35	35	35	35	35	35	35	35	35
	fz	0.061	0.069	0.079	0.079	0.089	0.1	0.1	0.067	0.067	0.067	0.065	0.071
	RPM	928	796	696	619	557	506	446	398	371	348	309	279
2	Vc	30	30	30	30	30	30	30	30	30	30	30	30
	fz	0.056	0.057	0.071	0.08	0.089	0.089	0.091	0.06	0.059	0.06	0.06	0.068
	RPM	796	682	597	531	477	434	382	341	318	298	265	239
3-4	Vc	25	25	25	25	25	25	25	25	25	25	25	25
	fz	0.048	0.054	0.058	0.066	0.066	0.075	0.073	0.048	0.05	0.049	0.05	0.056
	RPM	663	568	497	442	398	362	318	284	265	199	221	199
5	Vc	15	15	15	15	15	15	15	15	15	15	15	15
	fz	0.047	0.054	0.058	0.065	0.074	0.074	0.069	0.047	0.047	0.054	0.049	0.053
	RPM	398	341	298	265	239	217	191	171	159	149	133	119
6	Vc	30	30	30	30	30	30	30	30	30	30	30	30
	fz	0.056	0.057	0.071	0.08	0.089	0.089	0.091	0.06	0.059	0.06	0.06	0.068
	RPM	796	682	597	531	477	434	382	341	318	298	265	239
7	Vc	25	25	25	25	25	25	25	25	25	25	25	25
	fz	0.048	0.054	0.058	0.066	0.066	0.075	0.073	0.048	0.05	0.049	0.05	0.056
	RPM	663	568	497	442	398	362	318	284	265	199	221	199
8-9	Vc	15	15	15	15	15	15	15	15	15	15	15	15
	fz	0.047	0.054	0.058	0.065	0.074	0.074	0.069	0.047	0.047	0.054	0.049	0.053
	RPM	398	341	298	265	239	217	191	171	159	149	133	119
10	Vc	30	30	30	30	30	30	30	30	30	30	30	30
	fz	0.056	0.057	0.071	0.08	0.089	0.089	0.091	0.06	0.059	0.06	0.06	0.068
	RPM	796	682	597	531	477	434	382	341	318	298	265	239
11.1	Vc	15	15	15	15	15	15	15	15	15	15	15	15
	fz	0.047	0.054	0.058	0.065	0.074	0.074	0.069	0.047	0.047	0.054	0.049	0.053
	RPM	398	341	298	265	239	217	191	171	159	149	133	119
21-22	Vc	95	95	100	100	100	95	95	95	105	100	100	100
	fz	0.057	0.06	0.066	0.074	0.075	0.08	0.088	0.061	0.061	0.06	0.061	0.06
	RPM	2520	2160	1989	1768	1592	1375	1210	1080	1114	995	884	796
23-24	Vc	62	62	65	65	65	62	62	62	68	65	65	65
	fz	0.057	0.06	0.066	0.074	0.075	0.08	0.088	0.061	0.061	0.06	0.061	0.06
	RPM	1645	1410	1293	1149	1035	897	789	705	722	647	575	517




**EQ595 SERIES 4 FLUTE TiAlN COATED - SIDE CUTTING**

Vc = m/min.  
fz = mm/tooth  
RPM = rev/min.  
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)							
						2.0	3.0	4.0	5.0	6.0	8.0	10.0	
P	1	Non-alloy steel	0.1D	1.5D	Vc	50	45	50	50	45	50	50	
					fz	0.004	0.008	0.013	0.02	0.025	0.036	0.045	
					RPM	7958	4775	3979	3183	2387	1989	1592	
	2		Vc	40	40	40	40	40	40	40			
			fz	0.003	0.006	0.011	0.018	0.023	0.036	0.045			
			RPM	6366	4244	3183	2546	2122	1592	1273			
	3-4		Vc	35	35	30	35	30	35	35			
			fz	0.003	0.006	0.009	0.014	0.018	0.029	0.039			
			RPM	5570	3714	2387	2228	1592	1194	1114			
	5		Vc	20	20	20	20	20	20	20			
			fz	0.002	0.004	0.01	0.014	0.019	0.028	0.035			
RPM		3183	2122	1592	1273	1061	796	637					
6	Vc	40	40	40	40	40	40	40					
	fz	0.003	0.006	0.011	0.018	0.023	0.036	0.045					
	RPM	6366	4244	3183	2546	2122	1592	1273					
7	Vc	35	35	30	35	30	35	35					
	fz	0.003	0.006	0.009	0.014	0.018	0.029	0.039					
	RPM	5570	3714	2387	2228	1592	1194	1114					
8-9	Vc	20	20	20	20	20	20	20					
	fz	0.002	0.004	0.01	0.014	0.019	0.028	0.035					
	RPM	3183	2122	1592	1273	1061	796	637					
10	Vc	40	40	40	40	40	40	40					
	fz	0.003	0.006	0.011	0.018	0.023	0.036	0.045					
	RPM	6366	4244	3183	2546	2122	1592	1273					
11.1	Vc	20	20	20	20	20	20	20					
	fz	0.002	0.004	0.01	0.014	0.019	0.028	0.035					
	RPM	3183	2122	1592	1273	1061	796	637					
N	21-22	Aluminum-wrought alloy	0.1D	1.5D	Vc	105	145	140	140	150	140	135	
					fz	0.005	0.009	0.014	0.019	0.021	0.036	0.048	
					RPM	16711	15385	11141	8913	7958	5570	4297	
	23-24		Aluminum-cast, alloyed	0.1D	1.5D	Vc	68	94	91	91	98	91	88
						fz	0.005	0.009	0.014	0.019	0.021	0.036	0.048
						RPM	10823	9974	7242	5793	5199	3621	2801
Vc	216	359		406	440	437	521	538					

※ The FEED, in long & extra long types, should be reduced by around 50%


▶ NEXT PAGE



**EQ595 SERIES 4 FLUTE TiAlN COATED - SIDE CUTTING**

Vc = m/min.  
fz = mm/tooth  
RPM = rev/min.  
FEED = mm/min.

VDI 3323	Parameter	Diameter (Ø)											
		12.0	14.0	16.0	18.0	20.0	22.0	25.0	28.0	30.0	32.0	36.0	40.0
1	Vc	45	50	50	50	50	50	50	50	45	50	50	50
	fz	0.062	0.07	0.078	0.078	0.088	0.1	0.096	0.068	0.065	0.065	0.063	0.071
	RPM	1194	1137	995	884	796	723	637	568	477	497	442	398
	FEED	296	318	310	276	280	289	244	232	186	194	167	170
2	Vc	40	45	40	40	40	45	45	45	40	40	40	40
	fz	0.057	0.056	0.07	0.08	0.087	0.087	0.093	0.058	0.057	0.058	0.06	0.069
	RPM	1061	1023	796	707	637	651	573	512	424	398	354	318
	FEED	242	229	223	226	222	227	213	178	145	138	127	132
3-4	Vc	35	35	35	30	35	35	35	35	30	35	30	30
	fz	0.047	0.053	0.056	0.066	0.066	0.073	0.069	0.046	0.05	0.05	0.047	0.057
	RPM	928	796	696	531	557	506	446	398	371	298	309	239
	FEED	175	169	156	140	147	148	123	110	111	90	87	82
5	Vc	20	20	20	20	20	20	20	20	20	20	15	20
	fz	0.048	0.053	0.056	0.064	0.075	0.075	0.07	0.054	0.054	0.054	0.056	0.056
	RPM	531	455	398	354	318	289	255	227	212	199	133	159
	FEED	102	96	89	91	95	87	71	74	69	64	45	53
6	Vc	40	45	40	40	40	45	45	45	40	40	40	40
	fz	0.057	0.056	0.07	0.08	0.087	0.087	0.093	0.058	0.057	0.058	0.06	0.069
	RPM	1061	1023	796	707	637	651	573	512	424	398	354	318
	FEED	242	229	223	226	222	227	213	178	145	138	127	132
7	Vc	35	35	35	30	35	35	35	35	30	35	30	30
	fz	0.047	0.053	0.056	0.066	0.066	0.073	0.069	0.046	0.05	0.05	0.047	0.057
	RPM	928	796	696	531	557	506	446	398	371	298	309	239
	FEED	175	169	156	140	147	148	123	110	111	90	87	82
8-9	Vc	20	20	20	20	20	20	20	20	20	20	15	20
	fz	0.048	0.053	0.056	0.064	0.075	0.075	0.07	0.054	0.054	0.054	0.056	0.056
	RPM	531	455	398	354	318	289	255	227	212	199	133	159
	FEED	102	96	89	91	95	87	71	74	69	64	45	53
10	Vc	40	45	40	40	40	45	45	45	40	40	40	40
	fz	0.057	0.056	0.07	0.08	0.087	0.087	0.093	0.058	0.057	0.058	0.06	0.069
	RPM	1061	1023	796	707	637	651	573	512	424	398	354	318
	FEED	242	229	223	226	222	227	213	178	145	138	127	132
11.1	Vc	20	20	20	20	20	20	20	20	20	20	15	20
	fz	0.048	0.053	0.056	0.064	0.075	0.075	0.07	0.054	0.054	0.054	0.056	0.056
	RPM	531	455	398	354	318	289	255	227	212	199	133	159
	FEED	102	96	89	91	95	87	71	74	69	64	45	53
21-22	Vc	130	135	140	140	140	135	135	135	145	140	140	140
	fz	0.057	0.06	0.066	0.074	0.074	0.081	0.087	0.06	0.06	0.06	0.061	0.064
	RPM	3448	3069	2785	2476	2228	1953	1719	1535	1538	1393	1238	1114
	FEED	786	737	735	733	660	633	598	552	554	501	453	428
23-24	Vc	85	88	91	91	91	88	88	88	94	91	91	91
	fz	0.057	0.06	0.066	0.074	0.074	0.081	0.087	0.06	0.06	0.06	0.061	0.064
	RPM	2255	2001	1810	1609	1448	1273	1120	1000	997	905	805	724
	FEED	514	480	478	476	429	413	390	360	359	326	294	278




**E2755 SERIES 3 FLUTE ROUGHING - SIDE CUTTING**

Vc = m/min.  
fz = mm/tooth  
RPM = rev./min.  
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)			
						6.0	8.0	10.0	12.0
P	1	Non-alloy steel	0.5D	1.5D	Vc	35	35	35	35
					fz	0.015	0.025	0.045	0.067
					RPM	1857	1393	1114	928
	FEED		84	104	150	187			
	2		Vc	30	30	30	30		
			fz	0.013	0.023	0.044	0.058		
			RPM	1592	1194	955	796		
	FEED		62	82	126	138			
	3-4		Vc	25	25	25	25		
			fz	0.015	0.024	0.046	0.058		
			RPM	1326	995	796	663		
FEED	60	72	110	115					
5	Vc	15	15	15	15				
	fz	0.013	0.021	0.044	0.058				
	RPM	796	597	477	398				
FEED	31	38	63	69					
6	Vc	30	30	30	30				
	fz	0.013	0.023	0.044	0.058				
	RPM	1592	1194	955	796				
FEED	62	82	126	138					
7	Vc	25	25	25	25				
	fz	0.015	0.024	0.046	0.058				
	RPM	1326	995	796	663				
FEED	60	72	110	115					
8-9	Vc	15	15	15	15				
	fz	0.013	0.021	0.044	0.058				
	RPM	796	597	477	398				
FEED	31	38	63	69					
10	Vc	30	30	30	30				
	fz	0.013	0.023	0.044	0.058				
	RPM	1592	1194	955	796				
FEED	62	82	126	138					
11.1	Vc	15	15	15	15				
	fz	0.013	0.021	0.044	0.058				
	RPM	796	597	477	398				
FEED	31	38	63	69					
N	21-22	Aluminum-wrought alloy	0.5D	1.5D	Vc	85	80	80	75
					fz	0.015	0.025	0.047	0.067
					RPM	4509	3183	2546	1989
FEED	203	239	359	400					
23-24	Aluminum-cast, alloyed	0.5D	1.5D	Vc	55	52	52	49	
				fz	0.015	0.025	0.047	0.067	
				RPM	2918	2069	1655	1300	
FEED	131	155	233	261					

※ The FEED, in long & extra long types, should be reduced by around 50%


▶ NEXT PAGE



**E2755 SERIES 3 FLUTE ROUGHING - SIDE CUTTING**

Vc = m/min.  
fz = mm/tooth  
RPM = rev./min.  
FEED = mm/min.

VDI 3323	Parameter	Diameter (Ø)						
		14.0	16.0	18.0	20.0	22.0	25.0	30.0
1	Vc	35	35	35	35	35	35	35
	fz	0.075	0.086	0.095	0.107	0.147	0.163	0.2
	RPM	796	696	619	557	506	446	371
	FEED	179	180	176	179	223	218	223
2	Vc	30	30	30	30	30	30	30
	fz	0.067	0.083	0.093	0.104	0.126	0.142	0.172
	RPM	682	597	531	477	434	382	318
	FEED	137	149	148	149	164	163	164
3-4	Vc	25	25	25	25	25	25	25
	fz	0.065	0.081	0.092	0.092	0.133	0.151	0.173
	RPM	568	497	442	398	362	318	265
	FEED	111	121	122	110	144	144	138
5	Vc	15	15	15	15	15	15	15
	fz	0.067	0.083	0.093	0.106	0.129	0.157	0.177
	RPM	341	298	265	239	217	191	159
	FEED	69	74	74	76	84	90	85
6	Vc	30	30	30	30	30	30	30
	fz	0.067	0.083	0.093	0.104	0.126	0.142	0.172
	RPM	682	597	531	477	434	382	318
	FEED	137	149	148	149	164	163	164
7	Vc	25	25	25	25	25	25	25
	fz	0.065	0.081	0.092	0.092	0.133	0.151	0.173
	RPM	568	497	442	398	362	318	265
	FEED	111	121	122	110	144	144	138
8-9	Vc	15	15	15	15	15	15	15
	fz	0.067	0.083	0.093	0.106	0.129	0.157	0.177
	RPM	341	298	265	239	217	191	159
	FEED	69	74	74	76	84	90	85
10	Vc	30	30	30	30	30	30	30
	fz	0.067	0.083	0.093	0.104	0.126	0.142	0.172
	RPM	682	597	531	477	434	382	318
	FEED	137	149	148	149	164	163	164
11.1	Vc	15	15	15	15	15	15	15
	fz	0.067	0.083	0.093	0.106	0.129	0.157	0.177
	RPM	341	298	265	239	217	191	159
	FEED	69	74	74	76	84	90	85
21 - 22	Vc	80	80	80	75	75	80	85
	fz	0.078	0.094	0.112	0.139	0.142	0.15	0.196
	RPM	1819	1592	1415	1194	1085	1019	902
	FEED	426	449	475	498	462	458	530
23 - 24	Vc	52	52	52	49	49	52	55
	fz	0.078	0.094	0.112	0.139	0.142	0.15	0.196
	RPM	1182	1035	920	780	709	662	584
	FEED	277	292	309	325	302	298	343







Global Cutting Tool Leader **YG-1**



# MILLING