



Leading Through Innovation



SOLID CARBIDE

X-POWER PRO END MILLS

X-POWER PRO VHM - FRÄSER

- For Pre-Hardened Steels up to HRc55
- Für vorgehärtete Stähle bis HRc55

SELECTION GUIDE



SOLID CARBIDE X-POWER PRO END MILLS

for Pre-Hardened Steels up to HRc55, Mold & Die, Dry & Wet Cutting



Please visit globalyg1.com/mat for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : p. C412

SERIES	GM876	GM813	GM886	GM902
FLUTE	2	2	2	2
HELIX ANGLE	30°	30°	30°	30°
CUTTING EDGE SHAPE	BALL NOSE	BALL NOSE	BALL NOSE	BALL NOSE
SIZE MIN	R0.5	R0.5	R0.25	R0.5
SIZE MAX	R8.0	R10.0	R3.0	R4.0
PAGE	C390	C391	C392	C394

	SHORT LENGTH	LONG LENGTH	RIB PROCESSING	TAPER NECK
Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating



ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc	GM876	GM813	GM886	GM902		
P	1	Non-alloy steel	About 0.15% C Annealed	125		○	○	○	○		
	2		About 0.45% C Annealed	190	13	○	○	○	○		
	3		About 0.45% C Quenched & Tempered	250	25	○	○	○	○		
	4		About 0.75% C Annealed	270	28	◎	◎	◎	○		
	5		About 0.75% C Quenched & Tempered	300	32	◎	◎	◎	○		
	6	Low alloy steel	Annealed	180	10	○	○	○	○		
	7		Quenched & Tempered	275	29	◎	◎	◎	◎		
	8		Quenched & Tempered	300	32	◎	◎	◎	◎		
	9		Quenched & Tempered	350	38	◎	◎	◎	◎		
	10		High alloyed steel, and tool steel	Annealed	200	15	○	○	○	○	
	11	Quenched & Tempered		325	35	◎	◎	◎	◎		
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15						
	13		Martensitic Quenched & Tempered	240	23						
	14		Austenitic	180	10						
K	15	Grey cast iron	Pearlitic / ferritic	180	10	○	○	○	○		
	16		Pearlitic (Martensitic)	260	26	○	○	○	○		
	17	Nodular cast iron	Ferritic	160	3	○	○	○	○		
	18		Pearlitic	250	25	○	○	○	○		
	19		Ferritic	130		○	○	○	○		
20	Malleable cast iron	Pearlitic	230	21	○	○	○	○			
N	21	Aluminum-wrought alloy	Not Curable	60							
	22		Curable Hardened	100							
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75							
	24		≤ 12% Si, Curable Hardened	90							
	25		> 12% Si, Not Curable	130							
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110							
	27		CuZn, CuSnZn (Brass)	90							
	28		CuSn, lead-free copper and electrolytic copper	100							
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic								
30	Rubber, Wood, etc.										
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15					
	32			Cured	280	30					
	33		Ni or Co Based	Annealed	250	25					
	34			Cured	350	38					
	35			Cast	320	34					
	36	Titanium Alloys	Pure Titanium	400 Rm							
37	Alpha + Beta Alloys		Hardened 1050 Rm								
H	38	Hardened steel	Hardened	550	55	○	○	○	○		
	39		Hardened	630	60	○	○	○	○		
	40	Chilled Cast Iron	Cast	400	42	◎	◎	◎	◎		
	41		Hardened	550	55	○	○	○	○		

GM815	GM818	GM8A1	GM839	GM819	GM810	GM883	GM895	GM811	GM817	GM812	GM834	GM814
4	2	2	4	4	2	2	3	4	4	6&8	6	3&4
30°	30°	30°	30°	30°	30°	30°	38°	30°	30°	45°	45°	20°
BALL NOSE	CORNER RADIUS	CORNER RADIUS	CORNER RADIUS	CORNER RADIUS	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	ROUGHING
R1.0	D4.0	D1.0	D2.0	D3.0	D0.4	D0.4	D1.0	D2.0	D2.0	D6.0	D6.0	D6.0
R8.0	D12.0	D6.0	D12.0	D20.0	D20.0	D6.0	D16.0	D25.0	D20.0	D20.0	D25.0	D20.0
C395	C396	C397	C399	C400	C401	C403	C406	C407	C408	C409	C410	C411
LONG LENGTH	LONG LENGTH	RIB PROCESSING	STUB LENGTH	LONG LENGTH	MINIATURE	RIB PROCESSING	SHORT LENGTH	SHORT LENGTH	LONG LENGTH	LONG LENGTH	EXTRA LONG LENGTH	LONG LENGTH
Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating



○	○	○	○	○	○	○	○	○	○	○	○	○	○	1
○	○	○	○	○	○	○	○	○	○	○	○	○	○	2
○	○	○	○	○	○	○	○	○	○	○	○	○	○	3
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	4
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	5
○	○	○	○	○	○	○	○	○	○	○	○	○	○	6
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	7
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	8
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	9
○	○	○	○	○	○	○	○	○	○	○	○	○	○	10
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	11
														12
														13
														14
○	○	○	○	○	○	○	○	○	○	○	○	○	○	15
○	○	○	○	○	○	○	○	○	○	○	○	○	○	16
○	○	○	○	○	○	○	○	○	○	○	○	○	○	17
○	○	○	○	○	○	○	○	○	○	○	○	○	○	18
○	○	○	○	○	○	○	○	○	○	○	○	○	○	19
○	○	○	○	○	○	○	○	○	○	○	○	○	○	20
														21
														22
														23
														24
														25
														26
														27
														28
														29
														30
														31
														32
														33
														34
														35
														36
														37
○	○	○	○	○	○	○	○	○	○	○	○	○	○	38
○	○	○	○	○	○	○	○	○	○	○	○	○	○	39
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	40
○	○	○	○	○	○	○	○	○	○	○	○	○	○	41




PLAIN SHANK **GM876** SERIES

CARBIDE, 2 FLUTE SHORT LENGTH BALL NOSE

- VOLLHARTMETALL, 2 SCHNEIDEN KURZ KUGELSTIRN
- ① Fraise carbure, 2 dents, hémisphérique, courte
- ② TAGLIENTI, SEMISFERICA, SERIE CORTA

- ▶ Economic type with short overall length.
- ▶ Radius tolerance ±0.02mm & short length of cut.

- ▶ Günstige Variante, kurze Gesamlänge.
- ▶ Radius Toleranz ±0.02mm und kurze Schneidenlänge.

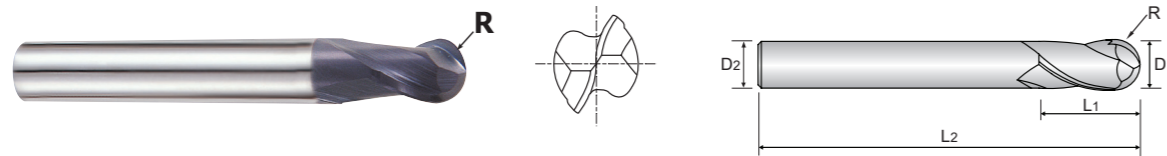

CARBIDE 2 30° ±0.02 PLAIN Y Coating p.C412~C413

Plain Shank
 HYDRAULIC CHUCK
 SHRINK FIT HOLDER
 POWER MILLING CHUCK
 ER COLLET CHUCK
 SK SLIM CHUCK

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	R(±0.02)	D1	D2	L1	L2
GM876010	R0.5	1.0	3	3	38
GM876020	R1.0	2.0	6	3	50
GM876030	R1.5	3.0	6	4	50
GM876040	R2.0	4.0	6	5	54
GM876060	R3.0	6.0	6	7	54
GM876080	R4.0	8.0	8	9	58
GM876100	R5.0	10.0	10	11	66
GM876120	R6.0	12.0	12	12	73
GM876160	R8.0	16.0	16	16	82

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ -0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	45	15	23	10	10	10	26	3	25	13	21
HB	125	190	250	270	300	180	275	300	350	200	200	240	180	180	180	260	160	250	130	230
Recommend	○	○	○	◎	◎	○	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	○

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials	Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron					
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○




PLAIN SHANK **GM813** SERIES

CARBIDE, 2 FLUTE LONG LENGTH BALL NOSE

- VOLLHARTMETALL, 2 SCHNEIDEN LANG KUGELSTIRN
- ① Fraise carbure, 2 dents, hémisphérique, longue
- ② TAGLIENTI, SEMISFERICA, SERIE LUNGA

- ▶ Designed to machine tool steel, alloy steel, mold steel and other high hardened materials.
- ▶ For copy - milling machines.

- ▶ Zur Bearbeitung von Werkzeugstählen, Legierten Stählen, Stahlguß und gehärteten Stählen.
- ▶ Für Kopierfräsmaschinen.

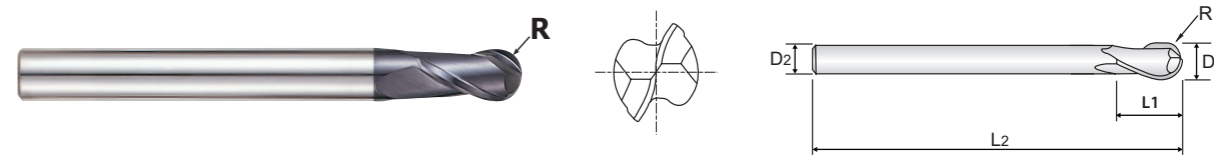

CARBIDE 2 30° ±0.02 PLAIN Y Coating p.C412~C413

Plain Shank
 HYDRAULIC CHUCK
 SHRINK FIT HOLDER
 POWER MILLING CHUCK
 ER COLLET CHUCK
 SK SLIM CHUCK

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	R(±0.02)	D1	D2	L1	L2
GM813010	R0.5	1.0	4	2.5	50
GM813020	R1.0	2.0	6	5	50
GM813030	R1.5	3.0	6	8	60
GM813040	R2.0	4.0	6	8	70
GM813050	R2.5	5.0	6	10	80
GM813060	R3.0	6.0	6	12	90
GM813080	R4.0	8.0	8	14	100
GM813100	R5.0	10.0	10	18	100
GM813120	R6.0	12.0	12	22	110
GM813160	R8.0	16.0	16	30	140
GM813200	R10.0	20.0	20	38	160

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ -0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	45	15	23	10	10	10	26	3	25	13	21
HB	125	190	250	270	300	180	275	300	350	200	200	240	180	180	180	260	160	250	130	230
Recommend	○	○	○	◎	◎	○	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	○


ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials	Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron					
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○



PLAIN SHANK GM886 SERIES

CARBIDE, 2 FLUTE BALL NOSE for RIB PROCESSING

- VOLLHARTMETALL, 2 SCHNEIDEN KUGELSTIRN für SCHMALE RIPPEN
- Fraise carbure, 2 dents, hémisphérique pour usinage de rainure
- 2 TAGLIENTI, SEMISFERICA PER NERVATURE

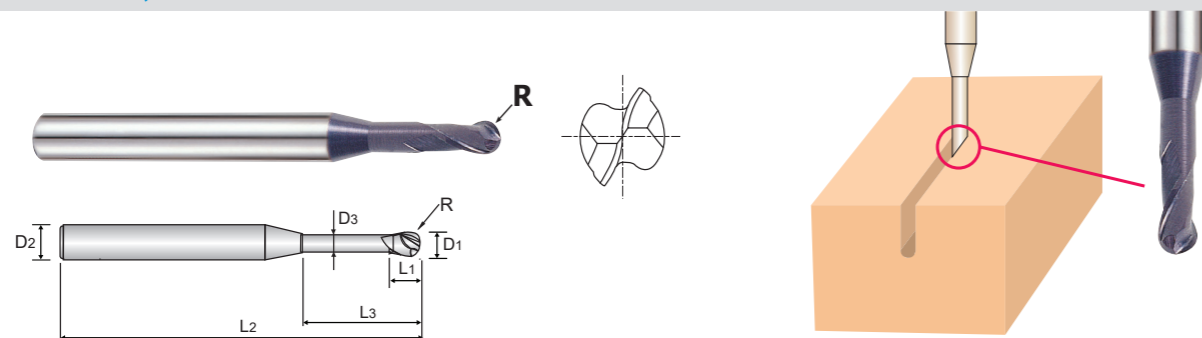

CARBIDE 2 30° ±0.01 PLAIN Coating Y p.C414~C415

Plain Shank
 Recommended ToolHolder: HYDRAULIC CHUCK, SHRINK FIT HOLDER, POWER MILLING CHUCK, ER COLLET CHUCK, SK SLIM CHUCK

Unit : mm

EDP No.	Radius of Ball Nose R(±0.01)	Mill Diameter D1	Shank Diameter D2	Length of Cut L1	Length Below Shank L3	Overall Length L2	Neck Diameter D3
GM886005	R0.25	0.5	4	0.7	2	45	0.45
GM886962	R0.25	0.5	4	0.7	4	45	0.45
GM886957	R0.3	0.6	4	0.9	2	45	0.55
GM886915	R0.3	0.6	4	0.9	4	45	0.55
GM886916	R0.3	0.6	4	0.9	6	45	0.55
GM886919	R0.4	0.8	4	1.2	4	45	0.75
GM886008	R0.4	0.8	4	1.2	6	45	0.75
GM886921	R0.5	1.0	4	1.5	4	45	0.95
GM886923	R0.5	1.0	4	1.5	5	45	0.95
GM886010	R0.5	1.0	4	1.5	6	45	0.95
GM886902	R0.5	1.0	4	1.5	8	45	0.95
GM886903	R0.5	1.0	4	1.5	10	45	0.95
GM886904	R0.5	1.0	4	1.5	12	45	0.95
GM886927	R0.5	1.0	4	1.5	16	50	0.95
GM886012	R0.6	1.2	4	1.8	8	45	1.15
GM886930	R0.75	1.5	4	2.3	6	45	1.45
GM886015	R0.75	1.5	4	2.3	8	45	1.45
GM886931	R0.75	1.5	4	2.3	10	45	1.45
GM886906	R0.75	1.5	4	2.3	12	45	1.45
GM886940	R1.0	2.0	4	3	6	45	1.95
GM886020	R1.0	2.0	4	3	8	45	1.95
GM886941	R1.0	2.0	4	3	10	45	1.95
GM886942	R1.0	2.0	4	3	12	50	1.95
GM886909	R1.0	2.0	4	3	16	50	1.95

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.02	h5

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	13	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	○	◎	◎	○	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○


ISO Material Description	N										S				H						
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	15	30	25	38	34						55	60	42	55			55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																○		◎		○	



PLAIN SHANK GM886 SERIES

CARBIDE, 2 FLUTE BALL NOSE for RIB PROCESSING

- VOLLHARTMETALL, 2 SCHNEIDEN KUGELSTIRN für SCHMALE RIPPEN
- Fraise carbure, 2 dents, hémisphérique pour usinage de rainure
- 2 TAGLIENTI, SEMISFERICA PER NERVATURE

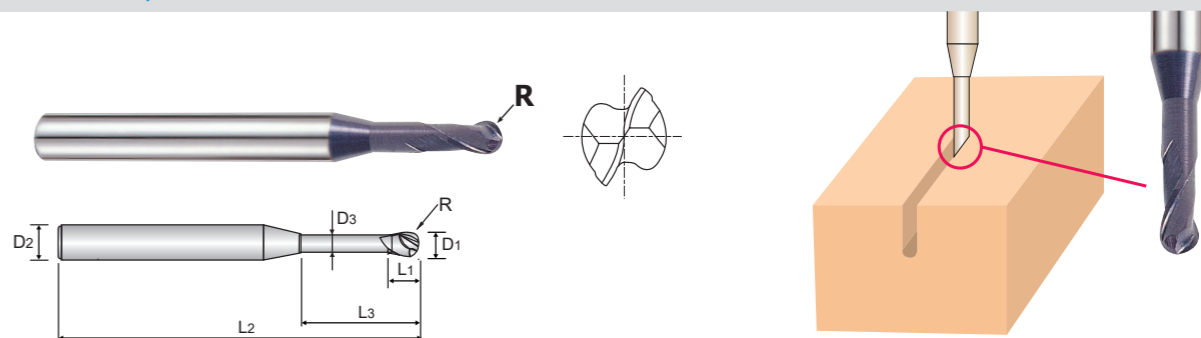

CARBIDE 2 30° ±0.01 PLAIN Coating Y p.C414~C415

Plain Shank
 Recommended ToolHolder: HYDRAULIC CHUCK, SHRINK FIT HOLDER, POWER MILLING CHUCK, ER COLLET CHUCK, SK SLIM CHUCK

Unit : mm

EDP No.	Radius of Ball Nose R(±0.01)	Mill Diameter D1	Shank Diameter D2	Length of Cut L1	Length Below Shank L3	Overall Length L2	Neck Diameter D3
GM886910	R1.0	2.0	4	3	20	55	1.95
GM886945	R1.0	2.0	4	3	25	60	1.95
GM886967	R1.0	2.0	4	3	30	70	1.95
GM886947	R1.5	3.0	6	4.5	10	50	2.85
GM886948	R1.5	3.0	6	4.5	12	50	2.85
GM886030	R1.5	3.0	6	4.5	16	55	2.85
GM886911	R1.5	3.0	6	4.5	20	60	2.85
GM886968	R1.5	3.0	6	4.5	25	65	2.85
GM886040	R2.0	4.0	6	6	16	60	3.85
GM886912	R2.0	4.0	6	6	20	65	3.85
GM886913	R2.0	4.0	6	6	25	70	3.85
GM886971	R2.0	4.0	6	6	30	70	3.85
GM886972	R2.0	4.0	6	6	35	80	3.85
GM886050	R2.5	5.0	6	7.5	16	60	4.85
GM886060	R3.0	6.0	6	9	20	80	5.85
GM886954	R3.0	6.0	6	9	30	90	5.85

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.02	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	13	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	○	◎	◎	○	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○

ISO Material Description	N										S				H						
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	15	30	25	38	34						55	60	42	55			55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																○		◎		○	





PLAIN SHANK **GM902** SERIES

CARBIDE, 2 FLUTE BALL NOSE with TAPER NECK

● **VOLLHARTMETALL, 2 SCHNEIDEN KUGELSTIRN mit KONISCH ABGESETZTEM SCHAFTTEIL**
 (●) **Fraise carbure, 2 dents, hémisphérique avec entrée conique**
 (●) **2 TAGLIENTI, SEMISFERICA, SCARICO CONICO**

▶ High efficiency milling in deep slotting due to long projection of the end mills. ▶ Effizientes Tiefnutenfräsen von tiefliegenden Bereichen möglich.

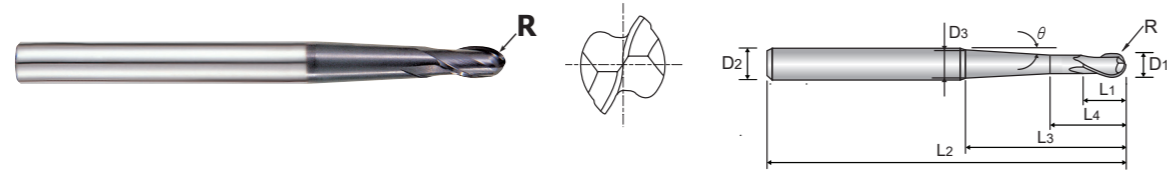

Unit : mm

EDP No.	Radius of Ball Nose R(±0.01)	Mill Diameter D1	Shank Diameter D2	Length of Cut L1	Under Neck Parallel Length L4	Length Below Shank L3	Overall Length L2	Neck Diameter D3	Taper Neck Angle θ
GM902010	R0.5	1.0	6	2	4	23	60	2	1° 30'
GM902901	R0.5	1.0	6	2	4	23	60	4.3	5°
GM902902	R0.5	1.0	6	2	4	42	80	5	3°
GM902020	R1.0	2.0	6	4	6	23	60	2.9	1° 30'
GM902903	R1.0	2.0	6	4	6	23	60	5	5°
GM902904	R1.0	2.0	6	4	6	41	80	5.7	3°
GM902030	R1.5	3.0	6	6	8	32	70	5.6	3°
GM902905	R1.5	3.0	6	6	8	52	90	5.3	1° 30'
GM902040	R2.0	4.0	6	8	10	28	70	5.9	3°
GM902906	R2.0	4.0	6	8	10	49	90	6	1° 30'
GM902060	R3.0	6.0	8	12	15	34	90	8	3°
GM902908	R3.0	6.0	8	12	15	53	110	8	1° 30'
GM902080	R4.0	8.0	10	14	17	36	100	10	3°
GM902909	R4.0	8.0	10	14	17	55	120	10	1° 30'

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	45	15	35	15	23	10	10	26	3	25	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO Material Description	N					S					H												
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○





PLAIN SHANK **GM815** SERIES

CARBIDE, 4 FLUTE LONG LENGTH BALL NOSE

● **VOLLHARTMETALL, 4 SCHNEIDEN LANG KUGELSTIRN**
 (●) **Fraise carbure, 4 dents, hémisphérique, longue**
 (●) **4 TAGLIENTI, SEMISFERICA, SERIE LUNGA**

▶ Designed to machine tool steels, alloy steels, mold steels and other high hardened materials. ▶ Für die Bearbeitung von Werkzeugstählen, Legierten Stählen, Stahlguß und gehärteten Stählen.
 ▶ For copy - milling machines. ▶ Für Kopierfräsmaschinen.
 ▶ 4 Flute design - higher feed than GM813 series. ▶ 4 Schneiden - Höherer Vorschub als bei GM813 serien.

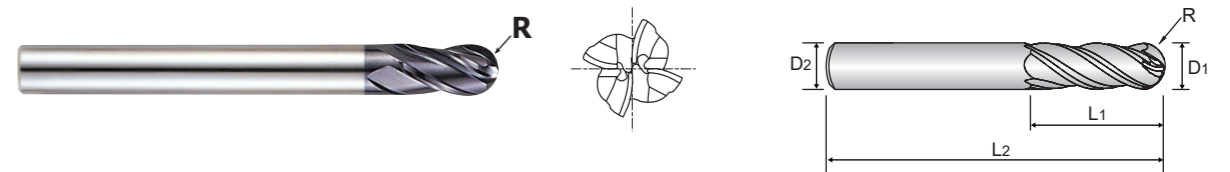

Unit : mm

EDP No.	Radius of Ball Nose R(±0.02)	Mill Diameter D1	Shank Diameter D2	Length of Cut L1	Overall Length L2
GM815020	R1.0	2.0	6	5	50
GM815030	R1.5	3.0	6	8	60
GM815040	R2.0	4.0	6	8	70
GM815050	R2.5	5.0	6	10	80
GM815060	R3.0	6.0	6	12	90
GM815080	R4.0	8.0	8	14	100
GM815100	R5.0	10.0	10	18	100
GM815120	R6.0	12.0	12	22	110
GM815160	R8.0	16.0	16	30	140

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	45	15	35	15	23	10	10	26	3	25	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO Material Description	N					S					H												
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○





PLAIN SHANK **GM818** SERIES

CARBIDE, 2 FLUTE LONG LENGTH CORNER RADIUS

- VOLLHARTMETALL, 2 SCHNEIDEN LANG ECKENRADIUS
- ① Fraise carbure, 2 dents, torique, longue
- ② 2 TAGLIENTI, TORICA, SERIE LUNGA

- ▶ Designed to machine tool steels, alloy steels, mold steels and other hardened materials.
- ▶ Superior workpiece finishes.
- ▶ Increased feed rates.

- ▶ Zur Bearbeitung von Werkzeugstählen, Legierten Stählen, Stahlguß und gehärteten Stählen.
- ▶ Bessere Werkstückoberflächen.
- ▶ Höhere Vorschubwerte.

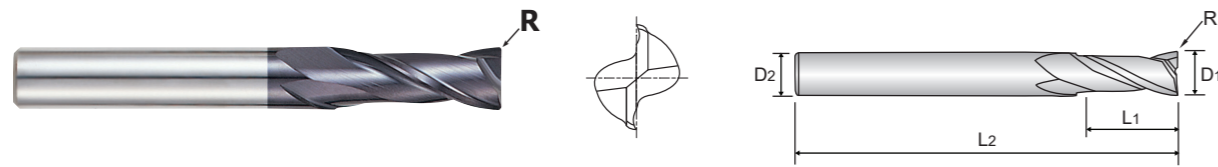

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	R	D1	D2	L1	L2
GM818911	R0.5	4.0	6	15	50
GM818060	R0.5	6.0	6	20	60
GM818901	R1.0	6.0	6	20	60
GM818080	R0.5	8.0	8	25	70
GM818902	R1.0	8.0	8	25	70
GM818100	R0.5	10.0	10	30	90
GM818905	R1.0	10.0	10	30	90
GM818908	R1.0	12.0	12	30	90

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ -0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloy steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	○	○	◎	◎	○	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	○




ISO Material Description	N					S					H											
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○



PLAIN SHANK **GM8A1** SERIES

CARBIDE, 2 FLUTE CORNER RADIUS for RIB PROCESSING

- VOLLHARTMETALL, 2 SCHNEIDEN ECKENRADIUS für SCHMALE RIPPEN
- ① Fraise carbure, 2 dents, torique pour usinage de rainure
- ② 2 TAGLIENTI, TORICA PER NERVATURE

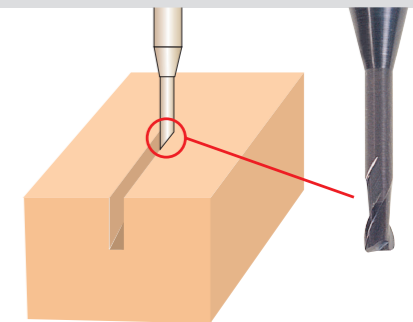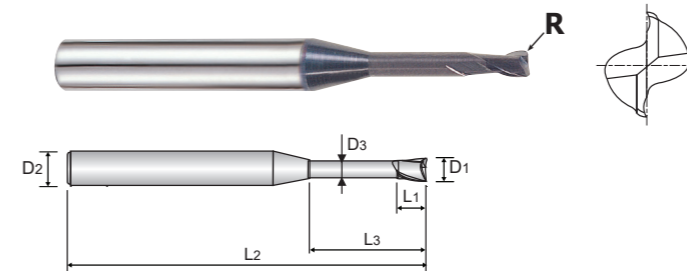

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R	D1	D2	L1	L3	L2	D3
GM8A1010	R0.1	1.0	4	1.5	6	45	0.95
GM8A1920	R0.1	1.0	4	1.5	8	45	0.95
GM8A1921	R0.1	1.0	4	1.5	10	45	0.95
GM8A1012	R0.2	1.2	4	1.8	6	45	1.15
GM8A1015	R0.2	1.5	4	2.3	6	45	1.45
GM8A1937	R0.2	1.5	4	2.3	8	45	1.45
GM8A1938	R0.2	1.5	4	2.3	10	45	1.45
GM8A1939	R0.2	1.5	4	2.3	12	45	1.45
GM8A1941	R0.2	1.5	4	2.3	16	50	1.45
GM8A1018	R0.2	1.8	4	2.7	6	45	1.75
GM8A1960	R0.2	2.0	4	3	6	45	1.95
GM8A1020	R0.2	2.0	4	3	8	45	1.95
GM8A1962	R0.2	2.0	4	3	12	45	1.95
GM8A1961	R0.2	2.0	4	3	10	45	1.95
GM8A1964	R0.2	2.0	4	3	16	50	1.95
GM8A1966	R0.2	2.0	4	3	20	55	1.95
GM8A1967	R0.2	2.0	4	3	25	60	1.95
GM8A1969	R0.2	2.5	4	3.7	12	45	2.40

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ -0.03	h5

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloy steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	○	○	◎	◎	○	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	○


ISO Material Description	N					S					H											
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○



PLAIN SHANK **GM8A1** SERIES

CARBIDE, 2 FLUTE CORNER RADIUS for RIB PROCESSING

- VOLLHARTMETALL, 2 SCHNEIDEN ECKENRADIUS für SCHMALE RIPPEN
- Fraise carbure, 2 dents, torique pour usinage de rainure
- 2 TAGLIENTI, TORICA PER NERVATURE

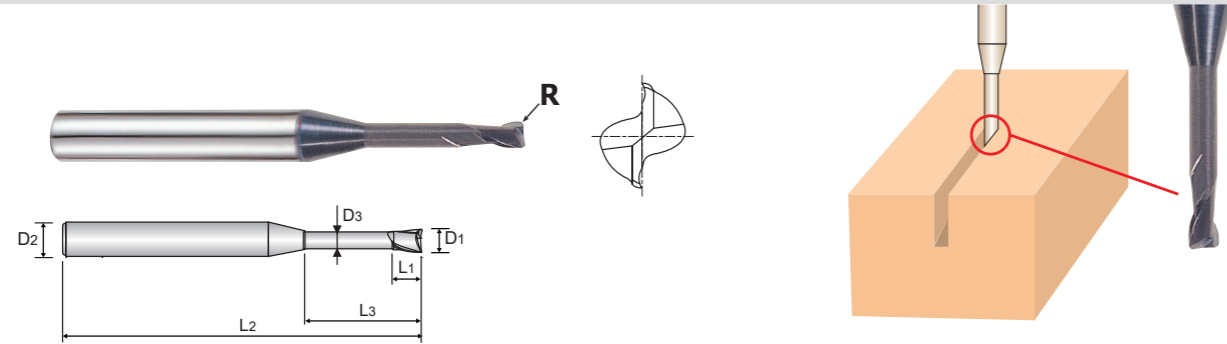

CARBIDE 2 30° PLAIN Coating Y p.C421~C422

Plain Shank
 HYDRAULIC CHUCK
 SHRINK FIT HOLDER
 POWER MILLING CHUCK
 ER COLLET CHUCK
 SK SLIM CHUCK
 Recommended ToolHolder

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R	D1	D2	L1	L3	L2	D3
GM8A1981	R0.3	3.0	6	4.5	16	55	2.85
GM8A1983	R0.3	3.0	6	4.5	20	60	2.85
GM8A1984	R0.3	3.0	6	4.5	25	65	2.85
GM8A1976	R0.3	3.0	6	4.5	30	70	2.85
GM8A1985	R0.3	3.0	6	4.5	40	90	2.85
GM8A1040	R0.3	4.0	6	6	12	50	3.85
GM8A1986	R0.3	4.0	6	6	16	60	3.85
GM8A1987	R0.3	4.0	6	6	20	60	3.85
GM8A1060	R0.5	6.0	6	9	20	80	5.85
GM8A1802	R0.5	6.0	6	9	40	100	5.85

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ -0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	130	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	○	◎	◎	○	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○



PLAIN SHANK **GM839** SERIES

CARBIDE, 4 FLUTE STUB LENGTH CORNER RADIUS

- VOLLHARTMETALL, 4 SCHNEIDEN EXTRA KURZ ECKENRADIUS
- Fraise carbure, 4 dents, torique, extra-courte
- 4 TAGLIENTI, TORICA, TAGLIENTE CORTO, SCARICATA

- ▶ Designed to machine tool steels, alloy steels, mold steels and other hardened materials.
- ▶ Superior workpiece finishes.
- ▶ Increased feed rates.

- ▶ Zur Bearbeitung von Werkzeugstählen, Legierten Stählen, Stahlguß und gehärteten Stählen.
- ▶ Bessere Werkstückoberflächen.
- ▶ Höhere Vorschubwerte.



CARBIDE 4 30° PLAIN Coating Y p.C423

Plain Shank
 HYDRAULIC CHUCK
 SHRINK FIT HOLDER
 POWER MILLING CHUCK
 ER COLLET CHUCK
 SK SLIM CHUCK
 Recommended ToolHolder

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R	D1	D2	L1	L3	L2	D3
GM839020	R0.2	2.0	6	2.5	5	50	1.9
GM839030	R0.3	3.0	6	4	7	50	2.8
GM839040	R0.4	4.0	6	5	9	50	3.7
GM839060	R0.6	6.0	6	7	14	55	5.6
GM839080	R0.8	8.0	8	10	18	60	7.4
GM839100	R1.0	10.0	10	12	25	70	9.4
GM839120	R1.2	12.0	12	15	30	80	11.4

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ -0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	130	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	○	◎	◎	○	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○





PLAIN SHANK **GM819** SERIES

CARBIDE, 4 FLUTE LONG LENGTH CORNER RADIUS

- VOLLHARTMETALL, 4 SCHNEIDEN LANG ECKENRADIUS
- ① Fraise carbure, 4 dents, torique, longue
- ② 4 TAGLIENTI, TORICA, SERIE LUNGA

- ▶ Designed to machine tool steels, alloy steels, mold steels and other hardened materials.
- ▶ 4 flute allows for better workpiece finishes.
- ▶ Increased production.

- ▶ Zur Bearbeitung von Werkzeugstählen, Legierten Stählen, Stahlguß und gehärteten Stählen.
- ▶ 4 Schneiden für bessere Oberflächengüte des Werkstücks.
- ▶ Gesteigerte Productivität.

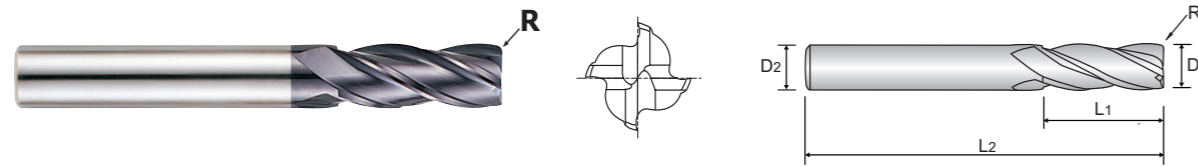

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	R	D1	D2	L1	L2
GM819030	R0.3	3.0	6	12	50
GM819040	R0.3	4.0	6	15	50
GM819911	R0.5	4.0	6	15	50
GM819912	R0.5	5.0	6	20	60
GM819060	R0.5	6.0	6	20	60
GM819901	R1.0	6.0	6	20	60
GM819080	R0.5	8.0	8	25	70
GM819902	R1.0	8.0	8	25	70
GM819904	R2.0	8.0	8	25	70
GM819100	R0.5	10.0	10	30	90
GM819905	R1.0	10.0	10	30	90
GM819906	R1.5	10.0	10	30	90
GM819907	R2.0	10.0	10	30	90
GM819120	R0.5	12.0	12	30	90
GM819908	R1.0	12.0	12	30	90
GM819909	R1.5	12.0	12	30	90
GM819910	R2.0	12.0	12	30	90
GM819160	R0.5	16.0	16	50	110
GM819916	R1.0	16.0	16	50	110
GM819918	R2.0	16.0	16	50	110
GM819921	R2.0	20.0	20	55	110

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	○	○	◎	◎	○	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	○	○

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																		○	◎	○	○





PLAIN SHANK **GM810** SERIES

CARBIDE, 2 FLUTE MINIATURE

- VOLLHARTMETALL, 2 SCHNEIDEN MINI
- ① Fraise carbure, 2 dents, micro-fraise
- ② 2 TAGLIENTI, MINI

- ▶ High precision milling in medical, optical, electronics and aerospace industries.
- ▶ Excellent performance on hardened steel

- ▶ Hochpräzises Fräsen für Medizintechnik, Optik, Elektronik und Raumfahrt.
- ▶ Ausgezeichnete Leistung bei der Bearbeitung von gehärtetem Stahl.

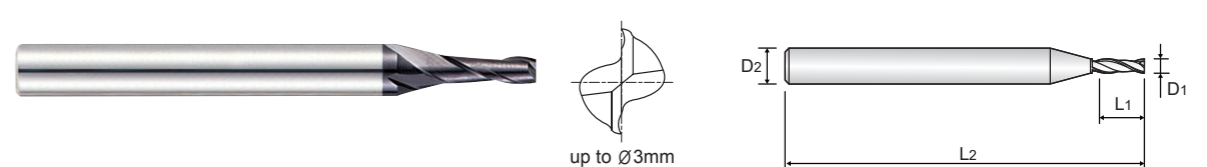

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	D1	D2	L1	L2
GM810004	0.4	3	0.8	40
GM810005	0.5	3	1	40
GM810006	0.6	3	1.2	40
GM810007	0.7	3	1.4	40
GM810008	0.8	3	1.6	40
GM810009	0.9	3	2	40
GM810010	1.0	4	2.5	40
GM810901	1.0	6	2.5	40
GM810012	1.2	4	4	40
GM810014	1.4	4	4	40
GM810015	1.5	4	4	40
GM810902	1.5	6	4	40
GM810020	2.0	4	6	40
GM810903	2.0	6	6	40
GM810025	2.5	4	8	40
GM810030	3.0	6	8	45

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	○	○	◎	◎	○	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	○	○

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																		○	◎	○	○





PLAIN SHANK **GM810** SERIES

CARBIDE, 2 FLUTE SHORT LENGTH

- VOLLHARTMETALL, 2 SCHNEIDEN KURZ
- ① Fraise carbure, 2 dents, courte
- ② 2 TAGLIENTI, SERIE CORTA

- ▶ Designed to machine tool steels, alloy steels, mold steels and other hardened materials.
- ▶ Superior workpiece finishes.
- ▶ Increased feed rates.

- ▶ Zur Bearbeitung: Werkzeugstählen, Legierten Stählen, Stahlguß und gehärteten Stählen.
- ▶ Bessere Werkstückoberflächen.
- ▶ Höhere Vorschübe.

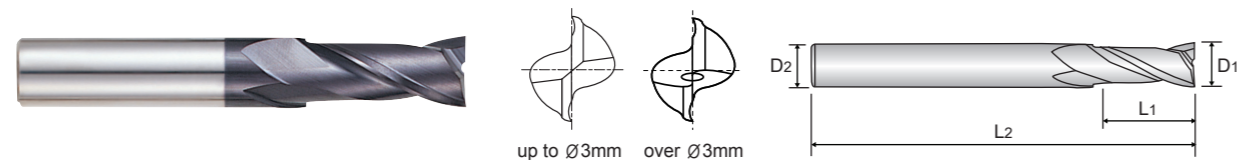

Unit : mm

EDP No.	Mill Diameter D1	Shank Diameter D2	Length of Cut L1	Overall Length L2
GM810035	3.5	6	10	45
GM810040	4.0	6	11	45
GM810050	5.0	6	13	50
GM810060	6.0	6	13	50
GM810070	7.0	8	16	60
GM810080	8.0	8	19	60
GM810090	9.0	10	19	70
GM810100	10.0	10	22	70
GM810110	11.0	12	22	75
GM810120	12.0	12	26	75
GM810140	14.0	14	26	85
GM810160	16.0	16	32	100
GM810180	18.0	18	32	100
GM810200	20.0	20	38	105

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	○	◎	◎	○	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	○



ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○



PLAIN SHANK **GM883** SERIES

CARBIDE, 2 FLUTE for RIB PROCESSING

- VOLLHARTMETALL, 2 SCHNEIDEN für SCHMALE RIPPEN
- ① Fraise carbure, 2 dents pour usinage de rainure
- ② 2 TAGLIENTI, SCARICATA PER NERVATURE

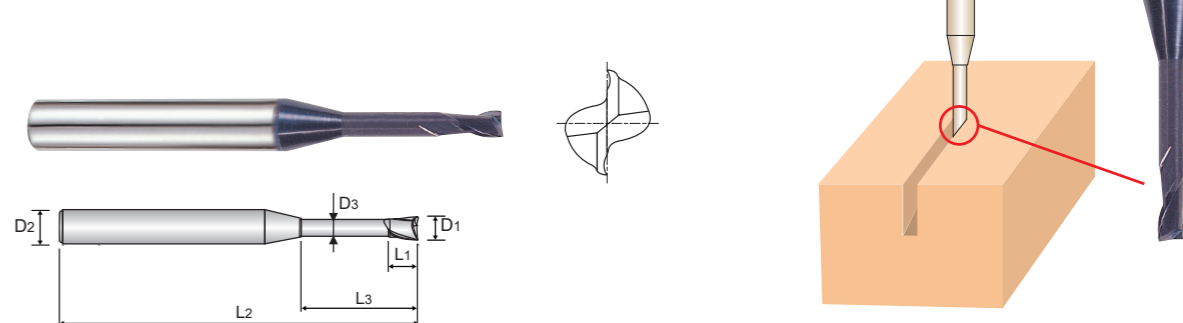

Unit : mm

EDP No.	Mill Diameter D1	Shank Diameter D2	Length of Cut L1	Length Below Shank L3	Overall Length L2	Neck Diameter D3
GM883004	0.4	4	0.6	2	45	0.37
GM883005	0.5	4	0.7	2	45	0.45
GM883988	0.5	4	0.7	4	45	0.45
GM883820	0.7	4	1	3	45	0.65
GM883008	0.8	4	1.2	4	45	0.75
GM883908	0.8	4	1.2	6	45	0.75
GM883996	1.0	4	1.5	4	45	0.95
GM883010	1.0	4	1.5	6	45	0.95
GM883912	1.0	4	1.5	8	45	0.95
GM883913	1.0	4	1.5	10	45	0.95
GM883914	1.0	4	1.5	12	45	0.95
GM883997	1.0	4	1.5	16	50	0.95
GM883998	1.0	4	1.5	20	55	0.95
GM883012	1.2	4	1.8	6	45	1.15
GM883015	1.5	4	2.3	6	45	1.45
GM883923	1.5	4	2.3	8	45	1.45
GM883924	1.5	4	2.3	10	45	1.45
GM883925	1.5	4	2.3	12	45	1.45
GM883927	1.5	4	2.3	16	50	1.45
GM883810	1.5	4	2.3	20	55	1.45

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.015	h5

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	○	◎	◎	○	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	○


ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○



PLAIN SHANK **GM883** SERIES

CARBIDE, 2 FLUTE for RIB PROCESSING

- VOLLHARTMETALL, 2 SCHNEIDEN für SCHMALE RIPPEN
- Fraise carbure, 2 dents pour usinage de rainure
- 2 TAGLIENTI, SCARICATA PER NERVATURE

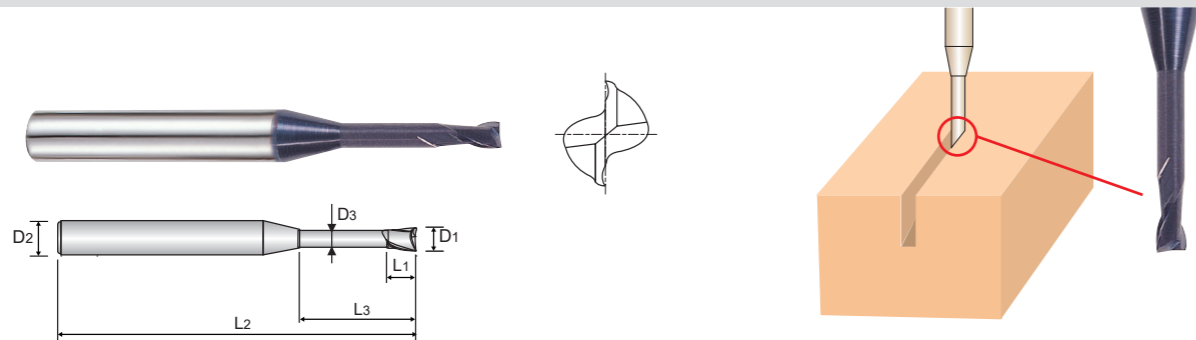

CARBIDE 2 30° PLAIN Coating Y p.C426~C427

Plain Shank
 Recommended ToolHolder: HYDRAULIC CHUCK, SHRINK FIT HOLDER, POWER MILLING CHUCK, ER COLLET CHUCK, SK SLIM CHUCK

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	D1	D2	L1	L3	L2	D3
GM883946	1.8	4	2.7	12	45	1.75
GM883958	2.0	4	3	6	45	1.95
GM883020	2.0	4	3	8	45	1.95
GM883959	2.0	4	3	10	45	1.95
GM883960	2.0	4	3	12	45	1.95
GM883961	2.0	4	3	14	50	1.95
GM883962	2.0	4	3	16	50	1.95
GM883964	2.0	4	3	20	55	1.95
GM883966	2.0	4	3	25	60	1.95
GM883814	2.0	4	3	30	70	1.95
GM883970	2.5	4	3.7	16	55	2.40
GM883975	3.0	6	4.5	10	45	2.85
GM883976	3.0	6	4.5	12	45	2.85
GM883978	3.0	6	4.5	16	55	2.85
GM883979	3.0	6	4.5	18	55	2.85
GM883980	3.0	6	4.5	20	60	2.85
GM883981	3.0	6	4.5	25	65	2.85
GM883832	3.0	6	4.5	30	70	2.85
GM883983	3.0	6	4.5	40	90	2.85

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.015	h5

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO Material Description	P									M				K							
	Non-alloy steel			Low alloy steel			High alloyed steel, and tool steel			Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron						
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	○	○	◎	◎	○	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	○


ISO Material Description	N						S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron								
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	55	60	42	42	55	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	◎	○	○



PLAIN SHANK **GM883** SERIES

CARBIDE, 2 FLUTE for RIB PROCESSING

- VOLLHARTMETALL, 2 SCHNEIDEN für SCHMALE RIPPEN
- Fraise carbure, 2 dents pour usinage de rainure
- 2 TAGLIENTI, SCARICATA PER NERVATURE

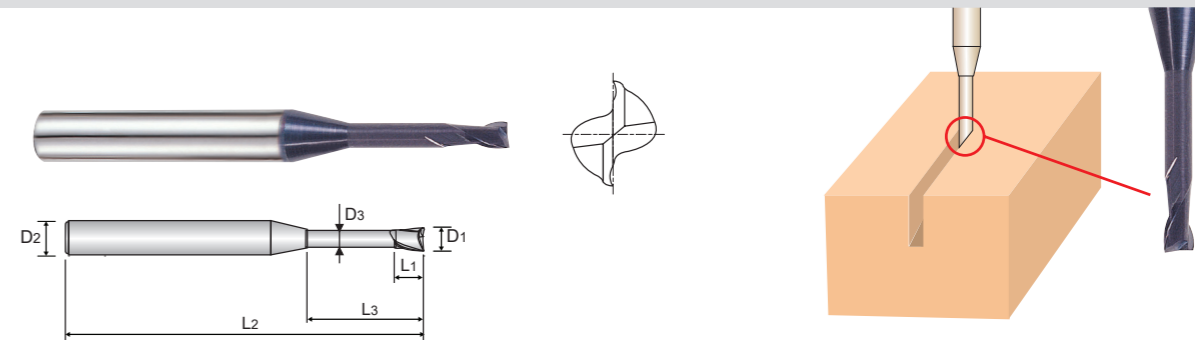

CARBIDE 2 30° PLAIN Coating Y p.C426~C427

Plain Shank
 Recommended ToolHolder: HYDRAULIC CHUCK, SHRINK FIT HOLDER, POWER MILLING CHUCK, ER COLLET CHUCK, SK SLIM CHUCK

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	D1	D2	L1	L3	L2	D3
GM883801	4.0	6	6	16	60	3.85
GM883802	4.0	6	6	20	60	3.85
GM883803	4.0	6	6	25	70	3.85
GM883834	4.0	6	6	30	70	3.85
GM883836	4.0	6	6	40	90	3.85
GM883838	4.0	6	6	50	100	3.85
GM883807	6.0	6	9	30	90	5.85
GM883809	6.0	6	9	50	110	5.85

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.015	h5

◎ : Excellent ○ : Good

ISO Material Description	P									M				K							
	Non-alloy steel			Low alloy steel			High alloyed steel, and tool steel			Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron						
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	○	○	◎	◎	○	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	○

ISO Material Description	N						S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron								
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	55	60	42	42	55	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	◎	○	○




PLAIN SHANK **GM895** SERIES

CARBIDE, 3 FLUTE 38° HELIX SHORT LENGTH

- VOLLHARTMETALL, 3 SCHNEIDEN 38° RECHTSSPIRALE KURZ
- ① Fraise carbure, 3 dents, hélice 38°, courte
- ② 3 TAGLIENTI, ELICA 38°, SERIE CORTA

- ▶ Designed to machine tool steels, alloy steels, mold steels and other hardened materials.
- ▶ Possesses the advantage of 2 flute and 4 flute end mill.
- ▶ Superior workpiece finishes.

- ▶ Zur Bearbeitung: Werkzeugstählen, Legierten Stählen, Stahlguß und gehärteten Stählen.
- ▶ Besitzt die Vorteile von 2 und 4 Schneiden Fräsern
- ▶ Bessere Werkstückoberflächen

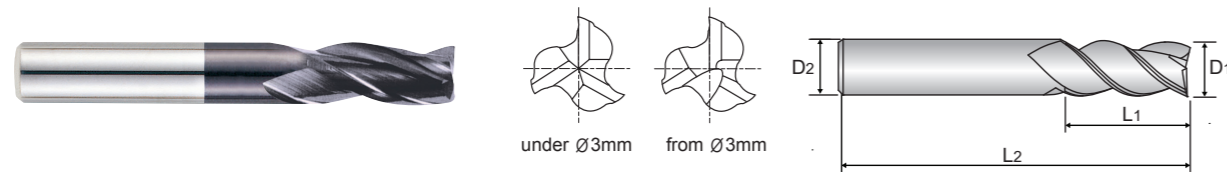

CARBIDE 3 38° PLAIN Coating Y p.C428-C429

Plain Shank
 HYDRAULIC CHUCK
 SHRINK FIT HOLDER
 POWER MILLING CHUCK
 ER COLLET CHUCK
 SK SLIM CHUCK
 Recommended ToolHolder

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	D1	D2	L1	L2
GM895010	1.0	3	2.5	38
GM895015	1.5	4	5	50
GM895025	2.5	3	7	38
GM895030	3.0	3	10	38
GM895901	3.0	6	10	50
GM895040	4.0	4	12	50
GM895903	4.0	6	12	50
GM895050	5.0	5	14	50
GM895904	5.0	6	14	57
GM895060	6.0	6	16	57
GM895080	8.0	8	20	63
GM895100	10.0	10	22	72
GM895120	12.0	12	25	73
GM895160	16.0	16	32	82

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	13	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	○	◎	◎	○	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	○

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○




PLAIN SHANK **GM811** SERIES

CARBIDE, 4 FLUTE SHORT LENGTH

- VOLLHARTMETALL, 4 SCHNEIDEN KURZ
- ① Fraise carbure, 4 dents, courte
- ② 4 TAGLIENTI, SERIE CORTA

- ▶ Designed to machine tool steels, alloy steels, mold steels and other hardened materials.
- ▶ 4 flute allows for better workpiece finishes.
- ▶ Increased Productivity.

- ▶ Zur Bearbeitung: Werkzeugstählen, Legierten Stählen, Stahlguß und gehärteten Stählen.
- ▶ 4 Schneiden erzeugen eine bessere Oberfläche des Werkstücks.
- ▶ Höhere Produktivität.

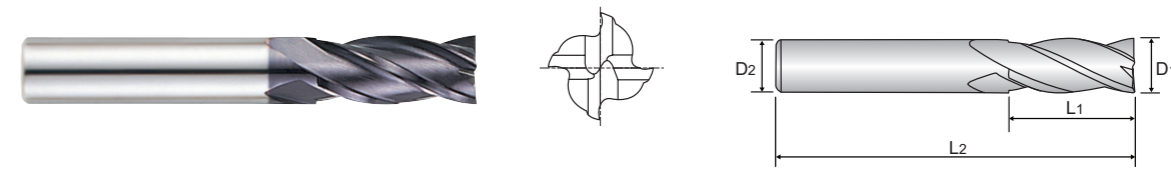

CARBIDE 4 30° PLAIN Coating Y p.C430

Plain Shank
 HYDRAULIC CHUCK
 SHRINK FIT HOLDER
 POWER MILLING CHUCK
 ER COLLET CHUCK
 SK SLIM CHUCK
 Recommended ToolHolder

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	D1	D2	L1	L2
GM811020	2.0	4	6	40
GM811901	2.0	6	6	40
GM811025	2.5	4	8	40
GM811902	2.5	6	8	40
GM811030	3.0	6	8	45
GM811035	3.5	6	10	45
GM811040	4.0	6	11	45
GM811045	4.5	6	11	45
GM811050	5.0	6	13	50
GM811060	6.0	6	13	50
GM811080	8.0	8	19	60
GM811100	10.0	10	22	70
GM811120	12.0	12	26	75
GM811140	14.0	14	26	85
GM811160	16.0	16	32	100
GM811200	20.0	20	38	105
GM811250	25.0	25	45	120

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	13	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	○	◎	◎	○	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	○

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○





PLAIN SHANK **GM817** SERIES

CARBIDE, 4 FLUTE LONG LENGTH

● **VOLLHARTMETALL, 4 SCHNEIDEN LANG**
 (●) **Fraise carbure, 4 dents, longue**
 (●) **4 TAGLIENTI, SERIE LUNGA**

- ▶ Designed to machine tool steels, alloy steels, mold steels and other hardened materials.
- ▶ 4 flute allows for better workpiece finishes.
- ▶ Increased Productivity.

- ▶ Zur Bearbeitung: Werkzeugstählen, Legierten Stählen, Stahlguß und gehärteten Stählen.
- ▶ 4 Schneiden erzeugen eine bessere Oberfläche des Werkstücks.
- ▶ Höhere Produktivität.

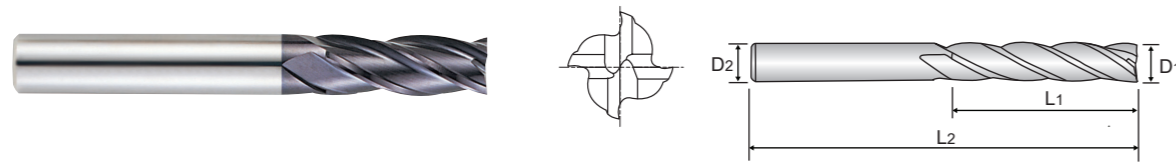

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	D1	D2	L1	L2
GM817020	2.0	4	8	40
GM817030	3.0	6	12	50
GM817040	4.0	6	15	50
GM817050	5.0	6	20	60
GM817060	6.0	6	20	60
GM817080	8.0	8	25	70
GM817100	10.0	10	30	90
GM817120	12.0	12	30	90
GM817140	14.0	16	40	110
GM817160	16.0	16	50	110
GM817200	20.0	20	55	110

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	35	38	40	42	45	48	50	52	55	58	60	62	65	68	70	72	
HB	125	190	250	270	300	180	210	230	260	280	200	240	270	300	180	210	160	200	130	230	
Recommend	○	○	○	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	

ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎





PLAIN SHANK **GM812** SERIES

CARBIDE, 6&8 FLUTE 45° HELIX LONG LENGTH

● **VOLLHARTMETALL, 6&8 SCHNEIDEN 45° RECHTSSPIRALE LANG**
 (●) **Fraise carbure, 6&8 dents, hélice 45°, longue**
 (●) **6&8 TAGLIENTI, ELICA 45°, SERIE**

- ▶ Designed to machine hardened materials.
- ▶ High speed cutting and finish milling with high feed rates.
- ▶ Superior workpiece finishes.
- ▶ Superior wear resistance.
- ▶ Suitable for dry milling.


- ▶ Geeignet zum Fräsen von gehärteten Stählen.
- ▶ Hochgeschwindigkeitsfräsen und Finishing mit erhöhtem Vorschub.
- ▶ Bessere Werkstückoberflächen
- ▶ Höhere Verschleißfestigkeit.
- ▶ Geeignet zum Trocken-Fräsen.

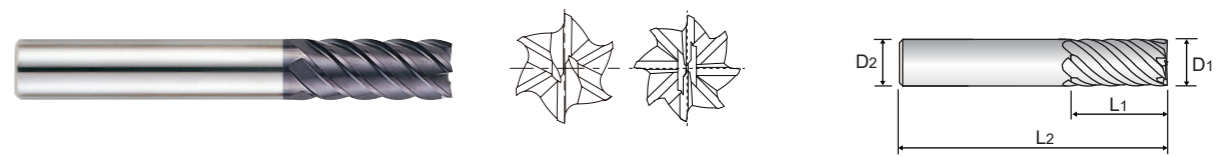

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	No. of Flute
	D1	D2	L1	L2	
GM812060	6.0	6	13	57	6
GM812080	8.0	8	19	63	6
GM812100	10.0	10	22	72	6
GM812120	12.0	12	26	83	6
GM812160	16.0	16	32	92	6
GM812200	20.0	20	38	104	8

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

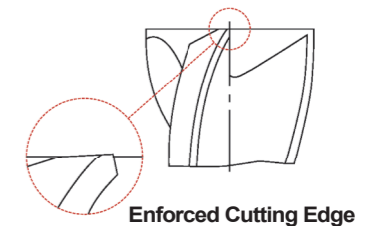

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	35	38	40	42	45	48	50	52	55	58	60	62	65	68	70	72	
HB	125	190	250	270	300	180	210	230	260	280	200	240	270	300	180	210	160	200	130	230	
Recommend	○	○	○	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	

ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎





PLAIN SHANK **GM834** SERIES

CARBIDE, 6 FLUTE 45° HELIX EXTRA LONG LENGTH

- VOLLHARTMETALL, 6 SCHNEIDEN 45° RECHTSSPIRALE EXTRA LANG
- ① Fraise carbure, 6 dents, hélice 45°, extra-longue
- ② 6 TAGLIENTI, ELICA 45°, SERIE EXTRA LUNGA

- ▶ Designed to machine hardened materials.
- ▶ High speed cutting and finish milling with high feed rates.
- ▶ Superior workpiece finishes.
- ▶ Superior wear resistance.
- ▶ Suitable for dry milling.


- ▶ Geeignet zum Fräsen von gehärteten Stählen.
- ▶ Hochgeschwindigkeitsfräsen und Finishing mit erhöhtem Vorschub.
- ▶ Bessere Werkstückoberflächen
- ▶ Höhere Verschleißfestigkeit.
- ▶ Geeignet zum Trocken-Fräsen.

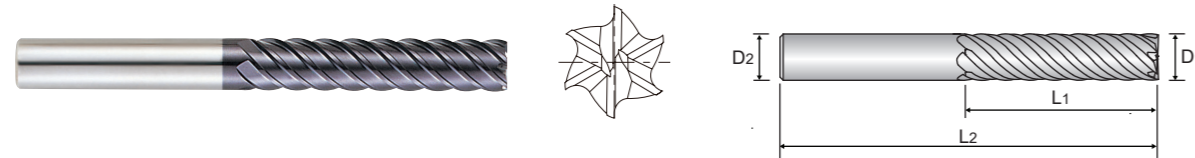

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	D1	D2	L1	L2
GM834060	6.0	6	26	70
GM834080	8.0	8	36	90
GM834100	10.0	10	46	100
GM834120	12.0	12	56	110
GM834160	16.0	16	66	130
GM834200	20.0	20	76	140
GM834250	25.0	25	92	180

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5



◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	○	◎	◎	○	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○





PLAIN SHANK **GM814** SERIES

CARBIDE, 3&4 FLUTE 20° HELIX LONG LENGTH ROUGHING - FINE

- VOLLHARTMETALL, 3&4 SCHNEIDEN 20° RECHTSSPIRALE LANG SCHRUPPFRÄSER - FEIN
- ① Fraise carbure, 3&4-dents ébauche, hélice 20°, pas fin, longue
- ② 3 - 4 TAGLIENTI, BOMBATO FINE PER SGROSSATURA, ELICA 20° SERIE LUNGA

- ▶ Designed to machine tool steels, alloy steels, mold steels and other hardened materials.
- ▶ High velocity milling of hardened steels.
- ▶ For dry and wet milling.
- ▶ Fast chip ejection.

- ▶ Zur Bearbeitung von Werkzeugstählen, Legierten Stählen, Stahlguß und gehärteten Stählen.
- ▶ Hochgeschwindigkeitsfräsen von gehärteten Stählen.
- ▶ Für Trocken - und Nassfräsen.
- ▶ Schnelle Spanabfuhr.

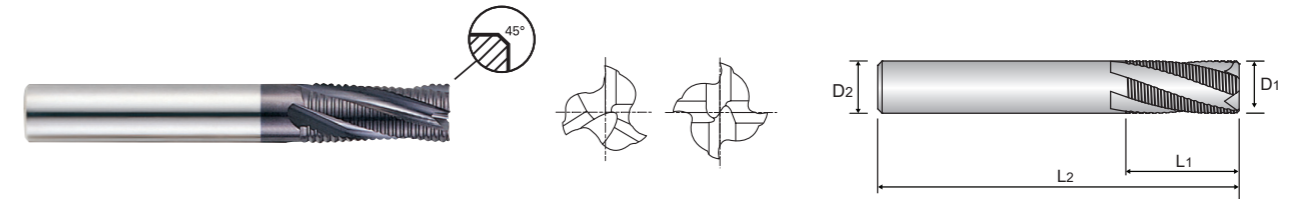


Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	No. of Flute	Chamfer
	D1	D2	L1	L2		
GM814060	6.0	6	16	57	3	0.38
GM814080	8.0	8	16	63	3	0.38
GM814100	10.0	10	22	72	4	0.60
GM814120	12.0	12	26	83	4	0.60
GM814160	16.0	16	32	92	4	0.60
GM814200	20.0	20	38	104	4	0.60

Tolerances according to DIN 7160 & 7161

	Tolerance range in μm				
	Nominal-Diameter in mm				
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30
h10	0	0	0	0	0
	- 40	- 48	- 58	- 70	- 84
h5	0	0	0	0	0
	- 4	- 5	- 6	- 8	- 9

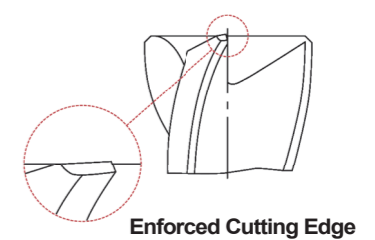

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	○	◎	◎	○	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○



RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER


GM876, GM813 SERIES 2 FLUTE BALL NOSE

Vc = m/min.
fz = mm/tooth
RPM = rev/min.
FEED = mm/min
Ap = mm

NORMAL SPEED

Table with columns: ISO, VDI 3323, Material Description, Ae, Parameter, Diameter (Ø) (1.0 to 20.0), Vc, fz, RPM, FEED, Ap. Rows include Non-alloy steel, Low alloy steel, High alloyed steel, and tool steel, and Grey cast iron.

▶ NEXT PAGE




RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

GM876, GM813 SERIES 2 FLUTE BALL NOSE

Vc = m/min.
fz = mm/tooth
RPM = rev/min.
FEED = mm/min
Ap = mm

HIGH SPEED

Table with columns: ISO, VDI 3323, Material Description, Ae, Parameter, Diameter (Ø) (1.0 to 20.0), Vc, fz, RPM, FEED, Ap. Rows include Non-alloy steel, Low alloy steel, High alloyed steel, and tool steel, and Grey cast iron.



HSS

HSS



RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER



RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

GM886 SERIES 2 FLUTE BALL NOSE RIB PROCESSING

GM886 SERIES 2 FLUTE BALL NOSE RIB PROCESSING



Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min
Ap = mm

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min
Ap = mm

Table with columns: ISO, VDI 3323, Material Description, Parameter, Diameter (Ø) (0.5, 0.6, 0.8, 1.0, 1.2, 1.4). Rows include Non-alloy steel, Low alloy steel, High alloyed steel, and tool steel, and Grey cast iron, Nodular cast iron, Malleable cast iron, Hardened steel, and Chilled Cast Iron.

Table with columns: VDI 3323, Diameter (Ø) (1.5, 1.6, 1.8, 2.0, 3.0, 4.0, 5.0, 6.0). Rows include 1-4, 5, 6-7, 8-9, 10, 11.1-11.2, 15-20, 38.1-38.2, 40, and 41.

▶ NEXT PAGE

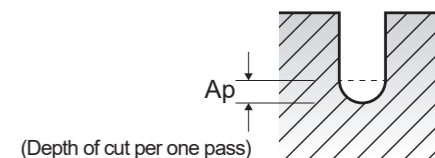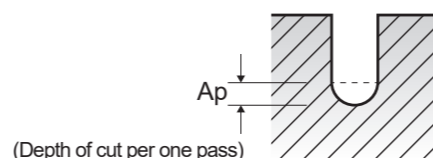


GM902 SERIES 2 FLUTE BALL NOSE with TAPER NECK

NORMAL SPEED

ISO	VDI 3323	Material Description	Ae	Parameter	Diameter (Ø)						
					1.0	2.0	3.0	4.0	5.0	6.0	8.0
H	5	Non-alloy steel	0.2D	Vc	35	60	80	90	95	110	120
				fz	0.008	0.014	0.023	0.031	0.040	0.060	0.080
				RPM	11141	9549	8488	7162	6048	5836	4775
				FEED	178	267	390	444	484	700	764
	Ap	0.2	0.2	0.2	0.2	0.2	0.2	0.3			
	8-9	Low alloy steel	0.2D	Vc	35	60	80	90	95	110	120
				fz	0.008	0.014	0.023	0.031	0.040	0.060	0.080
				RPM	11141	9549	8488	7162	6048	5836	4775
				FEED	178	267	390	444	484	700	764
	Ap	0.2	0.2	0.2	0.2	0.2	0.2	0.3			
	11.1	High alloyed steel, and tool steel	0.2D	Vc	35	60	80	90	95	110	120
				fz	0.008	0.014	0.023	0.031	0.040	0.060	0.080
RPM				11141	9549	8488	7162	6048	5836	4775	
FEED				178	267	390	444	484	700	764	
Ap	0.2	0.2	0.2	0.2	0.2	0.2	0.3				
11.2	High alloyed steel, and tool steel	0.1D	Vc	55	75	100	110	125	135	150	
			fz	0.012	0.028	0.043	0.052	0.059	0.067	0.075	
			RPM	17507	11937	10610	8754	7958	7162	5968	
			FEED	420	668	912	910	939	960	895	
Ap	0.05	0.1	0.15	0.2	0.25	0.25	0.25				
H	38.1	Hardened steel	0.1D	Vc	55	75	100	110	125	135	150
				fz	0.012	0.028	0.043	0.052	0.059	0.067	0.075
				RPM	17507	11937	10610	8754	7958	7162	5968
				FEED	420	668	912	910	939	960	895
	Ap	0.05	0.1	0.15	0.2	0.25	0.25	0.25			
	38.2	Hardened steel	0.1D	Vc	55	75	95	110	125	130	140
				fz	0.012	0.026	0.043	0.052	0.059	0.068	0.075
				RPM	17507	11937	10080	8754	7958	6897	5570
				FEED	420	621	867	910	939	938	836
	Ap	0.05	0.1	0.15	0.2	0.25	0.25	0.25			
	40	Chilled Cast Iron	0.1D	Vc	55	75	100	110	125	135	150
				fz	0.012	0.028	0.043	0.052	0.059	0.067	0.075
RPM				17507	11937	10610	8754	7958	7162	5968	
FEED				420	668	912	910	939	960	895	
Ap	0.05	0.1	0.15	0.2	0.25	0.25	0.25				
41	Hardened Cast Iron	0.1D	Vc	55	75	95	110	125	130	140	
			fz	0.012	0.026	0.043	0.052	0.059	0.068	0.075	
			RPM	17507	11937	10080	8754	7958	6897	5570	
			FEED	420	621	867	910	939	938	836	
Ap	0.05	0.1	0.15	0.2	0.25	0.25	0.25				

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min
Ap = mm

▶ NEXT PAGE




GM902 SERIES 2 FLUTE BALL NOSE with TAPER NECK

HIGH SPEED

ISO	VDI 3323	Material Description	Ae	Parameter	Diameter (Ø)						
					1.0	2.0	3.0	4.0	5.0	6.0	8.0
P	1-5	Non-alloy steel	0.05D	Vc	65	110	165	220	275	335	355
				fz	0.026	0.036	0.048	0.07	0.086	0.095	0.119
				RPM	20690	17507	17507	17507	17507	17772	14125
				FEED	1076	1261	1681	2451	3011	3377	3362
	Ap	0.2	0.2	0.2	0.2	0.2	0.2	0.3			
	6-9	Low alloy steel	0.05D	Vc	65	110	165	220	275	335	355
				fz	0.026	0.036	0.048	0.070	0.086	0.095	0.119
				RPM	20690	17507	17507	17507	17507	17772	14125
				FEED	1076	1261	1681	2451	3011	3377	3362
	Ap	0.2	0.2	0.2	0.2	0.2	0.2	0.3			
	10-11.2	High alloyed steel, and tool steel	0.05D	Vc	65	110	165	220	275	335	355
				fz	0.026	0.036	0.048	0.07	0.086	0.095	0.119
RPM				20690	17507	17507	17507	17507	17772	14125	
FEED				1076	1261	1681	2451	3011	3377	3362	
Ap	0.2	0.2	0.2	0.2	0.2	0.2	0.3				
K	15-20 Grey cast iron Nodular cast iron Malleable cast iron	0.05D	Vc	65	110	165	220	275	335	355	
			fz	0.026	0.036	0.048	0.07	0.086	0.095	0.119	
			RPM	20690	17507	17507	17507	17507	17772	14125	
			FEED	1076	1261	1681	2451	3011	3377	3362	
Ap	0.2	0.2	0.2	0.2	0.2	0.2	0.3				
H	38	Hardened steel	0.05D	Vc	55	75	100	110	125	135	150
				fz	0.019	0.037	0.069	0.080	0.088	0.101	0.112
				RPM	17507	11937	10610	8754	7958	7162	5968
				FEED	665	883	1464	1401	1401	1447	1337
	Ap	0.05	0.10	0.15	0.2	0.25	0.25	0.25			
	38.2	Hardened steel	0.05D	Vc	55	75	95	110	120	130	140
				fz	0.017	0.043	0.066	0.079	0.087	0.102	0.109
				RPM	17507	11937	10080	8754	7639	6897	5570
				FEED	595	1027	1331	1383	1329	1407	1214
	Ap	0.05	0.10	0.15	0.2	0.25	0.25	0.25			
	40	Chilled Cast Iron	0.05D	Vc	65	110	165	220	275	335	355
				fz	0.026	0.036	0.048	0.07	0.086	0.095	0.119
RPM				20690	17507	17507	17507	17507	17772	14125	
FEED				1076	1261	1681	2451	3011	3377	3362	
Ap	0.2	0.2	0.2	0.2	0.2	0.2	0.3				
41	Hardened Cast Iron	0.05D	Vc	55	75	95	110	120	130	140	
			fz	0.017	0.043	0.066	0.079	0.087	0.102	0.109	
			RPM	17507	11937	10080	8754	7639	6897	5570	
			FEED	595	1027	1331	1383	1329	1407	1214	
Ap	0.05	0.10	0.15	0.2	0.25	0.25	0.25				

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min
Ap = mm





RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER



RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

GM815 SERIES 4 FLUTE BALL NOSE

NORMAL SPEED

ISO	VDI 3323	Material Description	Ae	Parameter	Diameter (Ø)								
					2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0	16.0
P	1-4	Non-alloy steel	0.2D	Vc	105	130	140	150	170	190	210	230	250
				fz	0.013	0.019	0.026	0.034	0.045	0.068	0.09	0.111	0.136
				RPM	16711	13793	11141	9549	9019	7560	6685	6101	4974
				FEED	869	1048	1159	1299	1623	2056	2406	2709	2706
	Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3		
	5	Non-alloy steel	0.2D	Vc	75	100	110	120	135	150	170	185	200
				fz	0.010	0.017	0.024	0.030	0.045	0.060	0.075	0.089	0.106
				RPM	11937	10610	8754	7639	7162	5968	5411	4907	3979
				FEED	477	722	840	917	1289	1432	1623	1747	1687
	Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3		
6-7	Low alloy steel	0.2D	Vc	105	130	140	150	170	190	210	230	250	
			fz	0.013	0.019	0.026	0.034	0.045	0.068	0.09	0.111	0.136	
			RPM	16711	13793	11141	9549	9019	7560	6685	6101	4974	
			FEED	869	1048	1159	1299	1623	2056	2406	2709	2706	
Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3			
8-9	Low alloy steel	0.2D	Vc	75	100	110	120	135	150	170	185	200	
			fz	0.010	0.017	0.024	0.030	0.045	0.060	0.075	0.089	0.106	
			RPM	11937	10610	8754	7639	7162	5968	5411	4907	3979	
			FEED	477	722	840	917	1289	1432	1623	1747	1687	
Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3			
10	High alloyed steel, and tool steel	0.2D	Vc	105	130	140	150	170	190	210	230	250	
			fz	0.013	0.019	0.026	0.034	0.045	0.068	0.09	0.111	0.136	
			RPM	16711	13793	11141	9549	9019	7560	6685	6101	4974	
			FEED	869	1048	1159	1299	1623	2056	2406	2709	2706	
Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3			
11.1 - 11.2	High alloyed steel, and tool steel	0.2D	Vc	75	100	110	120	135	150	170	185	200	
			fz	0.010	0.017	0.024	0.030	0.045	0.060	0.075	0.089	0.106	
			RPM	11937	10610	8754	7639	7162	5968	5411	4907	3979	
			FEED	477	722	840	917	1289	1432	1623	1747	1687	
Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3			
K	15-20	Grey cast iron, Nodular cast iron, Malleable cast iron	0.2D	Vc	105	130	140	150	170	190	210	230	250
				fz	0.013	0.019	0.026	0.034	0.045	0.068	0.09	0.111	0.136
				RPM	16711	13793	11141	9549	9019	7560	6685	6101	4974
				FEED	869	1048	1159	1299	1623	2056	2406	2709	2706
Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3			
H	38.1 - 39.2	Hardened steel	0.1D	Vc	30	45	55	60	65	65	70	70	
				fz	0.008	0.012	0.016	0.018	0.022	0.033	0.041	0.053	0.069
				RPM	4775	4775	4377	3820	3448	2586	2069	1857	1393
				FEED	153	229	280	275	303	341	339	394	384
	Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3		
	40	Chilled Cast Iron	0.2D	Vc	75	100	110	120	135	150	170	185	200
				fz	0.01	0.017	0.024	0.03	0.045	0.06	0.075	0.089	0.106
				RPM	11937	10610	8754	7639	7162	5968	5411	4907	3979
				FEED	477	722	840	917	1289	1432	1623	1747	1687
	Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3		
	41	Hardened Cast Iron	0.1D	Vc	30	45	55	60	65	65	70	70	
				fz	0.008	0.012	0.016	0.018	0.022	0.033	0.041	0.053	0.069
RPM				4775	4775	4377	3820	3448	2586	2069	1857	1393	
FEED				153	229	280	275	303	341	339	394	384	
Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3			

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min
Ap = mm



GM815 SERIES 4 FLUTE BALL NOSE

HIGH SPEED

ISO	VDI 3323	Material Description	Ae	Parameter	Diameter (Ø)								
					2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0	16.0
P	1-5	Non-alloy steel	0.05D	Vc	140	210	275	345	415	440	460	485	505
				fz	0.026	0.036	0.052	0.064	0.071	0.09	0.105	0.12	0.136
				RPM	22282	22282	21884	21963	22016	17507	14642	12865	10047
				FEED	2317	3209	4552	5623	6253	6303	6150	6175	5465
	Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3		
	6-9	Low alloy steel	0.05D	Vc	140	210	275	345	415	440	460	485	505
				fz	0.026	0.036	0.052	0.064	0.071	0.09	0.105	0.12	0.136
				RPM	22282	22282	21884	21963	22016	17507	14642	12865	10047
				FEED	2317	3209	4552	5623	6253	6303	6150	6175	5465
	Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3		
	10 - 11.2	High alloyed steel, and tool steel	0.05D	Vc	140	210	275	345	415	440	460	485	505
				fz	0.026	0.036	0.052	0.064	0.071	0.09	0.105	0.12	0.136
RPM				22282	22282	21884	21963	22016	17507	14642	12865	10047	
FEED				2317	3209	4552	5623	6253	6303	6150	6175	5465	
Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3			
K	15-20	Grey cast iron, Nodular cast iron, Malleable cast iron	0.05D	Vc	140	210	275	345	415	440	460	485	505
				fz	0.026	0.036	0.052	0.064	0.071	0.09	0.105	0.12	0.136
				RPM	22282	22282	21884	21963	22016	17507	14642	12865	10047
				FEED	2317	3209	4552	5623	6253	6303	6150	6175	5465
Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3			
H	38.1 - 39.2	Hardened steel	0.05D	Vc	140	170	180	200	210	220	230	240	250
				fz	0.017	0.023	0.032	0.038	0.045	0.056	0.064	0.071	0.079
				RPM	22282	18038	14324	12732	11141	8754	7321	6366	4974
				FEED	1515	1659	1833	1935	2005	1961	1874	1808	1572
Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3			
H	40	Chilled Cast Iron	0.05D	Vc	140	210	275	345	415	440	460	485	505
				fz	0.026	0.036	0.052	0.064	0.071	0.09	0.105	0.12	0.136
				RPM	22282	22282	21884	21963	22016	17507	14642	12865	10047
				FEED	2317	3209	4552	5623	6253	6303	6150	6175	5465
Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3			
H	41	Hardened Cast Iron	0.05D	Vc	140	170	180	200	210	220	230	240	250
				fz	0.017	0.023	0.032	0.038	0.045	0.056	0.064	0.071	0.079
				RPM	22282	18038	14324	12732	11141	8754	7321	6366	4974
				FEED	1515	1659	1833	1935	2005	1961	1874	1808	1572
Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3			

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min
Ap = mm


▶ NEXT PAGE



GM818 SERIES 2 FLUTE CORNER RADIUS - **SLOTING**

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)					
						4.0	5.0	6.0	8.0	10.0	12.0
P	1-4	Non-alloy steel	1.0D	0.3D	Vc	75	80	80	85	85	85
					fz	0.016	0.023	0.032	0.045	0.053	0.051
					RPM	5968	5093	4244	3382	2706	2255
					FEED	191	234	272	304	287	230
	5	Non-alloy steel	1.0D	0.3D	Vc	45	50	50	55	55	60
					fz	0.013	0.017	0.025	0.033	0.039	0.041
					RPM	3581	3183	2653	2188	1751	1592
					FEED	93	108	133	144	137	131
	6-7	Low alloy steel	1.0D	0.3D	Vc	75	80	80	85	85	85
					fz	0.016	0.023	0.032	0.045	0.053	0.051
					RPM	5968	5093	4244	3382	2706	2255
					FEED	191	234	272	304	287	230
8-9	Low alloy steel	1.0D	0.3D	Vc	45	50	50	55	55	60	
				fz	0.013	0.017	0.025	0.033	0.039	0.041	
				RPM	3581	3183	2653	2188	1751	1592	
				FEED	93	108	133	144	137	131	
10	High alloyed steel, and tool steel	1.0D	0.3D	Vc	75	80	80	85	85	85	
				fz	0.016	0.023	0.032	0.045	0.053	0.051	
				RPM	5968	5093	4244	3382	2706	2255	
				FEED	191	234	272	304	287	230	
11.1 11.2	High alloyed steel, and tool steel	1.0D	0.3D	Vc	45	50	50	55	55	60	
				fz	0.013	0.017	0.025	0.033	0.039	0.041	
				RPM	3581	3183	2653	2188	1751	1592	
				FEED	93	108	133	144	137	131	
K	15-20	Grey cast iron Nodular cast iron Malleable cast iron	1.0D	0.3D	Vc	75	80	80	85	85	85
					fz	0.016	0.023	0.032	0.045	0.053	0.051
					RPM	5968	5093	4244	3382	2706	2255
					FEED	191	234	272	304	287	230
H	38.1 38.2	Hardened steel	1.0D	0.3D	Vc	30	35	35	35	35	35
					fz	0.006	0.008	0.010	0.013	0.016	0.019
					RPM	2387	2228	1857	1393	1114	928
					FEED	29	36	37	36	36	35
	40	Chilled Cast Iron	1.0D	0.3D	Vc	45	50	50	55	55	60
					fz	0.013	0.017	0.025	0.033	0.039	0.041
					RPM	3581	3183	2653	2188	1751	1592
					FEED	93	108	133	144	137	131
	41	Hardened Cast Iron	1.0D	0.3D	Vc	30	35	35	35	35	35
					fz	0.006	0.008	0.010	0.013	0.016	0.019
					RPM	2387	2228	1857	1393	1114	928
					FEED	29	36	37	36	36	35




GM8A1 SERIES 2 FLUTE CORNER RADIUS RIB PROCESSING

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.
Ap = mm

ISO	VDI 3323	Material Description	Parameter	Diameter (Ø)					
				1.0	1.2	1.4	1.5	1.6	1.8
P	1-4	Non-alloy steel	Vc	71~88	70~85	70~88	68~87	70~90	74~93
			fz	0.006~0.014	0.008~0.020	0.009~0.023	0.010~0.024	0.010~0.025	0.011~0.027
			RPM	23630~29400	19430~23630	16800~21000	15230~19430	14700~18900	13650~17330
			FEED	295~850	295~945	295~945	295~945	295~945	295~945
	5	Non-alloy steel	Vc	49~63	49~62	51~62	49~64	51~64	52~65
			fz	0.006~0.015	0.007~0.018	0.008~0.021	0.009~0.022	0.009~0.023	0.010~0.026
			RPM	16490~21000	13650~17330	12080~14700	11030~14180	10710~13440	9660~12080
			FEED	200~630	200~630	200~630	200~630	200~630	200~630
	6-7	Low alloy steel	Vc	71~88	70~85	70~88	68~87	70~90	74~93
			fz	0.006~0.014	0.008~0.020	0.009~0.023	0.010~0.024	0.010~0.025	0.011~0.027
			RPM	23630~29400	19430~23630	16800~21000	15230~19430	14700~18900	13650~17330
			FEED	295~850	295~945	295~945	295~945	295~945	295~945
8-9	Low alloy steel	Vc	49~63	49~62	51~62	49~64	51~64	52~65	
		fz	0.006~0.015	0.007~0.018	0.008~0.021	0.009~0.022	0.009~0.023	0.010~0.026	
		RPM	16490~21000	13650~17330	12080~14700	11030~14180	10710~13440	9660~12080	
		FEED	200~630	200~630	200~630	200~630	200~630	200~630	
10	High alloyed steel, and tool steel	Vc	71~88	70~85	70~88	68~87	70~90	74~93	
		fz	0.006~0.014	0.008~0.020	0.009~0.023	0.010~0.024	0.010~0.025	0.011~0.027	
		RPM	23630~29400	19430~23630	16800~21000	15230~19430	14700~18900	13650~17330	
		FEED	295~850	295~945	295~945	295~945	295~945	295~945	
11.1 11.2	High alloyed steel, and tool steel	Vc	49~63	49~62	51~62	49~64	51~64	52~65	
		fz	0.006~0.015	0.007~0.018	0.008~0.021	0.009~0.022	0.009~0.023	0.010~0.026	
		RPM	16490~21000	13650~17330	12080~14700	11030~14180	10710~13440	9660~12080	
		FEED	200~630	200~630	200~630	200~630	200~630	200~630	
K	15-20	Grey cast iron Nodular cast iron Malleable cast iron	Vc	71~88	70~85	70~88	68~87	70~90	74~93
			fz	0.006~0.014	0.008~0.020	0.009~0.023	0.010~0.024	0.010~0.025	0.011~0.027
			RPM	23630~29400	19430~23630	16800~21000	15230~19430	14700~18900	13650~17330
			FEED	295~850	295~945	295~945	295~945	295~945	295~945
H	38.1 38.2	Hardened steel	Vc	31~39	31~40	32~40	32~39	32~40	32~41
			fz	0.003~0.005	0.004~0.006	0.005~0.007	0.005~0.008	0.005~0.008	0.006~0.009
			RPM	10500~13130	8720~11030	7560~9450	7040~8610	6720~8400	5990~7560
			FEED	70~135	70~135	70~135	70~135	70~135	70~135
	40	Chilled Cast Iron	Vc	49~63	49~62	51~62	49~64	51~64	52~65
			fz	0.006~0.015	0.007~0.018	0.008~0.021	0.009~0.022	0.009~0.023	0.010~0.026
			RPM	16490~21000	13650~17330	12080~14700	11030~14180	10710~13440	9660~12080
			FEED	200~630	200~630	200~630	200~630	200~630	200~630
	41	Hardened Cast Iron	Vc	31~39	31~40	32~40	32~39	32~40	32~41
			fz	0.003~0.005	0.004~0.006	0.005~0.007	0.005~0.008	0.005~0.008	0.006~0.009
			RPM	10500~13130	8720~11030	7560~9450	7040~8610	6720~8400	5990~7560
			FEED	70~135	70~135	70~135	70~135	70~135	70~135


▶ NEXT PAGE

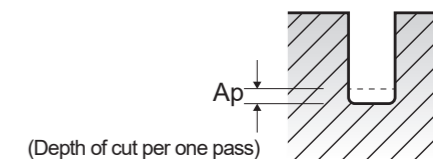

GM8A1 SERIES 2 FLUTE CORNER RADIUS RIB PROCESSING

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min
Ap = mm


ISO	VDI 3323	Material Description	Parameter	Diameter (Ø)					
				2.0	2.5	3.0	4.0	5.0	6.0
P	1-4	Non-alloy steel	Vc	75~91	75~94	75~94	75~94	75~94	75~94
			fz	0.012~0.031	0.015~0.038	0.018~0.045	0.023~0.060	0.029~0.075	0.035~0.090
			RPM	12600~15230	9980~12600	8400~10500	6300~7880	5040~6300	4200~5250
			FEED	295~945	295~945	295~945	295~945	295~945	295~945
			Ap	0.090~0.180	0.112~0.235	0.135~0.270	0.180~0.360	0.225~0.450	0.270~0.540
	5	Non-alloy steel	Vc	52~66	53~67	52~66	52~67	52~66	53~66
			fz	0.011~0.029	0.014~0.035	0.017~0.043	0.023~0.057	0.029~0.071	0.034~0.086
			RPM	8720~11030	7040~8930	5780~7350	4310~5570	3470~4410	2940~3680
			FEED	200~630	200~630	200~630	200~630	200~630	200~630
			Ap	0.090~0.180	0.112~0.235	0.135~0.270	0.180~0.360	0.225~0.450	0.270~0.540
	6-7	Low alloy steel	Vc	75~91	75~94	75~94	75~94	75~94	75~94
			fz	0.012~0.031	0.015~0.038	0.018~0.045	0.023~0.060	0.029~0.075	0.035~0.090
			RPM	12600~15230	9980~12600	8400~10500	6300~7880	5040~6300	4200~5250
			FEED	295~945	295~945	295~945	295~945	295~945	295~945
			Ap	0.090~0.180	0.112~0.235	0.135~0.270	0.180~0.360	0.225~0.450	0.270~0.540
	8-9	Low alloy steel	Vc	52~66	53~67	52~66	52~67	52~66	53~66
			fz	0.011~0.029	0.014~0.035	0.017~0.043	0.023~0.057	0.029~0.071	0.034~0.086
			RPM	8720~11030	7040~8930	5780~7350	4310~5570	3470~4410	2940~3680
			FEED	200~630	200~630	200~630	200~630	200~630	200~630
			Ap	0.090~0.180	0.112~0.235	0.135~0.270	0.180~0.360	0.225~0.450	0.270~0.540
10	High alloyed steel, and tool steel	Vc	75~91	75~94	75~94	75~94	75~94	75~94	
		fz	0.012~0.031	0.015~0.038	0.018~0.045	0.023~0.060	0.029~0.075	0.035~0.090	
		RPM	12600~15230	9980~12600	8400~10500	6300~7880	5040~6300	4200~5250	
		FEED	295~945	295~945	295~945	295~945	295~945	295~945	
		Ap	0.090~0.180	0.112~0.235	0.135~0.270	0.180~0.360	0.225~0.450	0.270~0.540	
11.1-11.2	High alloyed steel, and tool steel	Vc	52~66	53~67	52~66	52~67	52~66	53~66	
		fz	0.011~0.029	0.014~0.035	0.017~0.043	0.023~0.057	0.029~0.071	0.034~0.086	
		RPM	8720~11030	7040~8930	5780~7350	4310~5570	3470~4410	2940~3680	
		FEED	200~630	200~630	200~630	200~630	200~630	200~630	
		Ap	0.090~0.180	0.112~0.235	0.135~0.270	0.180~0.360	0.225~0.450	0.270~0.540	
K 15-20	Grey cast iron Nodular cast iron Malleable cast iron	Vc	75~91	75~94	75~94	75~94	75~94	75~94	
		fz	0.012~0.031	0.015~0.038	0.018~0.045	0.023~0.060	0.029~0.075	0.035~0.090	
		RPM	12600~15230	9980~12600	8400~10500	6300~7880	5040~6300	4200~5250	
		FEED	295~945	295~945	295~945	295~945	295~945	295~945	
		Ap	0.090~0.180	0.112~0.235	0.135~0.270	0.180~0.360	0.225~0.450	0.270~0.540	
H	38.1-38.2	Hardened steel	Vc	33~41	34~42	33~41	33~41	33~41	33~41
			fz	0.006~0.010	0.008~0.012	0.009~0.015	0.013~0.020	0.015~0.025	0.019~0.025
			RPM	5570~6930	4520~5570	3680~4620	2730~3470	2210~2730	1840~2730
			FEED	70~135	70~135	70~135	70~135	70~135	70~135
			Ap	0.018~0.035	0.022~0.045	0.028~0.055	0.036~0.072	0.045~0.090	0.054~0.108
	40	Chilled Cast Iron	Vc	52~66	53~67	52~66	52~67	52~66	53~66
			fz	0.011~0.029	0.014~0.035	0.017~0.043	0.023~0.057	0.029~0.071	0.034~0.086
			RPM	8720~11030	7040~8930	5780~7350	4310~5570	3470~4410	2940~3680
			FEED	200~630	200~630	200~630	200~630	200~630	200~630
			Ap	0.090~0.180	0.112~0.235	0.135~0.270	0.180~0.360	0.225~0.450	0.270~0.540
	41	Hardened Cast Iron	Vc	33~41	34~42	33~41	33~41	33~41	33~41
			fz	0.006~0.010	0.008~0.012	0.009~0.015	0.013~0.020	0.015~0.025	0.019~0.025
			RPM	5570~6930	4520~5570	3680~4620	2730~3470	2210~2730	1840~2730
			FEED	70~135	70~135	70~135	70~135	70~135	70~135
			Ap	0.018~0.035	0.022~0.045	0.028~0.055	0.036~0.072	0.045~0.090	0.054~0.108



GM839 SERIES 4 FLUTE CORNER RADIUS - SIDE CUTTING

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)						
						2.0	3.0	4.0	6.0	8.0	10.0	12.0
P	1-4	Non-alloy steel	0.05D	1.0D	Vc	95	110	125	140	140	135	135
					fz	0.006	0.009	0.019	0.03	0.042	0.047	0.048
	5	Non-alloy steel	0.05D	1.0D	RPM	15120	11671	9947	7427	5570	4297	3581
					FEED	363	420	756	891	936	808	688
	6-7	Low alloy steel	0.05D	1.0D	Vc	65	70	75	85	85	85	85
					fz	0.006	0.009	0.019	0.030	0.038	0.037	0.037
	8-9	Low alloy steel	0.05D	1.0D	RPM	10345	7427	5968	4509	3382	2706	2255
					FEED	248	267	454	541	514	400	334
	10	High alloyed steel, and tool steel	0.05D	1.0D	Vc	95	110	125	140	140	135	135
					fz	0.006	0.009	0.019	0.03	0.042	0.047	0.048
11.1-11.2	High alloyed steel, and tool steel	0.05D	1.0D	RPM	15120	11671	9947	7427	5570	4297	3581	
				FEED	363	420	756	891	936	808	688	
K 15-20	Grey cast iron Nodular cast iron Malleable cast iron	0.05D	1.0D	Vc	95	110	125	140	140	135	135	
				fz	0.006	0.009	0.019	0.03	0.042	0.047	0.048	
				RPM	15120	11671	9947	7427	5570	4297	3581	
H	38.1-38.2	Hardened steel	0.05D	1.0D	FEED	363	420	756	891	936	808	688
					Vc	40	40	50	50	55	55	60
					fz	0.002	0.004	0.005	0.010	0.016	0.017	0.017
	40	Chilled Cast Iron	0.05D	1.0D	RPM	6366	4244	3979	2653	2188	1751	1592
					FEED	51	68	80	106	140	119	108
					Vc	65	70	75	85	85	85	85
	41	Hardened Cast Iron	0.05D	1.0D	fz	0.006	0.009	0.019	0.030	0.038	0.037	0.037
					RPM	10345	7427	5968	4509	3382	2706	2255
					FEED	248	267	454	541	514	400	334
	41	Hardened Cast Iron	0.05D	1.0D	Vc	40	40	50	50	55	55	60
					fz	0.002	0.004	0.005	0.010	0.016	0.017	0.017
					RPM	6366	4244	3979	2653	2188	1751	1592
	FEED	51	68	80	106	140	119	108				




YG X-POWER PRO
END MILLS

RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

GM811 SERIES 4 FLUTE - SIDE CUTTING

Vc = m/min.
fz = mm/tooth
RPM = rev/min.
FEED = mm/min.

Table with columns for ISO, VDI 3323, Material Description, Ae, Ap, Parameter, Diameter (Ø) [2.0, 3.0, 4.0, 5.0, 6.0, 8.0, 10.0, 12.0, 16.0, 20.0, 25.0], and rows for Vc, fz, RPM, FEED. Rows are categorized by ISO P (Non-alloy steel, Low alloy steel, High alloyed steel and tool steel), M (Stainless steel), K (Grey cast iron, Nodular cast iron, Malleable cast iron), and H (Hardened steel, Chilled Cast Iron, Hardened Cast Iron).




YG X-POWER PRO
END MILLS

RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

GM817 SERIES 4 FLUTE - SIDE CUTTING

Vc = m/min.
fz = mm/tooth
RPM = rev/min.
FEED = mm/min.

Table with columns for ISO, VDI 3323, Material Description, Ae, Ap, Parameter, Diameter (Ø) [2.0, 3.0, 4.0, 5.0, 6.0, 8.0, 10.0, 12.0, 16.0, 20.0], and rows for Vc, fz, RPM, FEED. Rows are categorized by ISO P (Non-alloy steel, Low alloy steel, High alloyed steel and tool steel), K (Grey cast iron, Nodular cast iron, Malleable cast iron), and H (Hardened steel, Chilled Cast Iron, Hardened Cast Iron).



GM814 SERIES **3&4 FLUTE ROUGHING - SIDE CUTTING**

Vc = m/min.
fz = mm/tooth
RPM = rev/min.
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)					
						6.0	8.0	10.0	12.0	16.0	20.0
P	1-4	Non-alloy steel	0.3D	1.5D	Vc	310	305	305	315	315	315
					fz	0.05	0.067	0.063	0.075	0.1	0.113
	RPM				16446	12136	9708	8356	6267	5013	
	FEED				2467	2439	2447	2507	2507	2266	
	Vc				245	245	250	240	255	240	
	fz				0.023	0.030	0.028	0.033	0.040	0.039	
	5	Low alloy steel	0.3D	1.5D	RPM	12998	9748	7958	6366	5073	3820
					FEED	897	877	891	840	812	596
	Vc				310	305	305	315	315	315	
	fz				0.05	0.067	0.063	0.075	0.1	0.113	
	RPM				16446	12136	9708	8356	6267	5013	
	FEED				2467	2439	2447	2507	2507	2266	
6-7	High alloyed steel, and tool steel	0.3D	1.5D	Vc	245	245	250	240	255	240	
				fz	0.023	0.030	0.028	0.033	0.040	0.039	
RPM				12998	9748	7958	6366	5073	3820		
FEED				897	877	891	840	812	596		
Vc				310	305	305	315	315	315		
fz				0.05	0.067	0.063	0.075	0.1	0.113		
8-9	High alloyed steel, and tool steel	0.3D	1.5D	RPM	16446	12136	9708	8356	6267	5013	
				FEED	2467	2439	2447	2507	2507	2266	
Vc				245	245	250	240	255	240		
fz				0.023	0.030	0.028	0.033	0.040	0.039		
RPM				12998	9748	7958	6366	5073	3820		
FEED				897	877	891	840	812	596		
10	Stainless steel	0.3D	1.5D	Vc	310	305	305	315	315	315	
				fz	0.05	0.067	0.063	0.075	0.1	0.113	
RPM				16446	12136	9708	8356	6267	5013		
FEED				2467	2439	2447	2507	2507	2266		
Vc				245	245	250	240	255	240		
fz				0.023	0.030	0.028	0.033	0.040	0.039		
11.1 - 11.2	Stainless steel	0.3D	1.5D	RPM	12998	9748	7958	6366	5073	3820	
				FEED	897	877	891	840	812	596	
Vc				165	165	170	165	175	160		
fz				0.023	0.03	0.028	0.034	0.039	0.038		
RPM				8754	6565	5411	4377	3482	2546		
FEED				604	591	606	595	543	387		
M	Grey cast iron Nodular cast iron Malleable cast iron	0.3D	1.5D	Vc	310	305	305	315	315	315	
				fz	0.05	0.067	0.063	0.075	0.1	0.113	
RPM				16446	12136	9708	8356	6267	5013		
FEED				2467	2439	2447	2507	2507	2266		
Vc				65	65	65	65	65	65		
fz				0.026	0.033	0.036	0.039	0.034	0.038		
K	Hardened steel	0.3D	1.5D	RPM	3448	2586	2069	1724	1293	1035	
				FEED	269	256	298	269	176	157	
Vc				245	245	250	240	255	240		
fz				0.023	0.030	0.028	0.033	0.040	0.039		
RPM				12998	9748	7958	6366	5073	3820		
FEED				897	877	891	840	812	596		
H	Chilled Cast Iron	0.3D	1.5D	Vc	65	65	65	65	65	65	
				fz	0.026	0.033	0.036	0.039	0.034	0.038	
RPM				3448	2586	2069	1724	1293	1035		
FEED				269	256	298	269	176	157		
Vc				245	245	250	240	255	240		
fz				0.023	0.030	0.028	0.033	0.040	0.039		
41	Hardened Cast Iron	0.05D	1.0D	RPM	12998	9748	7958	6366	5073	3820	
				FEED	897	877	891	840	812	596	
Vc				65	65	65	65	65	65		
fz				0.026	0.033	0.036	0.039	0.034	0.038		
RPM				3448	2586	2069	1724	1293	1035		
FEED				269	256	298	269	176	157		

