



Leading Through Innovation

SOLID CARBIDE

X1-EH END MILLS

X1-EH VHM - FRÄSER

- Highly Accurate Fine-Finishing for High Hardened Steel
- Hochpräzise Feinbearbeitung für hochgehärtete Stähle

SELECTION GUIDE

HSS



SERIES	HPI90	HPI91	HPI92	HPI89	HPI88
FLUTE	2	2	2	2	2
HELIX ANGLE	30°	30°	30°	35°	35°
CUTTING EDGE SHAPE	BALL NOSE	BALL NOSE	BALL NOSE	CORNER RADIUS	SQUARE
SIZE MIN	R0.05	R0.05	R0.05	D0.2	D0.1
SIZE MAX	R10.0	R3.0	R6.0	D3.0	D6.0
PAGE	C87	C88	C98	C107	C114

Scan QR Code to See Catalogue
DIE & MOLD



SOLID CARBIDE
X1-EH
END MILLS

Highly Accurate Fine-Finishing
for High Hardened Steel

Please visit
globalyg1.com/mat
for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : p. C120

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc					
P	1	Non-alloy steel	About 0.15% C Annealed	125	13					
	2		About 0.45% C Annealed	190	13					
	3		About 0.45% C Quenched & tempered	250	25					
	4		About 0.75% C Annealed	270	28					
	5		About 0.75% C Quenched & tempered	300	32	○	○	○	○	○
	6	Low alloy steel	Annealed	180	10					
	7		Quenched & tempered	275	29					
	8		Quenched & tempered	300	32	○	○	○	○	○
	9		Quenched & tempered	350	38	○	○	○	○	○
	10		Annealed	200	15					
	11.1	High alloyed steel, and tool steel	Quenched & Tempered	325	35	○	○	○	○	○
	11.2		Quenched & Tempered	409	44	○	○	○	○	○
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15					
	13		Martensitic Quenched & Tempered	240	23					
	14.1		Austenitic	180	10					
K	15	Grey cast iron	Pearlitic / ferritic	180	10					
	16		Pearlitic (Martensitic)	260	26					
	17	Nodular cast iron	Ferritic	160	3					
	18		Pearlitic	250	25					
	19		Ferritic	130						
20	Malleable cast iron	Pearlitic	230	21						
N	21	Aluminum-wrought alloy	Not Curable	60						
	22		Curable Hardened	100						
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75						
	24		≤ 12% Si, Curable Hardened	90						
	25		> 12% Si, Not Curable	130						
	26		Copper and Copper Alloys (Bronze / Brass)	CuZn, CuSnZn (Brass)	90					
	27		CuSn, lead-free copper and electrolytic copper	100						
	28	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic							
	29		Rubber, Wood, etc.							
	30									
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15					
	32		Fe Based Cured	280	30					
	33		Fe Based Annealed	250	25					
	34		Ni or Co Based Cured	350	38					
	35	Cast	320	34						
	36	Titanium Alloys	Pure Titanium	400 Rm						
	37		Alpha + Beta Alloys Hardened	1050 Rm						
H	38	Hardened steel	Hardened	421-469	45-49	◎	◎	◎	◎	◎
	39		Hardened		66-70	◎	◎	◎	◎	◎
	40	Chilled Cast Iron	Cast	400	42	○	○	○	○	○
	41	Hardened Cast Iron	Hardened	550	55	◎	◎	◎	◎	◎

HSS




PLAIN SHANK **HPI90** SERIES

CARBIDE, 2 FLUTE BALL NOSE

● VOLLHARTMETALL, 2 SCHNEIDEN STIRNRADIUS
○ Fraise carbure, 2 dents, hémisphérique
○ 2 TAGLIENTI, SEMISFERICA

- ▶ Improvement of tool life by applying new coating.
- ▶ Application of tight tolerances for precision machining.

- ▶ Verbesserung der Werkzeugstandzeit durch Aufbringen einer neuen Beschichtung
- ▶ Enge Toleranzen für die Präzisionsbearbeitung

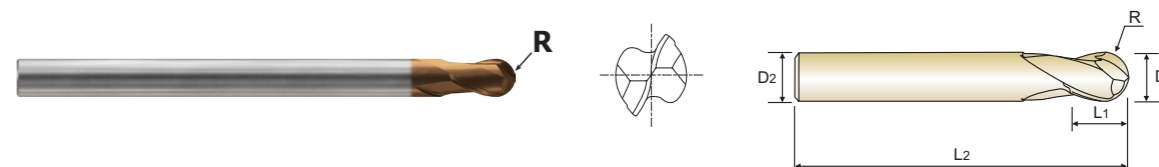

CARBIDE 2 30° R +0.001~-0.005 R +0.003~-0.007 PLAIN Coating p.C120
R0.05-R3 R4-R10 Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	R	D1	D2	L1	L2
HPI90001	R0.05	0.1	4	0.1	50
HPI900015	R0.075	0.15	4	0.15	50
HPI90002	R0.1	0.2	4	0.2	50
HPI90003	R0.15	0.3	4	0.3	50
HPI90004	R0.2	0.4	4	0.6	50
HPI90005	R0.25	0.5	4	0.8	50
HPI90006	R0.3	0.6	4	0.9	50
HPI90008	R0.4	0.8	4	1.2	50
HPI90010	R0.5	1.0	4	1.5	50
HPI90015	R0.75	1.5	4	2.3	50
HPI90020	R1.0	2.0	4	3	60
HPI90025	R1.25	2.5	6	3.8	60
HPI90030	R1.5	3.0	6	5	60
HPI90040	R2.0	4.0	4	6	70
HPI90901	R2.0	4.0	6	6	70
HPI90050	R2.5	5.0	6	8	70
HPI90060	R3.0	6.0	6	10	80
HPI90080	R4.0	8.0	8	12	100
HPI90100	R5.0	10.0	10	15	100
HPI90120	R6.0	12.0	12	18	110
HPI90160	R8.0	16.0	16	24	140
HPI90200	R10.0	20.0	20	30	160

Size	Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to R3	+0.001~-0.005	0~-0.010	h4
over R3	+0.003~-0.007	0~-0.012	* Shank Dia.>φ6 : h5

◎ : Excellent ○ : Good

ISO	P												M						K					
	Non-alloy steel						Low alloy steel						High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20			
HRc	13	25	28	32	38	28	32	38	44	28	32	38	44	28	32	38	44	28	32	38	44			
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230			
Recommend																								


ISO	N								S							H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys			Hardened steel				Chilled Cast Iron	Hardened Cast Iron			
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRc	15	30	25	38	34	15	30	25	38	34	15	30	25	38	34	15	30	45-49	50-55	56-60	61-65	66-70	42	55
HB	60	100	75	90	130	90	100				200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739	400	550	
Recommend																		◎	◎	◎	◎	◎	○	◎

CARBIDE, 2 FLUTE BALL NOSE for RIB PROCESSING

● VOLLHARTMETALL, 2 SCHNEIDEN STIRNRADIUS für SCHMALE RIPPEN
 (●) Fraise carbure, 2 dents, hémisphérique pour usinage de rainure
 (●) 2 TAGLIENTI, SEMISFERICA, SCARICATA PER NERVATURE

- ▶ Improvement of tool life by applying new coating.
- ▶ Application of tight tolerances for precision machining.

- ▶ Verbesserung der Werkzeugstandzeit durch Aufbringen einer neuen Beschichtung
- ▶ Enge Toleranzen für die Präzisionsbearbeitung

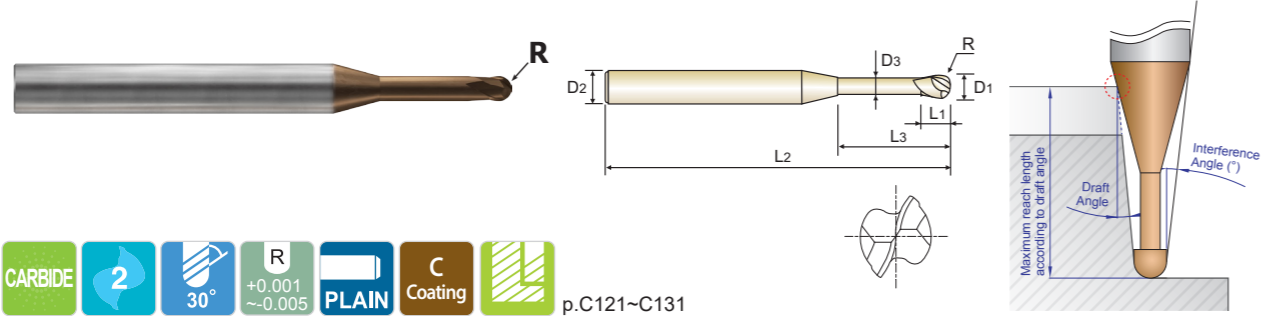

Unit : mm

EDP No.	Radius of Ball Nose		Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Interference Angle(°)	Maximum reach lengths according to draft angle				
	R	D1							0.5°	1°	1.5°	2°	3°
HPI91001	R0.05	0.1	4	0.07	0.2	45	0.085	14.66	0.25	0.26	0.28	0.29	0.32
HPI91901	R0.05	0.1	4	0.07	0.3	45	0.085	14.47	0.36	0.37	0.39	0.41	0.47
HPI91902	R0.05	0.1	4	0.07	0.5	45	0.085	14.11	0.57	0.60	0.63	0.66	0.75
HPI910015	R0.075	0.15	4	0.1	0.3	45	0.135	14.51	0.36	0.37	0.39	0.41	0.46
HPI91903	R0.075	0.15	4	0.1	0.5	45	0.135	14.15	0.57	0.59	0.62	0.66	0.74
HPI91904	R0.075	0.15	4	0.1	1	45	0.135	13.31	1.09	1.15	1.21	1.28	1.45
HPI91002	R0.1	0.2	4	0.15	0.3	45	0.17	14.50	0.40	0.42	0.43	0.46	0.51
HPI91905	R0.1	0.2	4	0.15	0.5	45	0.17	14.13	0.61	0.64	0.67	0.70	0.79
HPI91906	R0.1	0.2	4	0.15	0.75	45	0.17	13.70	0.87	0.92	0.96	1.02	1.15
HPI91907	R0.1	0.2	4	0.15	1	45	0.17	13.29	1.14	1.19	1.26	1.33	1.50
HPI91908	R0.1	0.2	4	0.15	1	50	0.17	13.29	1.14	1.19	1.26	1.33	1.50
HPI91909	R0.1	0.2	4	0.15	1.25	45	0.17	12.90	1.40	1.47	1.55	1.64	1.86
HPI91910	R0.1	0.2	4	0.15	1.5	45	0.17	12.53	1.66	1.75	1.84	1.95	2.21
HPI91911	R0.1	0.2	4	0.15	1.75	45	0.17	12.19	1.93	2.03	2.14	2.26	2.57
HPI91912	R0.1	0.2	4	0.15	2	45	0.17	11.86	2.19	2.30	2.43	2.58	2.92
HPI91913	R0.1	0.2	4	0.15	2.5	45	0.17	11.26	2.71	2.86	3.02	3.20	3.64
HPI91914	R0.1	0.2	4	0.15	3	45	0.17	10.71	3.24	3.41	3.61	3.82	4.35
HPI91915	R0.1	0.2	4	0.2	0.5	35	0.17	14.13	0.61	0.64	0.67	0.70	0.79
HPI91916	R0.1	0.2	4	0.2	0.5	50	0.17	14.13	0.61	0.64	0.67	0.70	0.79
HPI91917	R0.1	0.2	6	0.2	0.5	50	0.17	14.42	0.61	0.64	0.67	0.70	0.79
HPI91003	R0.15	0.3	4	0.2	0.5	45	0.27	14.20	0.61	0.63	0.66	0.69	0.77
HPI91918	R0.15	0.3	4	0.2	0.6	45	0.27	14.02	0.71	0.74	0.78	0.82	0.91
HPI91919	R0.15	0.3	4	0.2	0.75	45	0.27	13.75	0.87	0.91	0.95	1.00	1.12
HPI91920	R0.15	0.3	4	0.2	1	45	0.27	13.33	1.13	1.19	1.25	1.32	1.48
HPI91921	R0.15	0.3	4	0.2	1.25	45	0.27	12.93	1.40	1.47	1.54	1.63	1.84
HPI91922	R0.15	0.3	4	0.2	1.5	45	0.27	12.55	1.66	1.74	1.84	1.94	2.19

▶ NEXT PAGE

Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
+0.001~-0.005	0~-0.010	h4

◎ : Excellent ○ : Good

ISO	P												M				K											
	Non-alloy steel						Low alloy steel						High alloyed steel, and tool steel				Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20							
HRC	13	25	28	32	38	29	32	38	44	15	35	44	15	23	10	10	26	3	25	21								
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230							
Recommend	○						○						○				○				○				○			


ISO	N								S								H													
	Aluminum-wrought alloy				Aluminum-cast, alloyed				Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials				Heat Resistant Super Alloys				Titanium Alloys				Hardened steel				Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41						
HRC											15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	42	55						
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739		400	550						
Recommend	◎								◎								◎								◎				◎	◎

CARBIDE, 2 FLUTE BALL NOSE for RIB PROCESSING

● VOLLHARTMETALL, 2 SCHNEIDEN STIRNRADIUS für SCHMALE RIPPEN
 (●) Fraise carbure, 2 dents, hémisphérique pour usinage de rainure
 (●) 2 TAGLIENTI, SEMISFERICA, SCARICATA PER NERVATURE

- ▶ Improvement of tool life by applying new coating.
- ▶ Application of tight tolerances for precision machining.

- ▶ Verbesserung der Werkzeugstandzeit durch Aufbringen einer neuen Beschichtung
- ▶ Enge Toleranzen für die Präzisionsbearbeitung

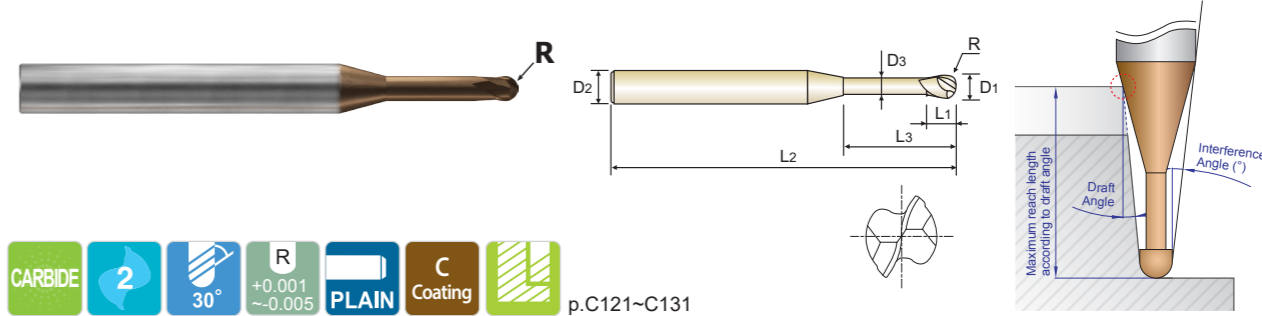

Unit : mm

EDP No.	Radius of Ball Nose		Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Interference Angle(°)	Maximum reach lengths according to draft angle				
	R	D1							0.5°	1°	1.5°	2°	3°
HPI91923	R0.15	0.3	4	0.2	1.75	45	0.27	12.19	1.92	2.02	2.13	2.25	2.55
HPI91924	R0.15	0.3	4	0.2	2	45	0.27	11.86	2.19	2.30	2.42	2.56	2.90
HPI91925	R0.15	0.3	4	0.2	2.25	45	0.27	11.54	2.45	2.58	2.72	2.87	3.26
HPI91926	R0.15	0.3	4	0.2	2.5	45	0.27	11.24	2.71	2.85	3.01	3.19	3.61
HPI91927	R0.15	0.3	4	0.2	3	45	0.27	10.68	3.24	3.41	3.60	3.81	4.33
HPI91928	R0.15	0.3	4	0.2	3.5	45	0.27	10.17	3.76	3.96	4.18	4.43	5.04
HPI91929	R0.15	0.3	4	0.2	4	45	0.27	9.71	4.29	4.52	4.77	5.06	5.75
HPI91930	R0.15	0.3	6	0.2	1.5	50	0.27	13.31	1.66	1.74	1.84	1.94	2.19
HPI91004	R0.2	0.4	4	0.3	0.5	45	0.37	14.28	0.61	0.63	0.65	0.68	0.75
HPI91931	R0.2	0.4	4	0.3	0.8	45	0.37	13.72	0.92	0.96	1.00	1.05	1.17
HPI91932	R0.2	0.4	4	0.3	1	45	0.37	13.37	1.13	1.18	1.24	1.30	1.46
HPI91933	R0.2	0.4	4	0.3	1.5	45	0.37	12.57	1.66	1.74	1.83	1.93	2.17
HPI91934	R0.2	0.4	4	0.3	2	45	0.37	11.86	2.18	2.29	2.41	2.55	2.88
HPI91935	R0.2	0.4	4	0.3	2.5	45	0.37	11.22	2.71	2.85	3.00	3.17	3.59
HPI91936	R0.2	0.4	4	0.3	3	45	0.37	10.65	3.24	3.40	3.59	3.80	4.31
HPI91937	R0.2	0.4	4	0.3	3.5	45	0.37	10.13	3.76	3.96	4.18	4.42	5.02
HPI91938	R0.2	0.4	4	0.3	4	45	0.37	9.66	4.29	4.51	4.76	5.04	5.73
HPI91939	R0.2	0.4	4	0.3	4.5	45	0.37	9.23	4.81	5.07	5.35	5.67	6.44
HPI91940	R0.2	0.4	4	0.3	5	45	0.37	8.84	5.34	5.62	5.94	6.29	7.15
HPI91941	R0.2	0.4	4	0.3	6	45	0.37	8.15	6.39	6.73	7.11	7.54	8.57
HPI91942	R0.2	0.4	4	0.4	1	35	0.37	13.37	1.13	1.18	1.24	1.30	1.46
HPI91943	R0.2	0.4	4	0.4	1	50	0.37	13.37	1.13	1.18	1.24	1.30	1.46
HPI91944	R0.2	0.4	6	0.3	1	50	0.37	13.91	1.13	1.18	1.24	1.30	1.46
HPI91945	R0.2	0.4	6	0.3	2	50	0.37	12.82	2.18	2.29	2.41	2.55	2.88
HPI91946	R0.2	0.4	6	0.4	1	50	0.37	13.91	1.13	1.18	1.24	1.30	1.46
HPI91005	R0.25	0.5	4	0.35	1	45	0.45	13.35	1.19	1.24	1.30	1.36	1.52

▶ NEXT PAGE

Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
+0.001~-0.005	0~-0.010	h4

◎ : Excellent ○ : Good

ISO	P												M				K												
	Non-alloy steel						Low alloy steel						High alloyed steel, and tool steel				Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20								
HRC																													
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230								
Recommend	○						○						○				○				○				○				


ISO	N								S								H													
	Aluminum-wrought alloy				Aluminum-cast, alloyed				Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials				Heat Resistant Super Alloys				Titanium Alloys				Hardened steel				Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41						
HRC											15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	42	55						
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739		400	550						
Recommend	◎								◎								◎								◎				◎	◎

CARBIDE, 2 FLUTE BALL NOSE for RIB PROCESSING

- VOLLHARTMETALL, 2 SCHNEIDEN STIRNRADIUS für SCHMALE RIPPEN
Fraise carbure, 2 dents, hémisphérique pour usinage de rainure
2 TAGLIENTI, SEMISFERICA, SCARICATA PER NERVATURE

- Improvement of tool life by applying new coating.
Application of tight tolerances for precision machining.

- Verbesserung der Werkzeugstandzeit durch Aufbringen einer neuen Beschichtung
Enge Toleranzen für die Präzisionsbearbeitung

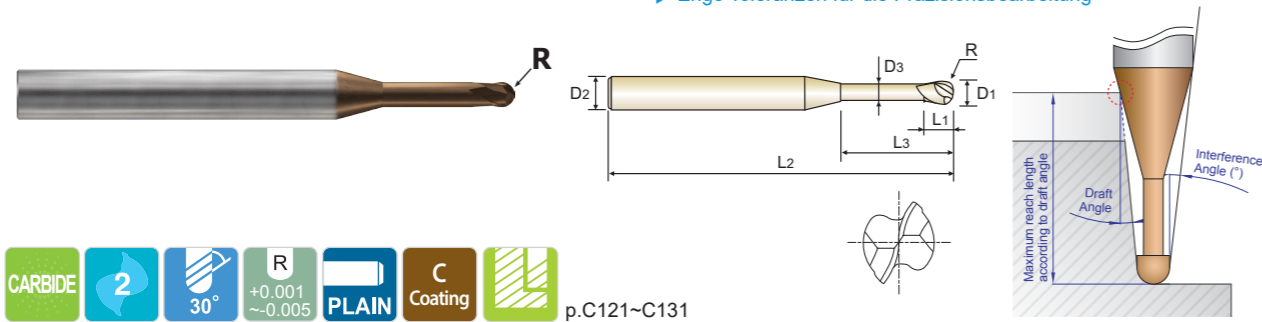

CARBIDE 2 30° R +0.001 ~-0.005 PLAIN Coating p.C121~C131

Unit : mm

Table with columns: EDP No., Radius of Ball Nose (R), Mill Diameter (D1), Shank Diameter (D2), Length of Cut (L1), Length Below Shank (L3), Overall Length (L2), Neck Diameter (D3), Interference Angle (°), and Maximum reach lengths according to draft angle (0.5°, 1°, 1.5°, 2°, 3°).

▶ NEXT PAGE

Table with 3 columns: Radius Tolerance (mm) +0.001~-0.005, Mill Dia. Tolerance (mm) 0~-0.010, Shank Dia. Tolerance h4

◎ : Excellent ○ : Good


ISO Material Recommendation table with columns for Material Description, ISO grades, and material types (Non-alloy steel, Low alloy steel, High alloyed steel, Stainless steel, Grey cast iron, Nodular cast iron, Malleable cast iron).

CARBIDE, 2 FLUTE BALL NOSE for RIB PROCESSING

- VOLLHARTMETALL, 2 SCHNEIDEN STIRNRADIUS für SCHMALE RIPPEN
Fraise carbure, 2 dents, hémisphérique pour usinage de rainure
2 TAGLIENTI, SEMISFERICA, SCARICATA PER NERVATURE

- Improvement of tool life by applying new coating.
Application of tight tolerances for precision machining.

- Verbesserung der Werkzeugstandzeit durch Aufbringen einer neuen Beschichtung
Enge Toleranzen für die Präzisionsbearbeitung

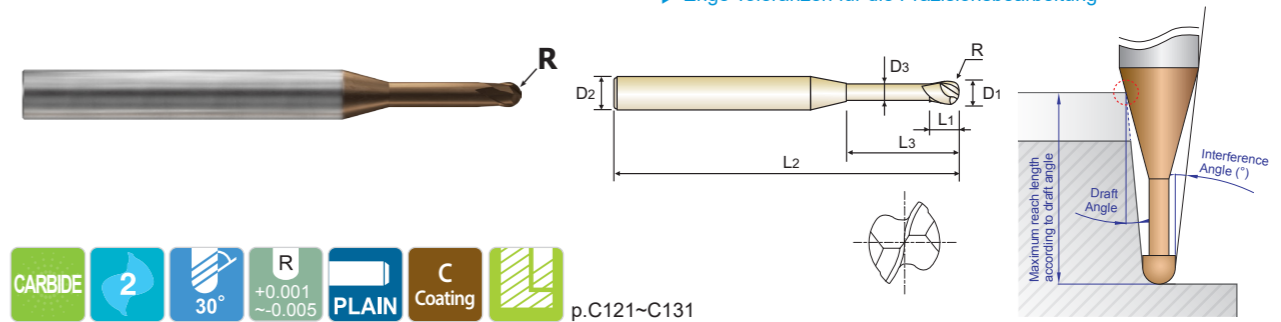

CARBIDE 2 30° R +0.001 ~-0.005 PLAIN Coating p.C121~C131

Unit : mm

Table with columns: EDP No., Radius of Ball Nose (R), Mill Diameter (D1), Shank Diameter (D2), Length of Cut (L1), Length Below Shank (L3), Overall Length (L2), Neck Diameter (D3), Interference Angle (°), and Maximum reach lengths according to draft angle (0.5°, 1°, 1.5°, 2°, 3°).

▶ NEXT PAGE

Table with 3 columns: Radius Tolerance (mm) +0.001~-0.005, Mill Dia. Tolerance (mm) 0~-0.010, Shank Dia. Tolerance h4

◎ : Excellent ○ : Good

ISO Material Recommendation table with columns for Material Description, ISO grades, and material types (Non-alloy steel, Low alloy steel, High alloyed steel, Stainless steel, Grey cast iron, Nodular cast iron, Malleable cast iron).




PLAIN SHANK HPI91 SERIES

CARBIDE, 2 FLUTE BALL NOSE for RIB PROCESSING

- VOLLHARTMETALL, 2 SCHNEIDEN STIRNRADIUS für SCHMALE RIPPEN
• Fraise carbure, 2 dents, hémisphérique pour usinage de rainure
• 2 TAGLIENTI, SEMISFERICA, SCARICATA PER NERVATURE

- ▶ Improvement of tool life by applying new coating.
▶ Application of tight tolerances for precision machining.

- ▶ Verbesserung der Werkzeugstandzeit durch Aufbringen einer neuen Beschichtung
▶ Enge Toleranzen für die Präzisionsbearbeitung

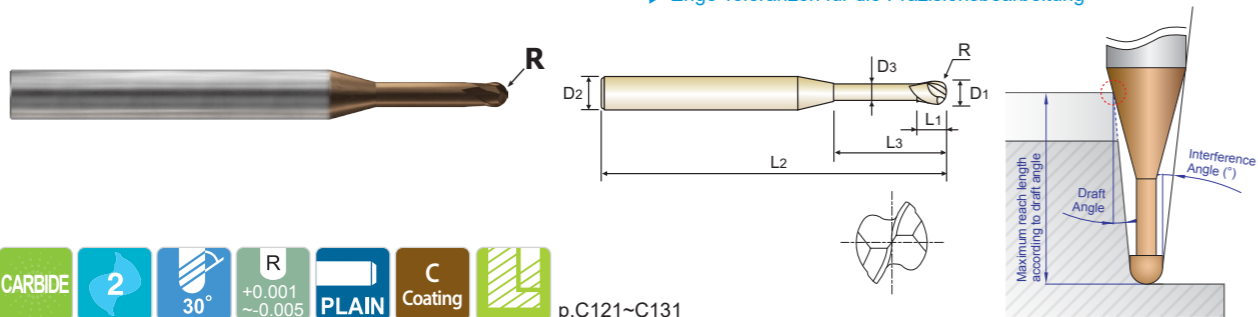

Unit : mm

Table with columns: EDP No., Radius of Ball Nose, Mill Diameter, Shank Diameter, Length of Cut, Length Below Shank, Overall Length, Neck Diameter, Interference Angle, and Maximum reach lengths according to draft angle (0.5°, 1°, 1.5°, 2°, 3°).

Table with columns: Radius Tolerance (mm), Mill Dia. Tolerance (mm), Shank Dia. Tolerance

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO material compatibility chart with columns for Material Description, P (Non-alloy steel, Low alloy steel, High alloyed steel, and tool steel), M (Stainless steel), K (Grey cast iron, Nodular cast iron, Malleable cast iron), N (Aluminum-wrought alloy, Aluminum-cast alloy, Copper and Copper Alloys, Non Metallic Materials), S (Heat Resistant Super Alloys, Titanium Alloys), and H (Hardened steel, Chilled Cast Iron, Hardened Cast Iron).




PLAIN SHANK HPI91 SERIES

CARBIDE, 2 FLUTE BALL NOSE for RIB PROCESSING

- VOLLHARTMETALL, 2 SCHNEIDEN STIRNRADIUS für SCHMALE RIPPEN
• Fraise carbure, 2 dents, hémisphérique pour usinage de rainure
• 2 TAGLIENTI, SEMISFERICA, SCARICATA PER NERVATURE

- ▶ Improvement of tool life by applying new coating.
▶ Application of tight tolerances for precision machining.

- ▶ Verbesserung der Werkzeugstandzeit durch Aufbringen einer neuen Beschichtung
▶ Enge Toleranzen für die Präzisionsbearbeitung

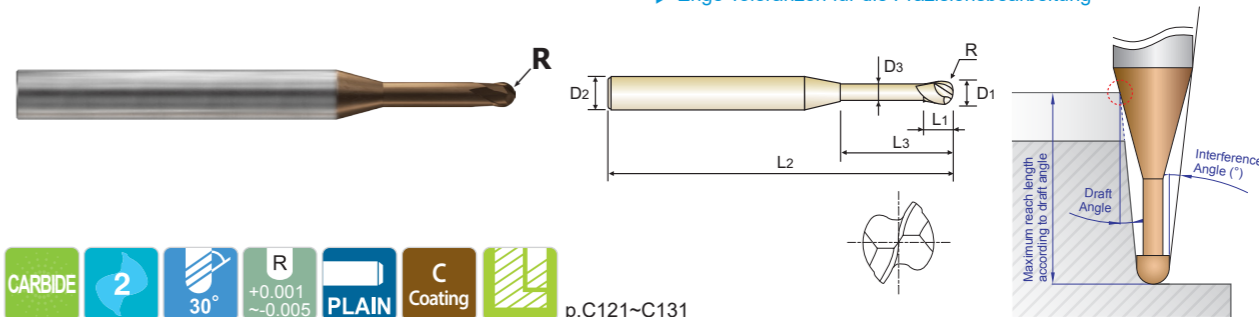

Unit : mm

Table with columns: EDP No., Radius of Ball Nose, Mill Diameter, Shank Diameter, Length of Cut, Length Below Shank, Overall Length, Neck Diameter, Interference Angle, and Maximum reach lengths according to draft angle (0.5°, 1°, 1.5°, 2°, 3°).

Table with columns: Radius Tolerance (mm), Mill Dia. Tolerance (mm), Shank Dia. Tolerance

▶ NEXT PAGE

◎ : Excellent ○ : Good


ISO material compatibility chart with columns for Material Description, P (Non-alloy steel, Low alloy steel, High alloyed steel, and tool steel), M (Stainless steel), K (Grey cast iron, Nodular cast iron, Malleable cast iron), N (Aluminum-wrought alloy, Aluminum-cast alloy, Copper and Copper Alloys, Non Metallic Materials), S (Heat Resistant Super Alloys, Titanium Alloys), and H (Hardened steel, Chilled Cast Iron, Hardened Cast Iron).

CARBIDE, 2 FLUTE BALL NOSE for RIB PROCESSING

● VOLLHARTMETALL, 2 SCHNEIDEN STIRNRADIUS für SCHMALE RIPPEN
 (●) Fraise carbure, 2 dents, hémisphérique pour usinage de rainure
 (●) 2 TAGLIENTI, SEMISFERICA, SCARICATA PER NERVATURE

- ▶ Improvement of tool life by applying new coating.
- ▶ Application of tight tolerances for precision machining.

- ▶ Verbesserung der Werkzeugstandzeit durch Aufbringen einer neuen Beschichtung
- ▶ Enge Toleranzen für die Präzisionsbearbeitung

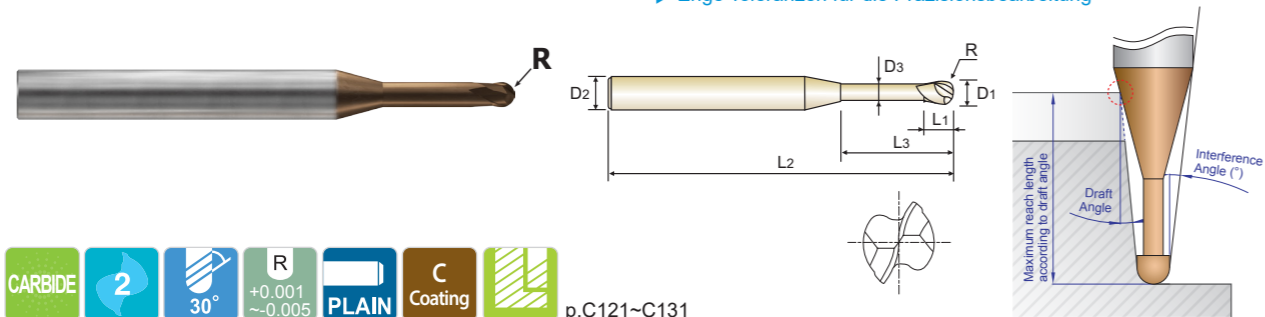

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Interference Angle(°)	Maximum reach lengths according to draft angle				
									0.5°	1°	1.5°	2°	3°
HPI91844	R0.75	1.5	4	1.1	18	55	1.45	3.25	18.68	19.30	19.97	20.69	22.31
HPI91845	R0.75	1.5	4	1.1	20	55	1.45	2.98	20.74	21.44	22.19	22.99	-
HPI91846	R0.75	1.5	4	1.1	22	60	1.45	2.75	22.81	23.58	24.41	25.29	-
HPI91847	R0.75	1.5	4	1.1	30	70	1.45	2.10	31.08	32.14	33.27	34.49	-
HPI91848	R0.75	1.5	4	1.5	3.8	40	1.45	9.10	4.00	4.11	4.23	4.36	4.66
HPI91849	R0.75	1.5	4	1.5	3.8	50	1.45	9.10	4.00	4.11	4.23	4.36	4.66
HPI91850	R0.75	1.5	6	1.1	6	50	1.45	9.30	6.27	6.47	6.67	6.89	7.39
HPI91851	R0.75	1.5	6	1.1	8	50	1.45	8.13	8.34	8.61	8.89	9.19	9.88
HPI91852	R0.75	1.5	6	1.5	3.8	50	1.45	11.03	4.00	4.11	4.23	4.36	4.66
HPI91016	R0.8	1.6	4	1.2	8	45	1.55	5.82	8.34	8.60	8.88	9.19	9.87
HPI91853	R0.8	1.6	4	1.2	12	45	1.55	4.35	12.47	12.88	13.32	13.79	14.84
HPI91854	R0.8	1.6	4	1.2	16	50	1.55	3.47	16.61	17.16	17.75	18.39	19.81
HPI91855	R0.8	1.6	4	1.2	20	55	1.55	2.89	20.74	21.44	22.18	22.98	-
HPI91020	R1.0	2.0	4	1.5	3	45	1.95	9.74	3.16	3.24	3.32	3.41	3.60
HPI91856	R1.0	2.0	4	1.5	4	45	1.95	8.34	4.20	4.31	4.43	4.56	4.85
HPI91857	R1.0	2.0	4	1.5	6	45	1.95	6.46	6.26	6.45	6.64	6.86	7.33
HPI91858	R1.0	2.0	4	1.5	8	45	1.95	5.28	8.33	8.59	8.86	9.16	9.82
HPI91859	R1.0	2.0	4	1.5	10	45	1.95	4.46	10.40	10.73	11.08	11.46	12.30
HPI91860	R1.0	2.0	4	1.5	12	45	1.95	3.86	12.47	12.87	13.29	13.76	14.79
HPI91861	R1.0	2.0	4	1.5	13	45	1.95	3.62	13.50	13.94	14.40	14.91	16.03
HPI91862	R1.0	2.0	4	1.5	14	50	1.95	3.40	14.53	15.01	15.51	16.06	17.28
HPI91863	R1.0	2.0	4	1.5	16	50	1.95	3.04	16.60	17.15	17.73	18.36	19.76
HPI91864	R1.0	2.0	4	1.5	18	55	1.95	2.75	18.67	19.28	19.94	20.65	-
HPI91865	R1.0	2.0	4	1.5	20	55	1.95	2.51	20.74	21.42	22.16	22.95	-
HPI91866	R1.0	2.0	4	1.5	22	60	1.95	2.31	22.80	23.56	24.38	25.25	-
HPI91867	R1.0	2.0	4	1.5	25	65	1.95	2.06	25.90	26.77	27.70	28.70	-

▶ NEXT PAGE

Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
+0.001~-0.005	0~-0.010	h4

◎ : Excellent ○ : Good


ISO Material Description	P										M					K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																											
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel					Grey cast iron					Nodular cast iron					Malleable cast iron																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264	265	266	267	268	269	270	271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289	290	291	292	293	294	295	296	297	298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	324	325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345	346	347	348	349	350	351	352	353	354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374	375	376	377	378	379	380	381	382	383	384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399	400	401	402	403	404	405	406	407	408	409	410	411	412	413	414	415	416	417	418	419	420	421	422	423	424	425	426	427	428	429	430	431	432	433	434	435	436	437	438	439	440	441	442	443	444	445	446	447	448	449	450	451	452	453	454	455	456	457	458	459	460	461	462	463	464	465	466	467	468	469	470	471	472	473	474	475	476	477	478	479	480	481	482	483	484	485	486	487	488	489	490	491	492	493	494	495	496	497	498	499	500	501	502	503	504	505	506	507	508	509	510	511	512	513	514	515	516	517	518	519	520	521	522	523	524	525	526	527	528	529	530	531	532	533	534	535	536	537	538	539	540	541	542	543	544	545	546	547	548	549	550	551	552	553	554	555	556	557	558	559	560	561	562	563	564	565	566	567	568	569	570	571	572	573	574	575	576	577	578	579	580	581	582	583	584	585	586	587	588	589	590	591	592	593	594	595	596	597	598	599	600	601	602	603	604	605	606	607	608	609	610	611	612	613	614	615	616	617	618	619	620	621	622	623	624	625	626	627	628	629	630	631	632	633	634	635	636	637	638	639	640	641	642	643	644	645	646	647	648	649	650	651	652	653	654	655	656	657	658	659	660	661	662	663	664	665	666	667	668	669	670	671	672	673	674	675	676	677	678	679	680	681	682	683	684	685	686	687	688	689	690	691	692	693	694	695	696	697	698	699	700	701	702	703	704	705	706	707	708	709	710	711	712	713	714	715	716	717	718	719	720	721	722	723	724	725	726	727	728	729	730	731	732	733	734	735	736	737	738	739	740	741	742	743	744	745	746	747	748	749	750	751	752	753	754	755	756	757	758	759	760	761	762	763	764	765	766	767	768	769	770	771	772	773	774	775	776	777	778	779	780	781	782	783	784	785	786	787	788	789	790	791	792	793	794	795	796	797	798	799	800	801	802	803	804	805	806	807	808	809	810	811	812	813	814	815	816	817	818	819	820	821	822	823	824	825	826	827	828	829	830	831	832	833	834	835	836	837	838	839	840	841	842	843	844	845	846	847	848	849	850	851	852	853	854	855	856	857	858	859	860	861	862	863	864	865	866	867	868	869	870	871	872	873	874	875	876	877	878	879	880	881	882	883	884	885	886	887	888	889	890	891	892	893	894	895	896	897	898	899	900	901	902	903	904	905	906	907	908	909	910	911	912	913	914	915	916	917	918	919	920	921	922	923	924	925	926	927	928	929	930	931	932	933	934	935	936	937	938	939	940	941	942	943	944	945	946	947	948	949	950	951	952	953	954	955	956	957	958	959	960	961	962	963	964	965	966	967	968	969	970	971	972	973	974	975	976	977	978	979	980	981	982	9

CARBIDE, 2 FLUTE BALL NOSE for RIB PROCESSING

● VOLLHARTMETALL, 2 SCHNEIDEN STIRNRADIUS für SCHMALE RIPPEN
 (●) Fraise carbure, 2 dents, hémisphérique pour usinage de rainure
 (●) 2 TAGLIENTI, SEMISFERICA, SCARICATA PER NERVATURE

- ▶ Improvement of tool life by applying new coating.
- ▶ Application of tight tolerances for precision machining.

- ▶ Verbesserung der Werkzeugstandzeit durch Aufbringen einer neuen Beschichtung
- ▶ Enge Toleranzen für die Präzisionsbearbeitung

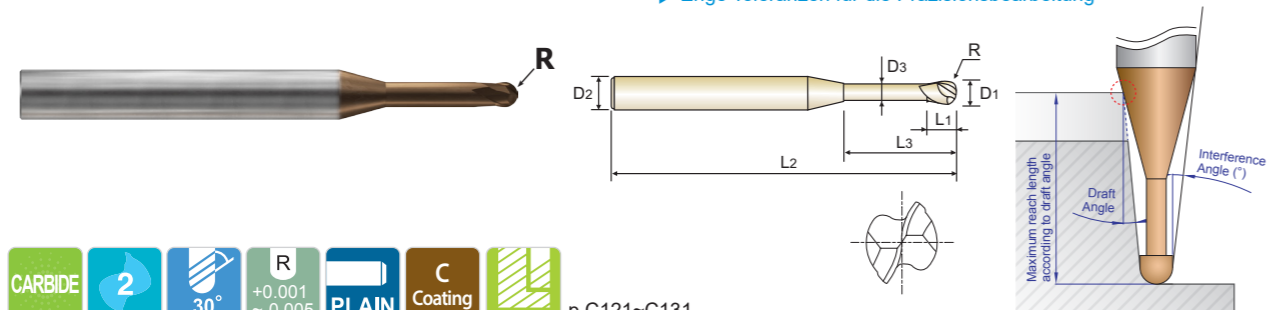

CARBIDE 2 30° R +0.001 ~ -0.005 PLAIN Coating p.C121~C131

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Interference Angle(°)	Maximum reach lengths according to draft angle				
									0.5°	1°	1.5°	2°	3°
HPI91892	R1.5	3.0	6	2.5	16	60	2.85	4.21	16.78	17.31	17.88	18.49	19.87
HPI91893	R1.5	3.0	6	2.5	20	65	2.85	3.52	20.91	21.59	22.31	23.09	24.85
HPI91894	R1.5	3.0	6	2.5	25	65	2.85	2.92	26.08	26.94	27.86	28.84	-
HPI91895	R1.5	3.0	6	2.5	30	70	2.85	2.50	31.25	32.29	33.40	34.59	-
HPI91896	R1.5	3.0	6	2.5	35	80	2.85	2.18	36.42	37.63	38.94	40.34	-
HPI91897	R1.5	3.0	6	2.5	40	90	2.85	1.94	41.59	42.98	44.48	-	-
HPI91898	R1.5	3.0	6	3	8	60	2.85	6.91	8.51	8.75	9.01	9.30	9.93
HPI91035	R1.75	3.5	6	2.8	15	60	3.35	3.93	15.74	16.22	16.75	17.31	18.57
HPI91899	R1.75	3.5	6	2.8	20	65	3.35	3.08	20.90	21.57	22.29	23.06	24.79
HPI91701	R1.75	3.5	6	2.8	25	65	3.35	2.54	26.07	26.92	27.83	28.81	-
HPI91702	R1.75	3.5	6	2.8	30	70	3.35	2.16	31.24	32.27	33.37	34.56	-
HPI91703	R1.75	3.5	6	2.8	35	80	3.35	1.87	36.41	37.62	38.91	-	-
HPI91704	R1.75	3.5	6	2.8	40	90	3.35	1.66	41.58	42.96	44.45	-	-
HPI91705	R1.75	3.5	6	2.8	45	90	3.35	1.49	46.75	48.31	-	-	-
HPI91040	R2.0	4.0	4	3	8	65	3.85	0.00	-	-	-	-	-
HPI91706	R2.0	4.0	6	3	8	65	3.85	5.70	8.49	8.72	8.96	9.22	9.81
HPI91707	R2.0	4.0	6	3	10	65	3.85	4.76	10.56	10.86	11.18	11.52	12.29
HPI91708	R2.0	4.0	6	3	12	65	3.85	4.08	12.63	13.00	13.39	13.82	14.78
HPI91709	R2.0	4.0	6	3	14	65	3.85	3.57	14.69	15.14	15.61	16.12	17.27
HPI91710	R2.0	4.0	6	3	15	65	3.85	3.36	15.73	16.21	16.72	17.27	18.51
HPI91711	R2.0	4.0	6	3	20	65	3.85	2.60	20.90	21.55	22.26	23.02	-
HPI91712	R2.0	4.0	6	3	25	70	3.85	2.12	26.06	26.90	27.80	28.77	-
HPI91713	R2.0	4.0	6	3	30	70	3.85	1.79	31.23	32.25	33.34	-	-
HPI91714	R2.0	4.0	6	3	35	80	3.85	1.55	36.40	37.60	38.88	-	-
HPI91715	R2.0	4.0	6	3	40	85	3.85	1.36	41.57	42.95	-	-	-
HPI91716	R2.0	4.0	6	3	45	90	3.85	1.22	46.74	48.30	-	-	-

▶ NEXT PAGE

Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
+0.001~-0.005	0~-0.010	h4

◎ : Excellent ○ : Good

ISO Material Description	P										M					K								
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel					Grey cast iron		Nodular cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22		
HRc	13	25	28	32	38	42	48	52	58	62	68	72	78	82	88	92	98	102	108	112	118	122		
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230			
Recommend																								


ISO Material Description	N										S					H																								
	Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials					Heat Resistant Super Alloys					Titanium Alloys		Hardened steel			Chilled Cast Iron	Hardened Cast Iron													
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55		
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739			400	550															
Recommend																																								

CARBIDE, 2 FLUTE BALL NOSE for RIB PROCESSING

● VOLLHARTMETALL, 2 SCHNEIDEN STIRNRADIUS für SCHMALE RIPPEN
 (●) Fraise carbure, 2 dents, hémisphérique pour usinage de rainure
 (●) 2 TAGLIENTI, SEMISFERICA, SCARICATA PER NERVATURE

- ▶ Improvement of tool life by applying new coating.
- ▶ Application of tight tolerances for precision machining.

- ▶ Verbesserung der Werkzeugstandzeit durch Aufbringen einer neuen Beschichtung
- ▶ Enge Toleranzen für die Präzisionsbearbeitung

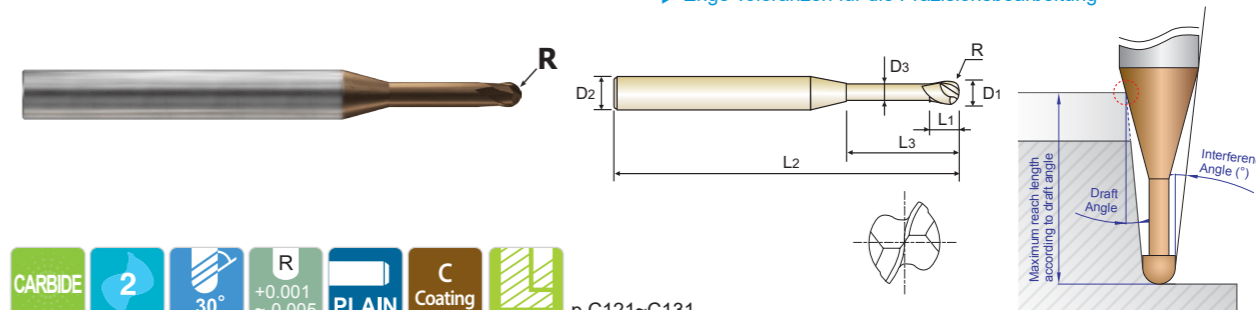

CARBIDE 2 30° R +0.001 ~ -0.005 PLAIN Coating p.C121~C131

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Interference Angle(°)	Maximum reach lengths according to draft angle				
									0.5°	1°	1.5°	2°	3°
HPI91717	R2.0	4.0	6	3	50	100	3.85	1.10	51.91	53.64	-	-	-
HPI91718	R2.0	4.0	6	4	10	40	3.85	4.76	10.56	10.86	11.18	11.52	12.29
HPI91719	R2.0	4.0	6	4	10	60	3.85	4.76	10.56	10.86	11.18	11.52	12.29
HPI91050	R2.5	5.0	6	3.5	10	70	4.85	2.97	10.54	10.82	11.12	11.45	-
HPI91060	R3.0	6.0	6	6	10	70	5.85	0.00	-	-	-	-	-
HPI91720	R2.5	5.0	6	3.5	15	70	4.85	1.96	15.71	16.17	16.66	-	-
HPI91721	R2.5	5.0	6	3.5	20	70	4.85	1.46	20.88	21.52	-	-	-
HPI91722	R2.5	5.0	6	3.5	25	70	4.85	1.16	26.05	26.87	-	-	-
HPI91723	R2.5	5.0	6	3.5	30	80	4.85	0.97	31.22	-	-	-	-
HPI91724	R2.5	5.0	6	3.5	40	90	4.85	0.72	41.55	-	-	-	-
HPI91725	R2.5	5.0	6	5	12	45	4.85	2.46	12.61	12.96	13.34	13.75	-
HPI91726	R2.5	5.0	6	5	12	60	4.85	2.46	12.61	12.96	13.34	13.75	-
HPI91727	R3.0	6.0	6	6	15	45	5.85	0.00	-	-	-	-	-
HPI91728	R3.0	6.0	6	6	15	60	5.85	0.00	-	-	-	-	-
HPI91729	R3.0	6.0	6	6	15	70	5.85	0.00	-	-	-	-	-
HPI91730	R3.0	6.0	6	6	20	70	5.85	0.00	-	-	-	-	-
HPI91731	R3.0	6.0	6	6	25	70	5.85	0.00	-	-	-	-	-
HPI91732	R3.0	6.0	6	6	30	80	5.85	0.00	-	-	-	-	-
HPI91733	R3.0	6.0	6	6	35	85	5.85	0.00	-	-	-	-	-
HPI91734	R3.0	6.0	6	6	40	90	5.85	0.00	-	-	-	-	-
HPI91735	R3.0	6.0	6	6	50	120	5.85	0.00	-	-	-	-	-
HPI91736	R3.0	6.0	6	6	60	120	5.85	0.00	-	-	-	-	-

Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
+0.001~-0.005	0~-0.010	h4

◎ : Excellent ○ : Good

ISO Material Description	P										M					K								
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel					Grey cast iron		Nodular cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22		
HRc	13	25	28	32	38	42	48	52	58	62	68	72	78	82	88	92	98	102	108	112	118	122		
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230			
Recommend																								

ISO Material Description	N										S					H																							
	Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials					Heat Resistant Super Alloys					Titanium Alloys		Hardened steel			Chilled Cast Iron	Hardened Cast Iron												
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739			400	550														
Recommend																																							




PLAIN SHANK **HPI92** SERIES

CARBIDE, 2 FLUTE BALL NOSE for RIB PROCESSING with TAPER NECK

- VOLLHARTMETALL, 2 SCHNEIDEN STIRNRADIUS für SCHMALE RIPPEN mit KONISCH ABGESETZTEM SCHAFTTEIL
- Fraise carbure, 2 dents, hémisphérique pour usinage de rainure avec entrée conique
- 2 TAGLIENTI, SEMISFERICA, SCARICATA PER NERVATURE, SCARICO CONICO

- ▶ Improvement of tool life by applying new coating.
- ▶ Application of tight tolerances for precision machining.

- ▶ Verbesserung der Werkzeugstandzeit durch Aufbringen einer neuen Beschichtung
- ▶ Enge Toleranzen für die Präzisionsbearbeitung

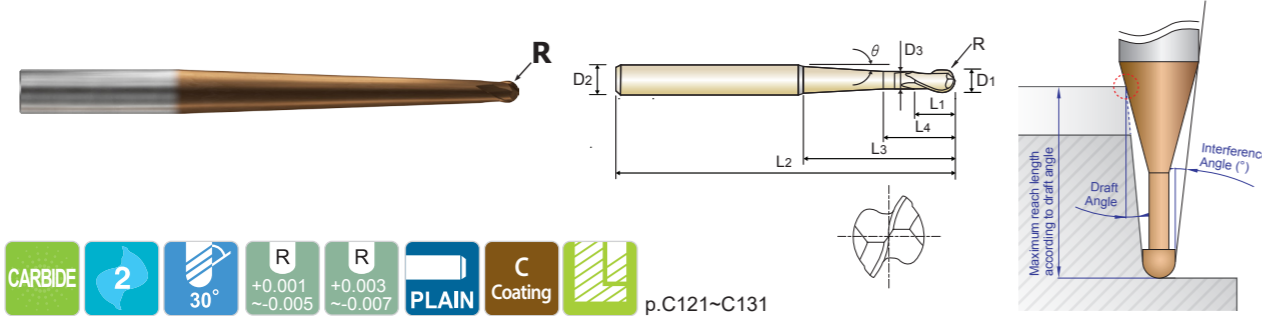

CARBIDE 2 30° R +0.001/-0.005 R +0.003/-0.007 PLAIN Coating p.C121~C131

R0.05-R3 R3.5-R6

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Neck Taper Angle(°)	Under Neck Parallel Length	Interference Angle(°)	Maximum reach lengths according to draft angle				
											0.5°	1°	1.5°	2°	3°
HPI92001	R0.05	0.1	4	0.07	0.5	50	0.085	3°	0.17	14.23	0.37	0.44	0.51	0.53	0.56
HPI92901	R0.05	0.1	4	0.07	0.75	50	0.085	3°	0.17	13.88	0.37	0.44	0.58	0.76	0.81
HPI920015	R0.075	0.15	4	0.1	1	50	0.135	3°	0.25	13.55	0.46	0.55	0.71	1.00	1.08
HPI92902	R0.075	0.15	4	0.1	1.5	50	0.135	3°	0.25	12.92	0.46	0.55	0.71	1.03	1.58
HPI92002	R0.1	0.2	4	0.15	1.5	50	0.17	0.5°	0.35	12.59	1.57	1.62	1.67	1.73	1.86
HPI92903	R0.1	0.2	4	0.15	1.5	50	0.17	1°	0.35	12.64	1.53	1.58	1.63	1.69	1.82
HPI92904	R0.1	0.2	4	0.15	1.5	50	0.17	1.5°	0.35	12.69	1.33	1.54	1.59	1.64	1.77
HPI92905	R0.1	0.2	4	0.15	1.5	50	0.17	2°	0.35	12.75	1.01	1.46	1.55	1.60	1.72
HPI92906	R0.1	0.2	4	0.15	2	50	0.17	0.5°	0.35	11.93	2.07	2.13	2.21	2.29	2.46
HPI92907	R0.1	0.2	4	0.15	2	50	0.17	1°	0.35	12.00	2.01	2.08	2.15	2.23	2.40
HPI92908	R0.1	0.2	4	0.15	2	50	0.17	1.5°	0.35	12.07	1.33	2.02	2.09	2.16	2.33
HPI92909	R0.1	0.2	4	0.15	2	50	0.17	2°	0.35	12.14	1.01	1.46	2.03	2.10	2.26
HPI92910	R0.1	0.2	4	0.15	3	50	0.17	3°	0.35	11.28	0.74	0.90	1.17	1.71	3.13
HPI92911	R0.1	0.2	4	0.15	3	50	0.17	5°	0.35	11.69	0.57	0.63	0.70	0.80	1.15
HPI92912	R0.1	0.2	4	0.15	5	50	0.17	3°	0.35	9.68	0.74	0.90	1.17	1.71	5.13
HPI92913	R0.1	0.2	4	0.15	5	50	0.17	5°	0.35	10.23	0.57	0.63	0.70	0.80	1.15
HPI92003	R0.15	0.3	4	0.2	2	50	0.27	0.5°	0.5	11.92	2.07	2.14	2.21	2.29	2.46
HPI92914	R0.15	0.3	4	0.2	2	50	0.27	1°	0.5	11.99	2.02	2.08	2.15	2.23	2.40
HPI92915	R0.15	0.3	4	0.2	2	50	0.27	1.5°	0.5	12.05	1.53	2.03	2.10	2.17	2.34
HPI92916	R0.15	0.3	4	0.2	2	50	0.27	2°	0.5	12.12	1.19	1.71	2.05	2.12	2.28
HPI92917	R0.15	0.3	4	0.2	2	50	0.27	3°	0.5	12.26	0.91	1.10	1.42	2.00	2.15
HPI92918	R0.15	0.3	4	0.2	3	50	0.27	0.5°	0.5	10.77	3.07	3.17	3.28	3.40	3.66
HPI92919	R0.15	0.3	4	0.2	3	50	0.27	1°	0.5	10.86	2.57	3.08	3.19	3.30	3.56
HPI92920	R0.15	0.3	4	0.2	3	50	0.27	1.5°	0.5	10.95	1.53	2.92	3.10	3.21	3.46
HPI92921	R0.15	0.3	4	0.2	3	50	0.27	2°	0.5	11.04	1.19	1.71	3.01	3.12	3.36
HPI92922	R0.15	0.3	4	0.2	3	50	0.27	3°	0.5	11.23	0.91	1.10	1.42	2.06	3.15

▶ NEXT PAGE

Size	Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to R3	+0.001~-0.005	0~-0.010	h4
over R3	+0.003~-0.007	0~-0.012	* Shank Dia. > φ6 : h5

◎ : Excellent ○ : Good

ISO	P											M			K						
	Non-alloy steel					Low alloy steel						High alloyed steel, and tool steel			Stainless steel			Grey cast iron	Nodular cast iron	Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20
HRC	13	25	28	32	38	10	29	32	38	15	35	44	12	23	10	10	26	3	25	19	21
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N											S			H									
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys			Hardened steel			Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRC	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	45-49	50-55	56-60	61-65	66-70	42	55	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739	400	550	550
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎




PLAIN SHANK **HPI92** SERIES

CARBIDE, 2 FLUTE BALL NOSE for RIB PROCESSING with TAPER NECK

- VOLLHARTMETALL, 2 SCHNEIDEN STIRNRADIUS für SCHMALE RIPPEN mit KONISCH ABGESETZTEM SCHAFTTEIL
- Fraise carbure, 2 dents, hémisphérique pour usinage de rainure avec entrée conique
- 2 TAGLIENTI, SEMISFERICA, SCARICATA PER NERVATURE, SCARICO CONICO

- ▶ Improvement of tool life by applying new coating.
- ▶ Application of tight tolerances for precision machining.

- ▶ Verbesserung der Werkzeugstandzeit durch Aufbringen einer neuen Beschichtung
- ▶ Enge Toleranzen für die Präzisionsbearbeitung

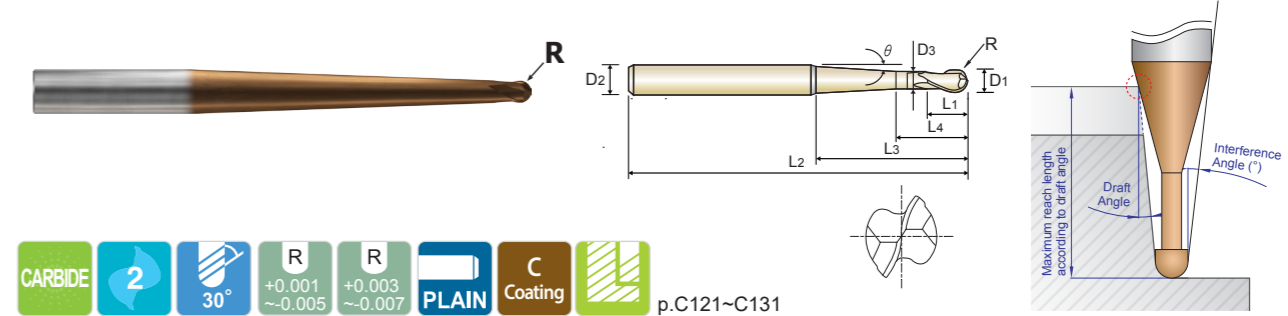

CARBIDE 2 30° R +0.001/-0.005 R +0.003/-0.007 PLAIN Coating p.C121~C131

R0.05-R3 R3.5-R6

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Neck Taper Angle(°)	Under Neck Parallel Length	Interference Angle(°)	Maximum reach lengths according to draft angle				
											0.5°	1°	1.5°	2°	3°
HPI92923	R0.15	0.3	4	0.2	3	50	0.27	5°	0.5	11.62	0.73	0.80	0.89	1.02	1.45
HPI92924	R0.15	0.3	4	0.2	5	50	0.27	3°	0.5	9.61	0.91	1.10	1.42	2.06	5.15
HPI92925	R0.15	0.3	4	0.2	5	50	0.27	5°	0.5	10.14	0.73	0.80	0.89	1.02	1.45
HPI92926	R0.15	0.3	4	0.2	7	50	0.27	3°	0.5	8.39	0.91	1.10	1.42	2.06	7.15
HPI92927	R0.15	0.3	4	0.2	7	50	0.27	5°	0.5	8.99	0.73	0.80	0.89	1.02	1.45
HPI92004	R0.2	0.4	4	0.3	3	50	0.37	0.5°	0.7	10.73	3.07	3.17	3.28	3.40	3.66
HPI92928	R0.2	0.4	4	0.3	3	50	0.37	1°	0.7	10.81	2.92	3.09	3.20	3.31	3.56
HPI92929	R0.2	0.4	4	0.3	3	50	0.37	1.5°	0.7	10.90	1.81	3.01	3.12	3.23	3.47
HPI92930	R0.2	0.4	4	0.3	3	50	0.37	2°	0.7	10.98	1.44	2.06	3.03	3.14	3.38
HPI92931	R0.2	0.4	4	0.3	4	50	0.37	0.5°	0.7	9.76	4.07	4.21	4.35	4.51	4.86
HPI92932	R0.2	0.4	4	0.3	4	50	0.37	1°	0.7	9.86	2.92	4.09	4.24	4.39	4.73
HPI92933	R0.2	0.4	4	0.3	4	50	0.37	1.5°	0.7	9.96	1.81	3.42	4.12	4.26	4.59
HPI92934	R0.2	0.4	4	0.3	4	50	0.37	2°	0.7	10.06	1.44	2.06	3.92	4.14	4.46
HPI92935	R0.2	0.4	4	0.3	5	50	0.37	3°	0.7	9.52	1.14	1.38	1.77	2.56	5.19
HPI92936	R0.2	0.4	4	0.3	5	50	0.37	5°	0.7	10.04	0.95	1.04	1.16	1.32	1.87
HPI92937	R0.2	0.4	4	0.3	6	50	0.37	0.5°	0.7	8.26	6.07	6.28	6.50	6.74	7.27
HPI92938	R0.2	0.4	4	0.3	6	50	0.37	1°	0.7	8.37	2.92	6.09	6.31	6.54	7.05
HPI92939	R0.2	0.4	4	0.3	6	50	0.37	1.5°	0.7	8.49	1.81	3.42	6.12	6.34	6.84
HPI92940	R0.2	0.4	4	0.3	6	50	0.37	2°	0.7	8.61	1.44	2.06	3.92	6.14	6.62
HPI92941	R0.2	0.4	4	0.3	7	50	0.37	3°	0.7	8.30	1.14	1.38	1.77	2.56	7.19
HPI92942	R0.2	0.4	4	0.3	7	50	0.37	5°	0.7	8.88	0.95	1.04	1.16	1.32	1.87
HPI92005	R0.25	0.5	4	0.35	4	50	0.45	0.5°	0.85	9.67	4.12	4.25	4.40	4.55	4.90
HPI92943	R0.25	0.5	4	0.35	4	50	0.45	1°	0.85	9.76	4.01	4.14	4.28	4.43	4.77
HPI92944	R0.25	0.5	4	0.35	4	50	0.45	1.5°	0.85	9.86	2.58	4.03	4.17	4.32	4.65
HPI92945	R0.25	0.5	4	0.35	4	50	0.45	2°	0.85	9.96	2.00	2.88	4.05	4.20	4.52
HPI92946	R0.25	0.5	4	0.35	5	50	0.45	0.5°	0.85	8.85	5.12	5.29	5.47	5.66	6.10

▶ NEXT PAGE

Size	Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to R3	+0.001~-0.005	0~-0.010	h4
over R3	+0.003~-0.007	0~-0.012	* Shank Dia. > φ6 : h5

◎ : Excellent ○ : Good

ISO	P											M			K						
	Non-alloy steel					Low alloy steel						High alloyed steel, and tool steel			Stainless steel			Grey cast iron	Nodular cast iron	Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20
HRC	13	25	28	32	38	10	29	32	38	15	35	44	12	23	10	10	26	3	25	19	21




PLAIN SHANK HPI92 SERIES

CARBIDE, 2 FLUTE BALL NOSE for RIB PROCESSING with TAPER NECK

VOLLHARTMETALL, 2 SCHNEIDEN STIRNRADIUS für SCHMALE RIPPEN mit KONISCH ABGESETZTEM SCHAFTTEIL
Fraise carbure, 2 dents, hémisphérique pour usinage de rainure avec entrée conique
2 TAGLIENTI, SEMISFERICA, SCARICATA PER NERVATURE, SCARICO CONICO

- Improvement of tool life by applying new coating.
Application of tight tolerances for precision machining.

- Verbesserung der Werkzeugstandzeit durch Aufbringen einer neuen Beschichtung
Enge Toleranzen für die Präzisionsbearbeitung

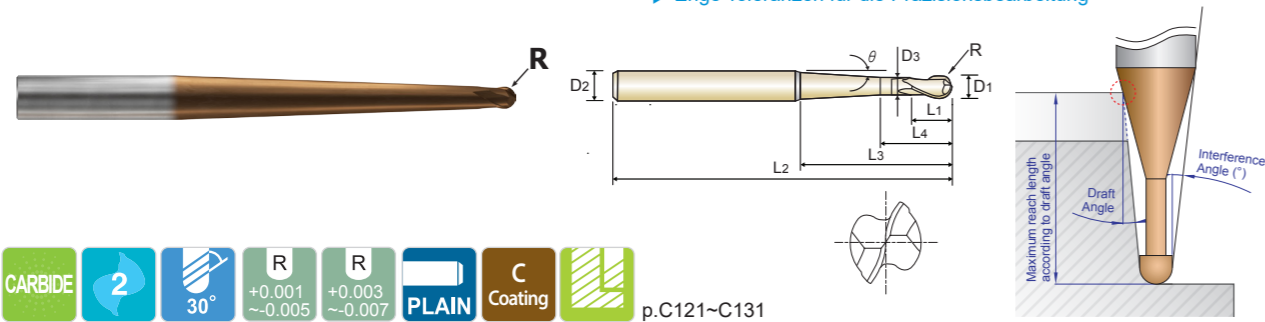

R0.05-R3 R3.5-R6 Unit : mm

Table with columns: EDP No., Radius of Ball Nose, Mill Diameter, Shank Diameter, Length of Cut, Length Below Shank, Overall Length, Neck Diameter, Neck Taper Angle, Under Neck Parallel Length, Interference Angle, Maximum reach lengths according to draft angle (0.5°, 1°, 1.5°, 2°, 3°). Rows include HPI92947 to HPI92970.

▶ NEXT PAGE

Table with columns: Size, Radius Tolerance (mm), Mill Dia. Tolerance (mm), Shank Dia. Tolerance. Rows: up to R3, over R3.

◎ : Excellent ○ : Good

ISO Material Recommendation table with columns: ISO, Material Description, P (Non-alloy steel, Low alloy steel, High alloyed steel, and tool steel), M (Stainless steel), K (Grey cast iron, Nodular cast iron, Malleable cast iron), N (Aluminum-wrought alloy, Aluminum-cast alloy, Copper and Copper Alloys, Non Metallic Materials), S (Heat Resistant Super Alloys, Titanium Alloys), H (Hardened steel, Chilled Cast Iron, Hardened Cast Iron).




PLAIN SHANK HPI92 SERIES

CARBIDE, 2 FLUTE BALL NOSE for RIB PROCESSING with TAPER NECK

VOLLHARTMETALL, 2 SCHNEIDEN STIRNRADIUS für SCHMALE RIPPEN mit KONISCH ABGESETZTEM SCHAFTTEIL
Fraise carbure, 2 dents, hémisphérique pour usinage de rainure avec entrée conique
2 TAGLIENTI, SEMISFERICA, SCARICATA PER NERVATURE, SCARICO CONICO

- Improvement of tool life by applying new coating.
Application of tight tolerances for precision machining.

- Verbesserung der Werkzeugstandzeit durch Aufbringen einer neuen Beschichtung
Enge Toleranzen für die Präzisionsbearbeitung

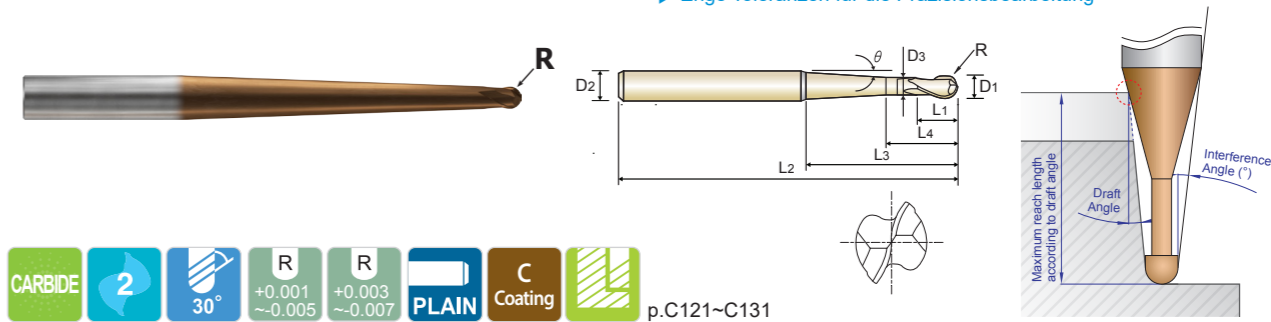

R0.05-R3 R3.5-R6 Unit : mm

Table with columns: EDP No., Radius of Ball Nose, Mill Diameter, Shank Diameter, Length of Cut, Length Below Shank, Overall Length, Neck Diameter, Neck Taper Angle, Under Neck Parallel Length, Interference Angle, Maximum reach lengths according to draft angle (0.5°, 1°, 1.5°, 2°, 3°). Rows include HPI92971 to HPI92995.

▶ NEXT PAGE

Table with columns: Size, Radius Tolerance (mm), Mill Dia. Tolerance (mm), Shank Dia. Tolerance. Rows: up to R3, over R3.

◎ : Excellent ○ : Good

ISO Material Recommendation table with columns: ISO, Material Description, P (Non-alloy steel, Low alloy steel, High alloyed steel, and tool steel), M (Stainless steel), K (Grey cast iron, Nodular cast iron, Malleable cast iron), N (Aluminum-wrought alloy, Aluminum-cast alloy, Copper and Copper Alloys, Non Metallic Materials), S (Heat Resistant Super Alloys, Titanium Alloys), H (Hardened steel, Chilled Cast Iron, Hardened Cast Iron).




PLAIN SHANK HPI92 SERIES

CARBIDE, 2 FLUTE BALL NOSE for RIB PROCESSING with TAPER NECK

VOLLHARTMETALL, 2 SCHNEIDEN STIRNRADIUS für SCHMALE RIPPEN mit KONISCH ABGESETZTEM SCHAFTTEIL
Fraise carbure, 2 dents, hémisphérique pour usinage de rainure avec entrée conique
2 TAGLIENTI, SEMISFERICA, SCARICATA PER NERVATURE, SCARICO CONICO

- Improvement of tool life by applying new coating.
Application of tight tolerances for precision machining.

- Verbesserung der Werkzeugstandzeit durch Aufbringen einer neuen Beschichtung
Enge Toleranzen für die Präzisionsbearbeitung

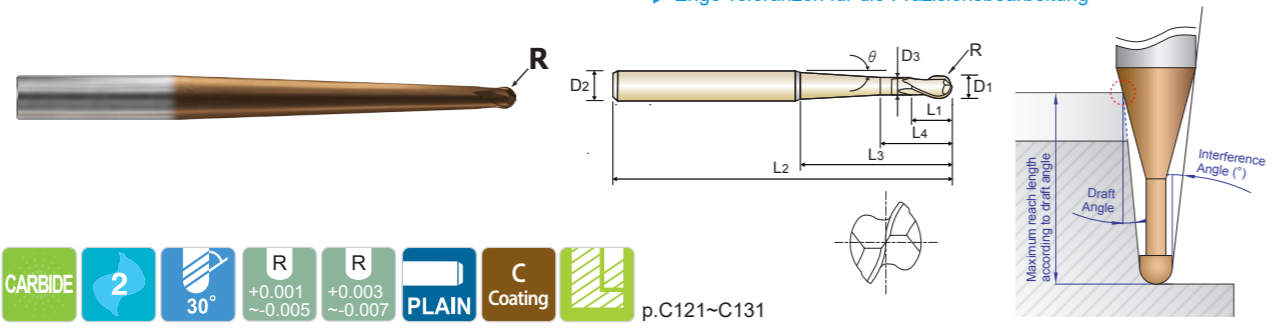

COATING, 2 FLUTES, RADIUS TOLERANCES, PLAIN SHANK, COATING, MAXIMUM REACH LENGTHS

Table with columns for EDP No., Radius of Ball Nose, Mill Diameter, Shank Diameter, Length of Cut, Length Below Shank, Overall Length, Neck Diameter, Neck Taper Angle, Under Neck Parallel Length, Interference Angle, and Maximum reach lengths (0.5 to 3 degrees).

Size, Radius Tolerance, Mill Dia. Tolerance, Shank Dia. Tolerance

ISO Material Recommendation chart for HPI92 series




PLAIN SHANK HPI92 SERIES

CARBIDE, 2 FLUTE BALL NOSE for RIB PROCESSING with TAPER NECK

VOLLHARTMETALL, 2 SCHNEIDEN STIRNRADIUS für SCHMALE RIPPEN mit KONISCH ABGESETZTEM SCHAFTTEIL
Fraise carbure, 2 dents, hémisphérique pour usinage de rainure avec entrée conique
2 TAGLIENTI, SEMISFERICA, SCARICATA PER NERVATURE, SCARICO CONICO

- Improvement of tool life by applying new coating.
Application of tight tolerances for precision machining.

- Verbesserung der Werkzeugstandzeit durch Aufbringen einer neuen Beschichtung
Enge Toleranzen für die Präzisionsbearbeitung

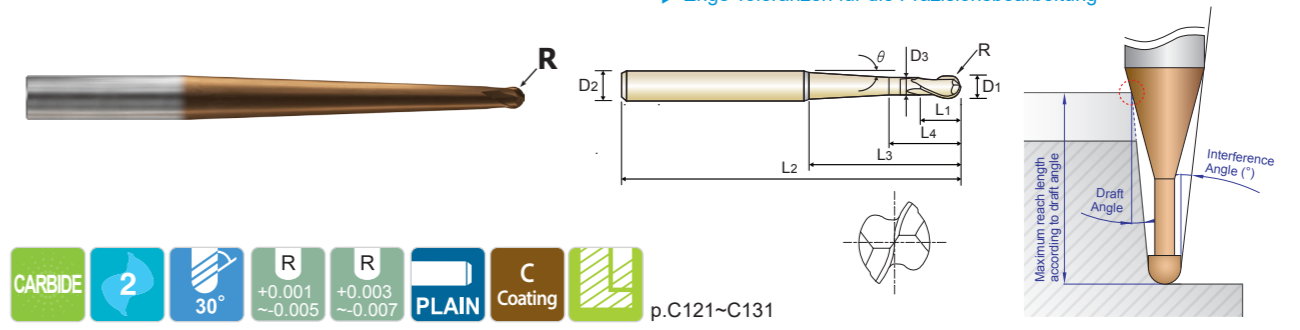

COATING, 2 FLUTES, RADIUS TOLERANCES, PLAIN SHANK, COATING, MAXIMUM REACH LENGTHS

Table with columns for EDP No., Radius of Ball Nose, Mill Diameter, Shank Diameter, Length of Cut, Length Below Shank, Overall Length, Neck Diameter, Neck Taper Angle, Under Neck Parallel Length, Interference Angle, and Maximum reach lengths (0.5 to 3 degrees).

Size, Radius Tolerance, Mill Dia. Tolerance, Shank Dia. Tolerance

ISO Material Recommendation chart for HPI92 series




PLAIN SHANK HPI92 SERIES

CARBIDE, 2 FLUTE BALL NOSE for RIB PROCESSING with TAPER NECK

- VOLLHARTMETALL, 2 SCHNEIDEN STIRNRADIUS für SCHMALE RIPPEN mit KONISCH ABGESETZTEM SCHAFTTEIL
• Fraise carbure, 2 dents, hémisphérique pour usinage de rainure avec entrée conique
• 2 TAGLIENTI, SEMISFERICA, SCARICATA PER NERVATURE, SCARICO CONICO

- ▶ Improvement of tool life by applying new coating.
▶ Application of tight tolerances for precision machining.

- ▶ Verbesserung der Werkzeugstandzeit durch Aufbringen einer neuen Beschichtung
▶ Enge Toleranzen für die Präzisionsbearbeitung

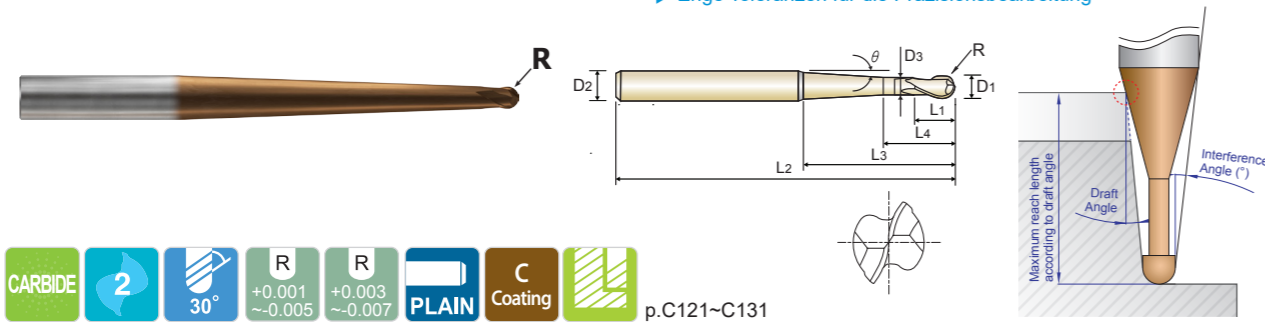

R0.05-R3 R3.5-R6

Unit : mm

Table with 15 columns: EDP No., Radius of Ball Nose, Mill Diameter, Shank Diameter, Length of Cut, Length Below Shank, Overall Length, Neck Diameter, Neck Taper Angle, Under Neck Parallel Length, Interference Angle, and Maximum reach lengths (0.5, 1, 1.5, 2, 3 degrees).

▶ NEXT PAGE

Table with 4 columns: Size, Radius Tolerance (mm), Mill Dia. Tolerance (mm), Shank Dia. Tolerance.

◎ : Excellent ○ : Good

ISO Material Recommendation table with columns for P (Non-alloy steel, Low alloy steel, High alloyed steel), M (Stainless steel), K (Grey cast iron, Nodular cast iron, Malleable cast iron), N (Aluminum-wrought alloy, Aluminum-cast alloy, Copper and Copper Alloys), S (Heat Resistant Super Alloys, Titanium Alloys), and H (Hardened steel, Chilled Cast Iron, Hardened Cast Iron).




PLAIN SHANK HPI92 SERIES

CARBIDE, 2 FLUTE BALL NOSE for RIB PROCESSING with TAPER NECK

- VOLLHARTMETALL, 2 SCHNEIDEN STIRNRADIUS für SCHMALE RIPPEN mit KONISCH ABGESETZTEM SCHAFTTEIL
• Fraise carbure, 2 dents, hémisphérique pour usinage de rainure avec entrée conique
• 2 TAGLIENTI, SEMISFERICA, SCARICATA PER NERVATURE, SCARICO CONICO

- ▶ Improvement of tool life by applying new coating.
▶ Application of tight tolerances for precision machining.

- ▶ Verbesserung der Werkzeugstandzeit durch Aufbringen einer neuen Beschichtung
▶ Enge Toleranzen für die Präzisionsbearbeitung

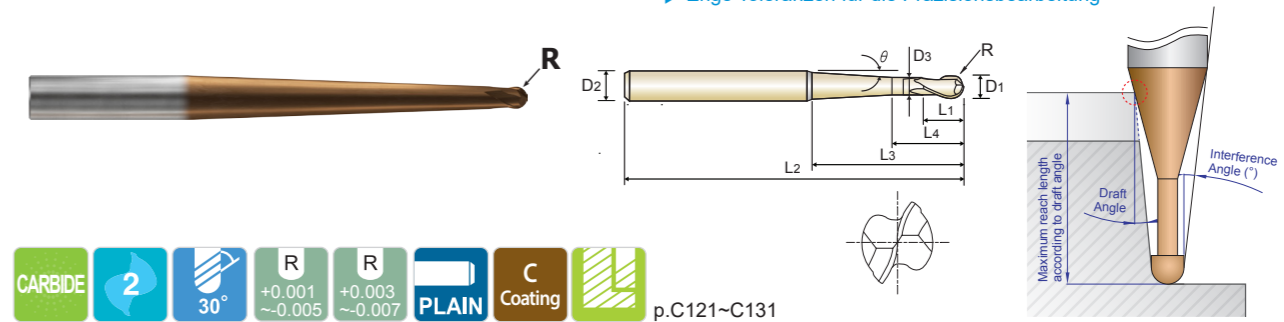

R0.05-R3 R3.5-R6

Unit : mm

Table with 15 columns: EDP No., Radius of Ball Nose, Mill Diameter, Shank Diameter, Length of Cut, Length Below Shank, Overall Length, Neck Diameter, Neck Taper Angle, Under Neck Parallel Length, Interference Angle, and Maximum reach lengths (0.5, 1, 1.5, 2, 3 degrees).

▶ NEXT PAGE

Table with 4 columns: Size, Radius Tolerance (mm), Mill Dia. Tolerance (mm), Shank Dia. Tolerance.

◎ : Excellent ○ : Good

ISO Material Recommendation table with columns for P (Non-alloy steel, Low alloy steel, High alloyed steel), M (Stainless steel), K (Grey cast iron, Nodular cast iron, Malleable cast iron), N (Aluminum-wrought alloy, Aluminum-cast alloy, Copper and Copper Alloys), S (Heat Resistant Super Alloys, Titanium Alloys), and H (Hardened steel, Chilled Cast Iron, Hardened Cast Iron).




PLAIN SHANK HPI89 SERIES

CARBIDE, 2 FLUTE CORNER RADIUS for RIB PROCESSING

- VOLLHARTMETALL, 2 SCHNEIDEN ECKENRADIUS für SCHMALE RIPPEN
Fraise carbure, 2 dents, torique pour usinage de rainure
2 TAGLIENTI, TORICA PER NERVATURE

- Improvement of tool life by applying new coating.
Application of tight tolerances for precision machining.

- Verbesserung der Werkzeugstandzeit durch Aufbringen einer neuen Beschichtung
Enge Toleranzen für die Präzisionsbearbeitung

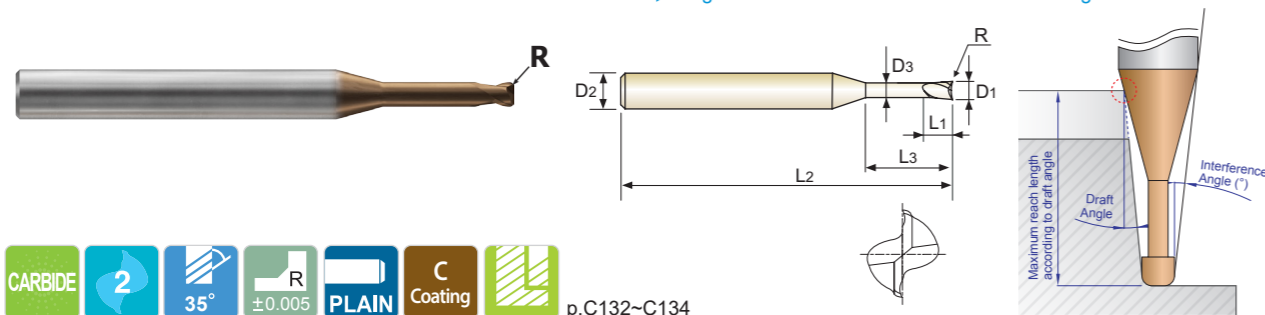

Unit : mm

Table with columns: EDP No., Corner Radius, Mill Diameter, Shank Diameter, Length of Cut, Length Below Shank, Overall Length, Neck Diameter, Interference Angle, and Maximum reach lengths according to draft angle (0.5°, 1°, 1.5°, 2°, 3°).

▶ NEXT PAGE

Table with 3 columns: Corner Radius Tolerance (mm) ±0.005, Mill Dia. Tolerance (mm) 0~-0.010, Shank Dia. Tolerance h4

◎ : Excellent ○ : Good

ISO material compatibility chart with columns for P (Non-alloy steel, Low alloy steel, High alloyed steel, Stainless steel), M (Grey cast iron, Nodular cast iron, Malleable cast iron), N (Aluminum-wrought alloy, Aluminum-cast alloy, Copper and Copper Alloys, Non Metallic Materials), S (Heat Resistant Super Alloys, Titanium Alloys), and H (Hardened steel, Chilled Cast Iron, Hardened Cast Iron).




PLAIN SHANK HPI89 SERIES

CARBIDE, 2 FLUTE CORNER RADIUS for RIB PROCESSING

- VOLLHARTMETALL, 2 SCHNEIDEN ECKENRADIUS für SCHMALE RIPPEN
Fraise carbure, 2 dents, torique pour usinage de rainure
2 TAGLIENTI, TORICA PER NERVATURE

- Improvement of tool life by applying new coating.
Application of tight tolerances for precision machining.

- Verbesserung der Werkzeugstandzeit durch Aufbringen einer neuen Beschichtung
Enge Toleranzen für die Präzisionsbearbeitung

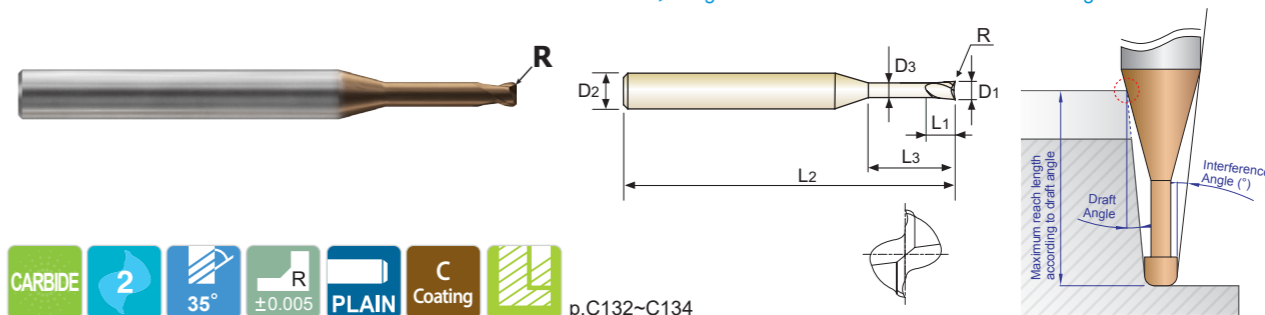

Unit : mm

Table with columns: EDP No., Corner Radius, Mill Diameter, Shank Diameter, Length of Cut, Length Below Shank, Overall Length, Neck Diameter, Interference Angle, and Maximum reach lengths according to draft angle (0.5°, 1°, 1.5°, 2°, 3°).

▶ NEXT PAGE

Table with 3 columns: Corner Radius Tolerance (mm) ±0.005, Mill Dia. Tolerance (mm) 0~-0.010, Shank Dia. Tolerance h4

◎ : Excellent ○ : Good


ISO material compatibility chart with columns for P (Non-alloy steel, Low alloy steel, High alloyed steel, Stainless steel), M (Grey cast iron, Nodular cast iron, Malleable cast iron), N (Aluminum-wrought alloy, Aluminum-cast alloy, Copper and Copper Alloys, Non Metallic Materials), S (Heat Resistant Super Alloys, Titanium Alloys), and H (Hardened steel, Chilled Cast Iron, Hardened Cast Iron).

CARBIDE, 2 FLUTE CORNER RADIUS for RIB PROCESSING

- VOLLHARTMETALL, 2 SCHNEIDEN ECKENRADIUS für SCHMALE RIPPEN
Fraise carbure, 2 dents, torique pour usinage de rainure
2 TAGLIENTI, TORICA PER NERVATURE

- Improvement of tool life by applying new coating.
Application of tight tolerances for precision machining.

- Verbesserung der Werkzeugstandzeit durch Aufbringen einer neuen Beschichtung
Enge Toleranzen für die Präzisionsbearbeitung

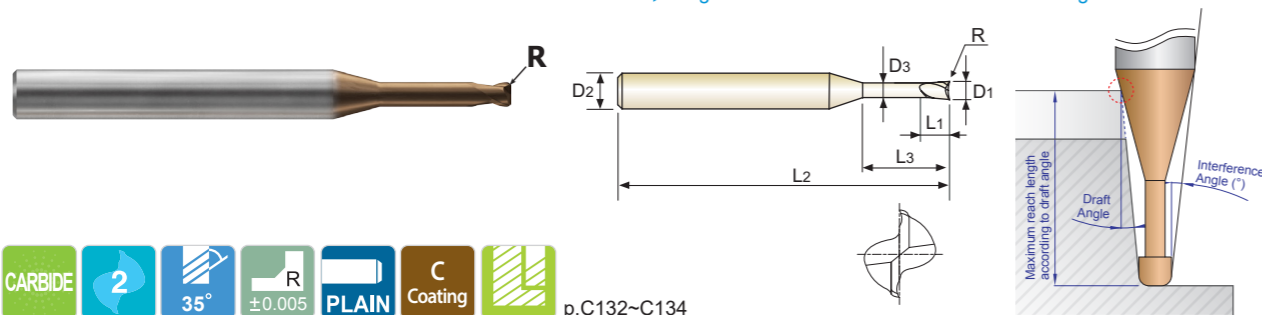

Unit : mm

Table with columns: EDP No., Corner Radius, Mill Diameter, Shank Diameter, Length of Cut, Length Below Shank, Overall Length, Neck Diameter, Interference Angle, Maximum reach lengths according to draft angle (0.5°, 1°, 1.5°, 2°, 3°). Rows include HPI89972 to HPI89995.

▶ NEXT PAGE

Table with 3 columns: Corner Radius Tolerance (mm) ±0.005, Mill Dia. Tolerance (mm) 0~-0.010, Shank Dia. Tolerance h4

◎ : Excellent ○ : Good


ISO material compatibility chart with columns for P (Non-alloy steel, Low alloy steel, High alloyed steel, Stainless steel), M (Grey cast iron, Nodular cast iron, Malleable cast iron), N (Aluminum-wrought alloy, Aluminum-cast alloy, Copper and Copper Alloys, Non Metallic Materials), S (Heat Resistant Super Alloys, Titanium Alloys), H (Hardened steel, Chilled Cast Iron, Hardened Cast Iron).

CARBIDE, 2 FLUTE CORNER RADIUS for RIB PROCESSING

- VOLLHARTMETALL, 2 SCHNEIDEN ECKENRADIUS für SCHMALE RIPPEN
Fraise carbure, 2 dents, torique pour usinage de rainure
2 TAGLIENTI, TORICA PER NERVATURE

- Improvement of tool life by applying new coating.
Application of tight tolerances for precision machining.

- Verbesserung der Werkzeugstandzeit durch Aufbringen einer neuen Beschichtung
Enge Toleranzen für die Präzisionsbearbeitung

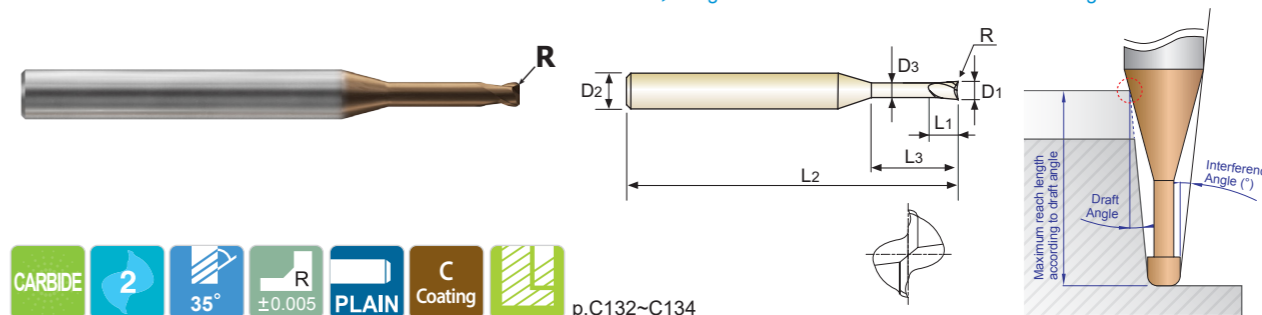

Unit : mm

Table with columns: EDP No., Corner Radius, Mill Diameter, Shank Diameter, Length of Cut, Length Below Shank, Overall Length, Neck Diameter, Interference Angle, Maximum reach lengths according to draft angle (0.5°, 1°, 1.5°, 2°, 3°). Rows include HPI89996 to HPI89820.

▶ NEXT PAGE

Table with 3 columns: Corner Radius Tolerance (mm) ±0.005, Mill Dia. Tolerance (mm) 0~-0.010, Shank Dia. Tolerance h4

◎ : Excellent ○ : Good

ISO material compatibility chart with columns for P (Non-alloy steel, Low alloy steel, High alloyed steel, Stainless steel), M (Grey cast iron, Nodular cast iron, Malleable cast iron), N (Aluminum-wrought alloy, Aluminum-cast alloy, Copper and Copper Alloys, Non Metallic Materials), S (Heat Resistant Super Alloys, Titanium Alloys), H (Hardened steel, Chilled Cast Iron, Hardened Cast Iron).




PLAIN SHANK HPI89 SERIES

CARBIDE, 2 FLUTE CORNER RADIUS for RIB PROCESSING

- VOLLHARTMETALL, 2 SCHNEIDEN ECKENRADIUS für SCHMALE RIPPEN
Fraise carbure, 2 dents, torique pour usinage de rainure
2 TAGLIENTI, TORICA PER NERVATURE

- Improvement of tool life by applying new coating.
Application of tight tolerances for precision machining.

- Verbesserung der Werkzeugstandzeit durch Aufbringen einer neuen Beschichtung
Enge Toleranzen für die Präzisionsbearbeitung

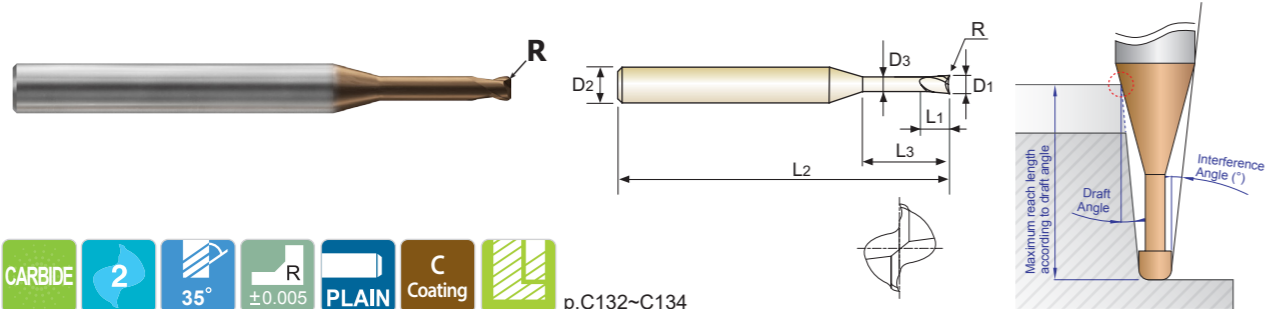

Icons for Carbide, 2 flutes, 35 degree angle, R corner, Plain shank, Coating, and p.C132~C134.

Unit : mm

Main table with 13 columns: EDP No., Corner Radius, Mill Diameter, Shank Diameter, Length of Cut, Length Below Shank, Overall Length, Neck Diameter, Interference Angle, and Maximum reach lengths (0.5 to 3 degrees).

Corner Radius, Mill Dia., and Shank Dia. Tolerance table.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO material compatibility table with columns for Non-alloy steel, Low alloy steel, High alloyed steel, Stainless steel, Grey cast iron, Nodular cast iron, Malleable cast iron, Aluminum, Copper, Titanium, and Hardened steel.




PLAIN SHANK HPI89 SERIES

CARBIDE, 2 FLUTE CORNER RADIUS for RIB PROCESSING

- VOLLHARTMETALL, 2 SCHNEIDEN ECKENRADIUS für SCHMALE RIPPEN
Fraise carbure, 2 dents, torique pour usinage de rainure
2 TAGLIENTI, TORICA PER NERVATURE

- Improvement of tool life by applying new coating.
Application of tight tolerances for precision machining.

- Verbesserung der Werkzeugstandzeit durch Aufbringen einer neuen Beschichtung
Enge Toleranzen für die Präzisionsbearbeitung

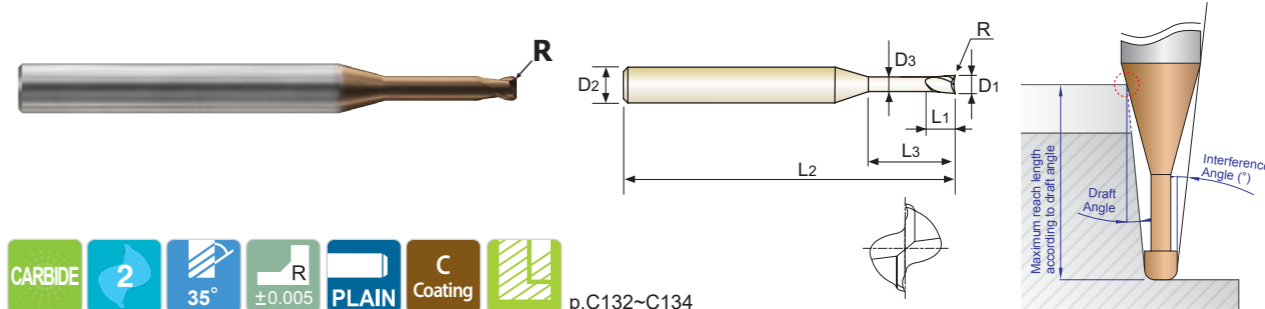

Icons for Carbide, 2 flutes, 35 degree angle, R corner, Plain shank, Coating, and p.C132~C134.

Unit : mm

Main table with 13 columns: EDP No., Corner Radius, Mill Diameter, Shank Diameter, Length of Cut, Length Below Shank, Overall Length, Neck Diameter, Interference Angle, and Maximum reach lengths (0.5 to 3 degrees).

Corner Radius, Mill Dia., and Shank Dia. Tolerance table.




PLAIN SHANK HPI88 SERIES

CARBIDE, 2 FLUTE for RIB PROCESSING

- VOLLHARTMETALL, 2 SCHNEIDEN für SCHMALE RIPPEN
Fraise carbure, 2 dents pour usinage de rainure
2 TAGLIENTI, SCARICATA PER NERVATURE

- Improvement of tool life by applying new coating.
Application of tight tolerances for precision machining.

- Verbesserung der Werkzeugstandzeit durch Aufbringen einer neuen Beschichtung
Enge Toleranzen für die Präzisionsbearbeitung

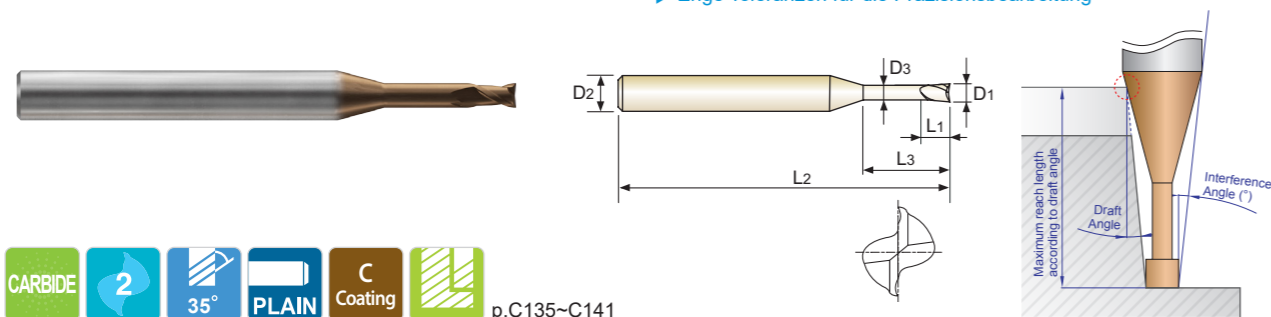

Unit : mm

Table with columns: EDP No., Mill Diameter, Shank Diameter, Length of Cut, Length Below Shank, Overall Length, Neck Diameter, Interference Angle, Maximum reach lengths according to draft angle (0.5°, 1°, 1.5°, 2°, 3°). Rows include HPI88001 to HPI88921.

▶ NEXT PAGE

Table with columns: Mill Dia. Tolerance (mm), Shank Dia. Tolerance. Values: 0~-0.010, h4

◎ : Excellent ○ : Good

ISO material compatibility chart with columns for P (Non-alloy steel, Low alloy steel, High alloyed steel, Stainless steel), M (Grey cast iron, Nodular cast iron, Malleable cast iron), N (Aluminum-wrought alloy, Aluminum-cast alloy, Copper and Copper Alloys, Non Metallic Materials), S (Heat Resistant Super Alloys, Titanium Alloys), H (Hardened steel, Chilled Cast Iron, Hardened Cast Iron).




PLAIN SHANK HPI88 SERIES

CARBIDE, 2 FLUTE for RIB PROCESSING

- VOLLHARTMETALL, 2 SCHNEIDEN für SCHMALE RIPPEN
Fraise carbure, 2 dents pour usinage de rainure
2 TAGLIENTI, SCARICATA PER NERVATURE

- Improvement of tool life by applying new coating.
Application of tight tolerances for precision machining.

- Verbesserung der Werkzeugstandzeit durch Aufbringen einer neuen Beschichtung
Enge Toleranzen für die Präzisionsbearbeitung

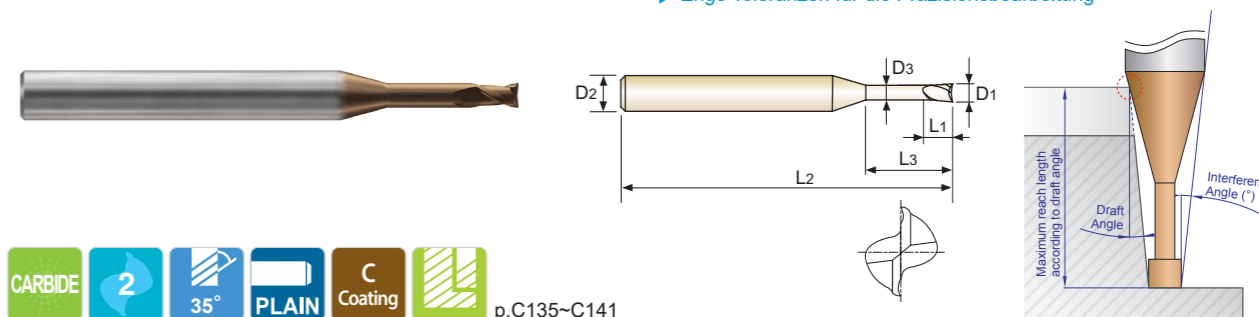

Unit : mm

Table with columns: EDP No., Mill Diameter, Shank Diameter, Length of Cut, Length Below Shank, Overall Length, Neck Diameter, Interference Angle, Maximum reach lengths according to draft angle (0.5°, 1°, 1.5°, 2°, 3°). Rows include HPI88922 to HPI88945.

▶ NEXT PAGE

Table with columns: Mill Dia. Tolerance (mm), Shank Dia. Tolerance. Values: 0~-0.010, h4

◎ : Excellent ○ : Good


ISO material compatibility chart with columns for P (Non-alloy steel, Low alloy steel, High alloyed steel, Stainless steel), M (Grey cast iron, Nodular cast iron, Malleable cast iron), N (Aluminum-wrought alloy, Aluminum-cast alloy, Copper and Copper Alloys, Non Metallic Materials), S (Heat Resistant Super Alloys, Titanium Alloys), H (Hardened steel, Chilled Cast Iron, Hardened Cast Iron).

CARBIDE, 2 FLUTE for RIB PROCESSING

● **VOLLHARTMETALL, 2 SCHNEIDEN für SCHMALE RIPPEN**
 (●) **Fraise carbure, 2 dents pour usinage de rainure**
 (●) **2 TAGLIENTI, SCARICATA PER NERVATURE**

- ▶ Improvement of tool life by applying new coating.
- ▶ Application of tight tolerances for precision machining.

- ▶ **Verbesserung der Werkzeugstandzeit durch Aufbringen einer neuen Beschichtung**
- ▶ **Enge Toleranzen für die Präzisionsbearbeitung**

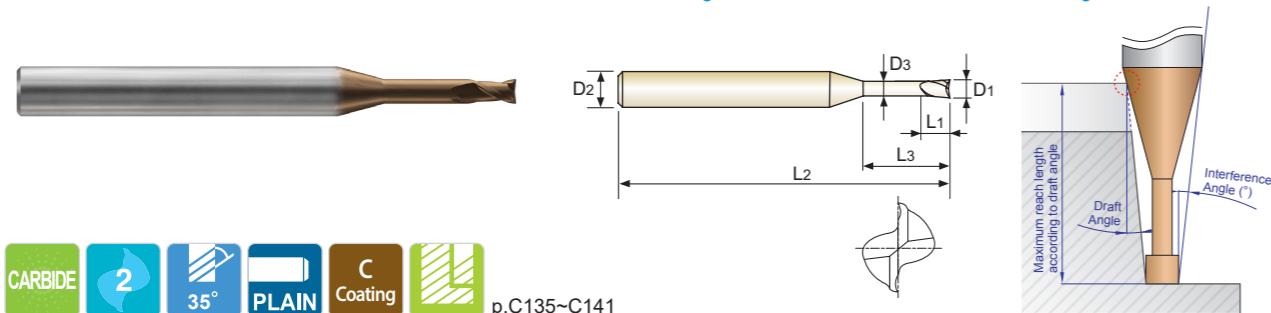

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Interference Angle(°)	Maximum reach lengths according to draft angle				
								0.5°	1°	1.5°	2°	3°
HPI88007	0.7	4	0.55	2	45	0.65	11.31	2.25	2.38	2.52	2.67	3.05
HPI88946	0.7	4	0.55	4	45	0.65	9.14	4.36	4.60	4.86	5.16	5.89
HPI88947	0.7	4	0.55	6	45	0.65	7.67	6.46	6.82	7.21	7.66	8.74
HPI88948	0.7	4	0.55	8	50	0.65	6.60	8.57	9.04	9.56	10.15	11.35
HPI88949	0.7	4	0.55	10	50	0.65	5.80	10.67	11.26	11.91	12.65	13.69
HPI88008	0.8	4	0.65	3	45	0.75	10.01	3.31	3.49	3.69	3.92	4.47
HPI88950	0.8	4	0.65	4	45	0.75	9.03	4.36	4.60	4.86	5.16	5.89
HPI88951	0.8	4	0.65	5	45	0.75	8.23	5.41	5.71	6.04	6.41	7.32
HPI88952	0.8	4	0.65	6	45	0.75	7.55	6.46	6.82	7.21	7.66	8.74
HPI88953	0.8	4	0.65	8	50	0.75	6.49	8.57	9.04	9.56	10.15	11.29
HPI88954	0.8	4	0.65	10	50	0.75	5.69	10.67	11.26	11.91	12.65	13.63
HPI88955	0.8	4	0.65	12	50	0.75	5.06	12.77	13.48	14.26	15.12	15.97
HPI88010	1.0	4	0.8	2	50	0.95	11.04	2.25	2.38	2.52	2.67	3.05
HPI88956	1.0	4	0.8	3	50	0.95	9.79	3.31	3.49	3.69	3.92	4.47
HPI88957	1.0	4	0.8	4	50	0.95	8.80	4.36	4.60	4.86	5.16	5.89
HPI88958	1.0	4	0.8	5	50	0.95	7.99	5.41	5.71	6.04	6.41	7.32
HPI88959	1.0	4	0.8	6	50	0.95	7.31	6.46	6.82	7.21	7.66	8.74
HPI88960	1.0	4	0.8	7	50	0.95	6.74	7.51	7.93	8.39	8.91	10.01
HPI88961	1.0	4	0.8	8	50	0.95	6.25	8.57	9.04	9.56	10.15	11.18
HPI88962	1.0	4	0.8	9	50	0.95	5.83	9.62	10.15	10.74	11.40	12.35
HPI88963	1.0	4	0.8	10	50	0.95	5.46	10.67	11.26	11.91	12.65	13.52
HPI88964	1.0	4	0.8	12	50	0.95	4.85	12.77	13.48	14.26	15.01	15.85
HPI88965	1.0	4	0.8	14	50	0.95	4.36	14.88	15.70	16.61	17.22	18.19
HPI88966	1.0	4	0.8	16	60	0.95	3.96	16.98	17.92	18.93	19.43	20.53
HPI88967	1.0	4	0.8	18	60	0.95	3.62	19.09	20.13	21.09	21.65	22.86
HPI88968	1.0	4	0.8	20	60	0.95	3.34	21.19	22.35	23.24	23.86	25.20

▶ NEXT PAGE

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0~-0.010	h4

◎ : Excellent ○ : Good

ISO	P											M			K						
	Non-alloy steel					Low alloy steel						High alloyed steel, and tool steel			Stainless steel			Grey cast iron	Nodular cast iron	Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20
HRc	13	25	28	32	38	29	32	38	44	15	35	44	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230
Recommend					○			○	○												


ISO	N				S				H															
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel				Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRc											15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739		400	550
Recommend											◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

CARBIDE, 2 FLUTE for RIB PROCESSING

● **VOLLHARTMETALL, 2 SCHNEIDEN für SCHMALE RIPPEN**
 (●) **Fraise carbure, 2 dents pour usinage de rainure**
 (●) **2 TAGLIENTI, SCARICATA PER NERVATURE**

- ▶ Improvement of tool life by applying new coating.
- ▶ Application of tight tolerances for precision machining.

- ▶ **Verbesserung der Werkzeugstandzeit durch Aufbringen einer neuen Beschichtung**
- ▶ **Enge Toleranzen für die Präzisionsbearbeitung**

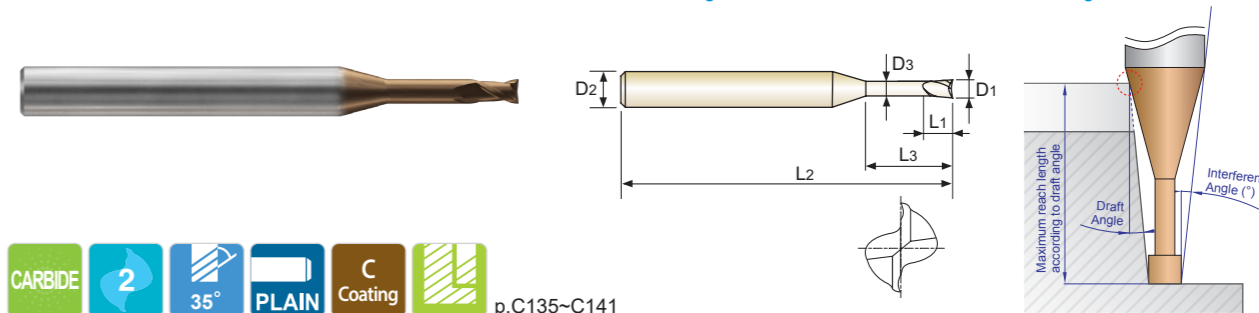

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Interference Angle(°)	Maximum reach lengths according to draft angle				
								0.5°	1°	1.5°	2°	3°
HPI88969	1.0	4	0.8	22	60	0.95	3.10	23.29	24.57	25.40	26.07	27.53
HPI88012	1.2	4	1	6	50	1.15	7.05	6.30	6.52	6.75	7.01	7.57
HPI88970	1.2	4	1	8	50	1.15	6.00	8.37	8.66	8.97	9.31	10.06
HPI88971	1.2	4	1	10	50	1.15	5.22	10.43	10.80	11.19	11.61	12.55
HPI88972	1.2	4	1	12	50	1.15	4.62	12.50	12.94	13.40	13.91	15.03
HPI88973	1.2	4	1	16	60	1.15	3.76	16.64	17.21	17.84	18.50	20.01
HPI88014	1.4	4	1.1	6	50	1.35	6.77	6.30	6.52	6.75	7.01	7.57
HPI88974	1.4	4	1.1	12	50	1.35	4.39	12.50	12.94	13.40	13.91	15.03
HPI88015	1.5	4	1.2	4	50	1.45	8.12	4.23	4.38	4.54	4.71	5.09
HPI88975	1.5	4	1.2	6	50	1.45	6.63	6.30	6.52	6.75	7.01	7.57
HPI88976	1.5	4	1.2	8	50	1.45	5.60	8.37	8.66	8.97	9.31	10.06
HPI88977	1.5	4	1.2	10	50	1.45	4.84	10.43	10.80	11.19	11.61	12.55
HPI88978	1.5	4	1.2	12	50	1.45	4.27	12.50	12.94	13.40	13.91	15.03
HPI88979	1.5	4	1.2	14	60	1.45	3.81	14.57	15.08	15.62	16.21	17.52
HPI88980	1.5	4	1.2	16	60	1.45	3.45	16.64	17.21	17.84	18.50	20.01
HPI88981	1.5	4	1.2	18	60	1.45	3.14	18.70	19.35	20.05	20.80	22.49
HPI88982	1.5	4	1.2	20	60	1.45	2.89	20.77	21.49	22.27	23.10	-
HPI88983	1.5	4	1.2	25	70	1.45	2.41	25.94	26.84	27.81	28.85	-
HPI88984	1.5	4	1.2	30	70	1.45	2.06	31.11	32.19	33.35	34.60	-
HPI88985	1.5	4	1.2	35	80	1.45	1.80	36.27	37.54	38.89	-	-
HPI88016	1.6	4	1.3	6	50	1.55	6.48	6.30	6.52	6.75	7.01	7.57
HPI88986	1.6	4	1.3	8	50	1.55	5.45	8.37	8.66	8.97	9.31	10.06
HPI88018	1.8	4	1.4	6	50	1.75	6.16	6.30	6.52	6.75	7.01	7.57
HPI88987	1.8	4	1.4	8	50	1.75	5.15	8.37	8.66	8.97	9.31	10.06
HPI88988	1.8	4	1.4	10	50	1.75	4.43	10.43	10.80	11.19	11.61	12.55
HPI88989	1.8	4	1.4	12	50	1.75	3.88	12.50	12.94	13.40	13.91	15.03

▶ NEXT PAGE

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0~-0.010	h4

◎ : Excellent ○ : Good

ISO	P											M			K						
	Non-alloy steel					Low alloy steel						High alloyed steel, and tool steel			Stainless steel			Grey cast iron	Nodular cast iron	Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20
HRc	13	25	28	32	38	29	32	38	44	15	35	44	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230
Recommend					○			○	○												

ISO	N				S				H															
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel				Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRc											15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739		400	550
Recommend											◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎



RECOMMENDED CUTTING CONDITIONS EMPFOHLENE SCHNEIDPARAMETER




RECOMMENDED CUTTING CONDITIONS EMPFOHLENE SCHNEIDPARAMETER

HPI90 SERIES 2 FLUTE BALL NOSE

Table with columns for ISO, VDI 3323, Material Description, Ae, Ap, Parameter, and Diameter (Ø) from 0.2 to 20.0. Rows include Vc, fz, RPM, and FEED for various materials like Non-alloy steel, Low alloy steel, High alloyed steel, and Hardened steel.


Vc = m/min. fz = mm/tooth RPM = rev./min. FEED = mm/min.



HPI91, HPI92 SERIES 2 FLUTE BALL NOSE FOR RIB PROCESSING

Table with columns for ISO, VDI 3323, Material Description, Parameter, and Diameter (Ø) from 0.2 to 20.0. Rows include Vc, fz, RPM, and FEED for various materials like Non-alloy steel, Low alloy steel, High alloyed steel, and Hardened steel.

Vc = m/min. fz = mm/tooth RPM = rev./min. FEED = mm/min. Ap = mm LBS = Length Below Shank



▶ NEXT PAGE




RECOMMENDED CUTTING CONDITIONS EMPFOHLENE SCHNEIDPARAMETER

Vc = m/min. fz = mm/tooth RPM = rev./min. FEED = mm/min. Ap = mm LBS = Length Below Shank

HPI91, HPI92 SERIES 2 FLUTE BALL NOSE for RIB PROCESSING

Table with columns for ISO, VDI 3323, Parameter (LBS), Diameter (Ø) (0.3 to 0.5), and rows for Vc, fz, RPM, FEED, Ap for series P (5, 8-9, 11.1, 11.2) and H (38.1, 38.2, 39.1, 39.2, 39.3, 40, 41).

▶ NEXT PAGE




RECOMMENDED CUTTING CONDITIONS EMPFOHLENE SCHNEIDPARAMETER

Vc = m/min. fz = mm/tooth RPM = rev./min. FEED = mm/min. Ap = mm LBS = Length Below Shank

HPI91, HPI92 SERIES 2 FLUTE BALL NOSE FOR RIB PROCESSING

Table with columns for ISO, VDI 3323, Parameter (LBS), Diameter (Ø) (0.5 to 0.6), and rows for Vc, fz, RPM, FEED, Ap for series P (5, 8-9, 11.1, 11.2) and H (38.1, 38.2, 39.1, 39.2, 39.3, 40, 41).

▶ NEXT PAGE






RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.
Ap = mm
LBS = Length Below Shank

HPI91, HPI92 SERIES 2 FLUTE BALL NOSE for RIB PROCESSING

Table with columns for ISO, VDI 3323, Parameter (LBS), Diameter (Ø) (0.6 to 0.9), and rows for Vc, fz, RPM, FEED, Ap for series P (5, 8-9, 11.1, 11.2) and H (38.1, 38.2, 39.1, 39.2, 39.3, 40, 41).

▶ NEXT PAGE




RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.
Ap = mm
LBS = Length Below Shank

HPI91, HPI92 SERIES 2 FLUTE BALL NOSE for RIB PROCESSING

Table with columns for ISO, VDI 3323, Parameter (LBS), Diameter (Ø) (0.9 to 1.1), and rows for Vc, fz, RPM, FEED, Ap for series P (5, 8-9, 11.1, 11.2) and H (38.1, 38.2, 39.1, 39.2, 39.3, 40, 41).

▶ NEXT PAGE






RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

HPI91, HPI92 SERIES 2 FLUTE BALL NOSE for RIB PROCESSING

Table with columns for ISO, VDI 3323, Parameter (LBS), Diameter (mm) from 1 to 16, and rows for Vc, fz, RPM, FEED, Ap for series P (5, 8-9, 11.1, 11.2) and H (38.1, 38.2, 39.1, 39.2, 39.3, 40, 41).

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.
Ap = mm
LBS = Length Below Shank



▶ NEXT PAGE




RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

HPI91, HPI92 SERIES 2 FLUTE BALL NOSE for RIB PROCESSING

Table with columns for ISO, VDI 3323, Parameter (LBS), Diameter (mm) from 1 to 22, and rows for Vc, fz, RPM, FEED, Ap for series P (5, 8-9, 11.1, 11.2) and H (38.1, 38.2, 39.1, 39.2, 39.3, 40, 41).

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.
Ap = mm
LBS = Length Below Shank



▶ NEXT PAGE




RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

Vc = m/min.
fz = mm/tooth
RPM = rev/min.
FEED = mm/min.
Ap = mm
LBS = Length Below Shank

HPI91, HPI92 SERIES 2 FLUTE BALL NOSE for RIB PROCESSING

Table with columns for ISO, VDI 3323, Parameter (LBS), Diameter (mm) from 2 to 25, and rows for Vc, fz, RPM, FEED, Ap for series P (5, 8-9, 11.1, 11.2) and H (38.1, 38.2, 39.1, 39.2, 39.3, 40, 41).



▶ NEXT PAGE




RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

Vc = m/min.
fz = mm/tooth
RPM = rev/min.
FEED = mm/min.
Ap = mm
LBS = Length Below Shank

HPI91, HPI92 SERIES 2 FLUTE BALL NOSE for RIB PROCESSING

Table with columns for ISO, VDI 3323, Parameter (LBS), Diameter (mm) from 3 to 40, and rows for Vc, fz, RPM, FEED, Ap for series P (5, 8-9, 11.1, 11.2) and H (38.1, 38.2, 39.1, 39.2, 39.3, 40, 41).



▶ NEXT PAGE




RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

Vc = m/min.
fz = mm/tooth
RPM = rev/min.
FEED = mm/min.
Ap = mm
LBS = Length Below Shank

HPI91, HPI92 SERIES 2 FLUTE BALL NOSE for RIB PROCESSING

Table with columns for ISO, VDI 3323, Parameter (LBS), Diameter (mm) from 4 to 60, and rows for Vc, fz, RPM, FEED, Ap for ISO P and H grades.

NEXT PAGE




RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

Vc = m/min.
fz = mm/tooth
RPM = rev/min.
FEED = mm/min.
Ap = mm
LBS = Length Below Shank

HPI91, HPI92 SERIES 2 FLUTE BALL NOSE for RIB PROCESSING

Table with columns for ISO, VDI 3323, Parameter (LBS), Diameter (mm) from 8 to 120, and rows for Vc, fz, RPM, FEED, Ap for ISO P and H grades.






RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.
Ap = mm
LBS = Length Below Shank

HPI89 SERIES 2 FLUTE CORNER RADIUS for RIB PROCESSING

Table with columns for ISO, VDI 3323, Material Description, Slotting, Parameter, and Diameter (Ø) for various materials like Non-alloy steel, Low alloy steel, High alloyed steel, and Hardened steel.

▶ NEXT PAGE




RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.
Ap = mm
LBS = Length Below Shank

HPI89 SERIES 2 FLUTE CORNER RADIUS for RIB PROCESSING

Table with columns for ISO, VDI 3323, Material Description, Slotting, Parameter, and Diameter (Ø) for various materials like Non-alloy steel, Low alloy steel, High alloyed steel, and Hardened steel.

▶ NEXT PAGE






RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

Vc = m/min.
fz = mm/tooth
RPM = rev/min.
FEED = mm/min.
Ap = mm
LBS = Length Below Shank

HPI89 SERIES 2 FLUTE CORNER RADIUS for RIB PROCESSING

Table with columns for ISO, VDI 3323, Material Description, Slotting, Parameter, and Diameter (Ø) for various materials and ISO grades (5, 8-9, 11.1, 11.2, 38.1, 38.2, 39.1, 39.2, 39.3, 40, 41).




RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

Vc = m/min.
fz = mm/tooth
RPM = rev/min.
FEED = mm/min.
Ap = mm
LBS = Length Below Shank

HPI88 SERIES 2 FLUTE for RIB PROCESSING

Table with columns for ISO, VDI 3323, Material Description, Slotting, Parameter, and Diameter (Ø) for various materials and ISO grades (5, 8-9, 11.1, 11.2, 38.1, 38.2, 39.1, 39.2, 39.3, 40, 41).



NEXT PAGE




RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.
Ap = mm
LBS = Length Below Shank

HPI88 SERIES 2 FLUTE SQUARE for RIB PROCESSING

Table with columns for ISO, VDI 3323, Parameter (LBS), Diameter (mm) from 0.4 to 6.3, and rows for Vc, fz, RPM, FEED, Ap for series P (5, 8-9, 11.1, 11.2) and H (38.1, 38.2, 39.1, 39.2, 39.3, 40, 41).

▶ NEXT PAGE




RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.
Ap = mm
LBS = Length Below Shank

HPI88 SERIES 2 FLUTE SQUARE for RIB PROCESSING

Table with columns for ISO, VDI 3323, Parameter (LBS), Diameter (mm) from 0.6 to 6.3, and rows for Vc, fz, RPM, FEED, Ap for series P (5, 8-9, 11.1, 11.2) and H (38.1, 38.2, 39.1, 39.2, 39.3, 40, 41).

▶ NEXT PAGE






RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

Vc = m/min.
fz = mm/tooth
RPM = rev/min.
FEED = mm/min.
Ap = mm
LBS = Length Below Shank

HPI88 SERIES 2 FLUTE SQUARE for RIB PROCESSING

Table with columns for ISO, VDI 3323, Parameter, Diameter (D), and various cutting parameters (Vc, fz, RPM, FEED, Ap) for different series (P, H) and sizes (5, 8-9, 11.1, 11.2, 38.1, 38.2, 39.1, 39.2, 39.3, 40, 41).

▶ NEXT PAGE




RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

Vc = m/min.
fz = mm/tooth
RPM = rev/min.
FEED = mm/min.
Ap = mm
LBS = Length Below Shank

HPI88 SERIES 2 FLUTE SQUARE for RIB PROCESSING

Table with columns for ISO, VDI 3323, Parameter, Diameter (D), and various cutting parameters (Vc, fz, RPM, FEED, Ap) for different series (P, H) and sizes (5, 8-9, 11.1, 11.2, 38.1, 38.2, 39.1, 39.2, 39.3, 40, 41).

▶ NEXT PAGE






RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

Vc = m/min.
fz = mm/tooth
RPM = rev/min.
FEED = mm/min.
Ap = mm
LBS = Length Below Shank

HPI88 SERIES 2 FLUTE SQUARE for RIB PROCESSING

Table with columns for ISO, VDI 3323, Parameter (LBS), Diameter (Ø), and various cutting parameters (Vc, fz, RPM, FEED, Ap) for different tool types (P, H) and sizes (5, 8-9, 11.1, 11.2, 38.1, 38.2, 39.1, 39.2, 39.3, 40, 41).

▶ NEXT PAGE




RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

Vc = m/min.
fz = mm/tooth
RPM = rev/min.
FEED = mm/min.
Ap = mm
LBS = Length Below Shank

HPI88 SERIES 2 FLUTE SQUARE for RIB PROCESSING

Table with columns for ISO, VDI 3323, Parameter (LBS), Diameter (Ø), and various cutting parameters (Vc, fz, RPM, FEED, Ap) for different tool types (P, H) and sizes (5, 8-9, 11.1, 11.2, 38.1, 38.2, 39.1, 39.2, 39.3, 40, 41).





Global Cutting Tool Leader **YG-1**



MILLING