



Leading Through Innovation

SOLID CARBIDE & HSS-E

YG TAP HARDENED

YG GEWINDEBOHRER FÜR GEHÄRTET

- For Hardened Steels Applications to Control the Continuous and Red-glowing Chips
- Für gehärtete Stähle zur Kontrolle der kontinuierlichen und rotglühenden Späne

SELECTION GUIDE



SOLID CARBIDE & HSS-E YG TAP HARDENED

For Hardened Steels Applications to Control the Continuous and Red-glowing Chips

Please visit globalyg1.com/mat for material search. Recommended cutting conditions : p.B217

Table with columns: ISO, VDI 3323, Material Description, Composition / Structure / Heat Treatment, HB, HRc, and MODEL. It lists various materials like Non-alloy steel, Low alloy steel, Stainless steel, Cast iron, Aluminum-cast alloys, Titanium Alloys, and Hardened steel.

Table with columns: HOLE TYPE, TOOL MATERIAL (CARBIDE), CHAMFER LEAD ACC. TO DIN2197, FLUTE TYPE (C, D), SPIRAL FLUTE ANGLE, and SURFACE TREATMENT (TiCN).

Table with columns: HOLE TYPE (Max. 2.5xD Blind Hole, Max. 3.0xD Through Hole), TOOL MATERIAL (HSS-E), FLUTE TYPE (C, B), SPIRAL FLUTE ANGLE, and SURFACE TREATMENT (Bright, VAP, TiAlN).


Large table with columns for material groups (P, M, K, N, S, H) and rows for different hole types and materials, including application icons like forming, general, and pipe tapping.

M ISO metric coarse threads DIN 13

- Metrisches ISO-Gewinde DIN 13
- ISO MÉTRIQUE DIN13
- ISO Metrico passo grosso DIN 13

▶ Carbide tap can increase tool life longer than HSS taps due to higher hardness. Suitable for hardened steels (HRc50~60)

▶ VHM-Gewindebohrer ermöglichen aufgrund ihrer höheren Härte bessere Standzeiten als HSS-Gewindebohrer. Geeignet für gehärtete Stähle (HRc50~60)

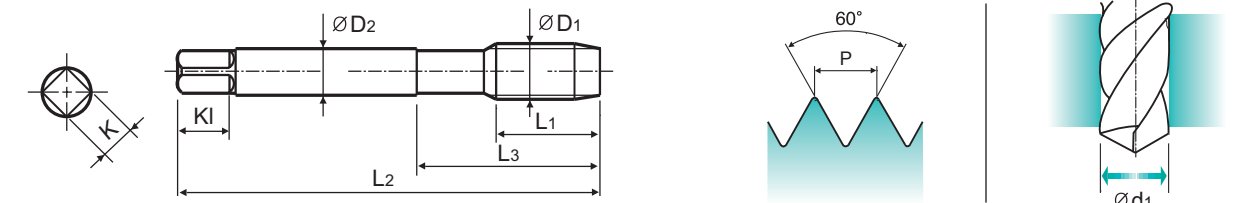

Material groups: **HR** CARBIDE DIN 371/376 6HX 60° C TICN p.B217

Recommended ToolHolder: Plain Shank TAPPING ER CHUCK TAPPING CHUCK ONE STEP TAPPING CHUCK

Unit : mm

SIZE	Pitch	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD1	P	TiCN	L1	L2	L3	ØD2	K	Kl	Z	Ød1
M3	× 0.5	T0997206TIC	11	56	18	3.5	2.7	6	4	2.55
M4	× 0.7	T0997246TIC	13	63	21	4.5	3.4	6	4	3.4
M5	× 0.8	T0997286TIC	15	70	25	6	4.9	8	4	4.3
M6	× 1.0	T0997316TIC	17	80	30	6	4.9	8	5	5.1
M8	× 1.25	T0997366TIC	20	90	35	8	6.2	9	5	6.9
M10	× 1.5	T0997426TIC	22	100	39	10	8	11	5	8.6
M12	× 1.75	T0997506TIC	24	110	-	9	7	12	5	10.4
M14	× 2.0	T0997546TIC	26	110	-	11	9	12	6	12.2
M16	× 2.0	T0997606TIC	27	110	-	12	9	12	6	14.2
M18	× 2.5	T0997656TIC	30	125	-	14	11	14	6	15.7
M20	× 2.5	T0997706TIC	32	140	-	16	12	15	6	17.7

▶ DIN 371(M3~M10) and DIN 376(M12~M20)

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended																				


ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended																					

M ISO metric coarse threads DIN 13

- Metrisches ISO-Gewinde DIN 13
- ISO MÉTRIQUE DIN13
- ISO Metrico passo grosso DIN 13

▶ Carbide tap can increase tool life longer than HSS taps due to higher hardness. Suitable for hardened steels (HRc50~60)

▶ VHM-Gewindebohrer ermöglichen aufgrund ihrer höheren Härte bessere Standzeiten als HSS-Gewindebohrer. Geeignet für gehärtete Stähle (HRc50~60)

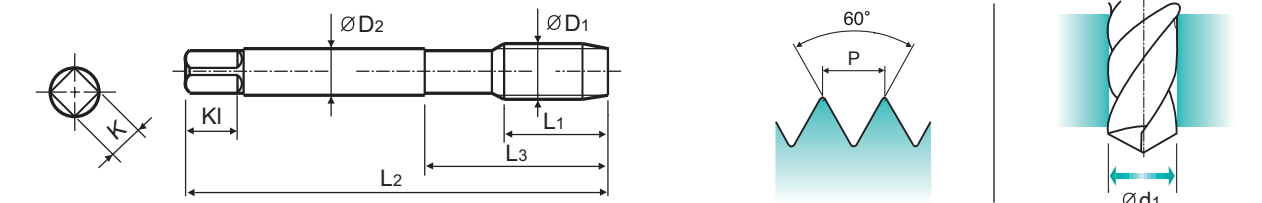

Material groups: **HR** CARBIDE DIN 371/376 6HX 60° D TICN p.B217

Recommended ToolHolder: Plain Shank TAPPING ER CHUCK TAPPING CHUCK ONE STEP TAPPING CHUCK

Unit : mm

SIZE	Pitch	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD1	P	TiCN	L1	L2	L3	ØD2	K	Kl	Z	Ød1
M3	× 0.5	T0999206TIC	11	56	18	3.5	2.7	6	4	2.55
M4	× 0.7	T0999246TIC	13	63	21	4.5	3.4	6	4	3.4
M5	× 0.8	T0999286TIC	15	70	25	6	4.9	8	4	4.3
M6	× 1.0	T0999316TIC	17	80	30	6	4.9	8	5	5.1
M8	× 1.25	T0999366TIC	20	90	35	8	6.2	9	5	6.9
M10	× 1.5	T0999426TIC	22	100	39	10	8	11	5	8.6
M12	× 1.75	T0999506TIC	24	110	-	9	7	12	5	10.4
M14	× 2.0	T0999546TIC	26	110	-	11	9	12	6	12.2
M16	× 2.0	T0999606TIC	27	110	-	12	9	12	6	14.2
M18	× 2.5	T0999656TIC	30	125	-	14	11	14	6	15.7
M20	× 2.5	T0999706TIC	32	140	-	16	12	15	6	17.7

▶ DIN 371(M3~M10) and DIN 376(M12~M20)

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended																				

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended																					

YG TAP HARDENED

TC313 SERIES





M ISO metric coarse threads DIN 13

- Metrisches ISO-Gewinde DIN 13
- ISO MÉTRIQUE DIN13
- ISO Metrico passo grosso DIN 13

Machine taps
Maschinengewindebohrer

► Suitable for tapping blind holes due to special flute geometry and excellent chip evacuation.

► Geeignet zum Gewinden von Sacklöchern dank besonderer Nutengeometrie und ausgezeichneter Spanabfuhr.

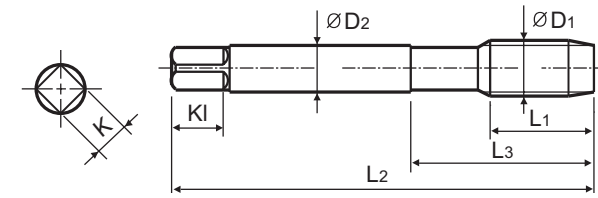

Material groups: **HR** HSS-E DIN 371/376 6H 60° C R40 Bright p.B217

Unit : mm

SIZE	Pitch	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD1	P	Bright	L1	L2	L3	ØD2	K	KI	Z	Ød1
M2	× 0.4	TC313136	8	45	13	2.8	2.1	5	3	1.6
M2.2	× 0.45	TC313156	8	45	13	2.8	2.1	5	3	1.75
*M2.3	× 0.4	TC313196	8	45	13	2.8	2.1	5	3	1.9
M2.5	× 0.45	TC313176	9	50	15	2.8	2.1	5	3	2.05
*M2.6	× 0.45	TC313496	9	50	15	2.8	2.1	5	3	2.1
M3	× 0.5	TC313206	6	56	18	3.5	2.7	6	3	2.5
M3.5	× 0.6	TC313226	7	56	20	4	3	6	3	2.9
M4	× 0.7	TC313246	7	63	21	4.5	3.4	6	3	3.3
M4.5	× 0.75	TC313266	8	70	25	6	4.9	8	3	3.7
M5	× 0.8	TC313286	8	70	25	6	4.9	8	3	4.2
M6	× 1.0	TC313316	10	80	30	6	4.9	8	3	5
M7	× 1.0	TC313346	10	80	30	7	5.5	8	3	6
M8	× 1.25	TC313366	13	90	35	8	6.2	9	3	6.8
M9	× 1.25	TC313396	13	90	35	9	7	10	3	7.8
M10	× 1.5	TC313426	15	100	39	10	8	11	3	8.5
M11	× 1.5	TC313466	17	100	40	8	6.2	9	3	9.5
M12	× 1.75	TC313506	18	110	44	9	7	10	3	10.2
M14	× 2.0	TC313546	20	110	44	11	9	12	3	12
M16	× 2.0	TC313606	20	110	44	12	9	12	3	14
M18	× 2.5	TC313656	25	125	50	14	11	14	4	15.5
M20	× 2.5	TC313706	25	140	54	16	12	15	4	17.5
M22	× 2.5	TC313746	25	140	54	18	14.5	17	4	19.5
M24	× 3.0	TC313786	30	160	60	18	14.5	17	4	21
M27	× 3.0	TC313866	30	160	60	20	16	19	4	24
M30	× 3.5	TC313946	35	180	70	22	18	21	4	26.5

► DIN 371 (M2~M10) and DIN 376 (M11~M30)
► * DIN profile not ISO

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Hrc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	13	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended						○	○		◎				○							

ISO	N						S					H									
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron					
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
Hrc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			15	30	25	38	34	400Rm	1050Rm	550	630	400	550
Recommended						○															

YG TAP HARDENED

TB313 SERIES





M ISO metric coarse threads DIN 13

- Metrisches ISO-Gewinde DIN 13
- ISO MÉTRIQUE DIN13
- ISO Metrico passo grosso DIN 13

Machine taps
Maschinengewindebohrer

► Suitable for tapping blind holes due to special flute geometry and excellent chip evacuation.

► Geeignet zum Gewinden von Sacklöchern dank besonderer Nutengeometrie und ausgezeichneter Spanabfuhr.

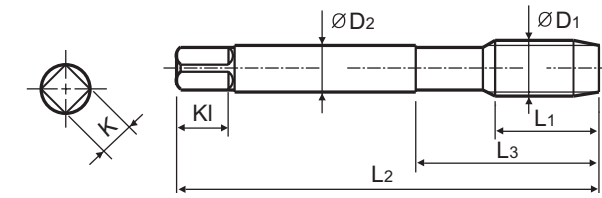

Material groups: **HR** HSS-E DIN 371/376 6H 60° C R40 Vap p.B217

Unit : mm

SIZE	Pitch	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD1	P	Vap	L1	L2	L3	ØD2	K	KI	Z	Ød1
M2	× 0.4	TB313136	8	45	13	2.8	2.1	5	3	1.6
M2.2	× 0.45	TB313156	8	45	13	2.8	2.1	5	3	1.75
*M2.3	× 0.4	TB313196	8	45	13	2.8	2.1	5	3	1.9
M2.5	× 0.45	TB313176	9	50	15	2.8	2.1	5	3	2.05
*M2.6	× 0.45	TB313496	9	50	15	2.8	2.1	5	3	2.1
M3	× 0.5	TB313206	6	56	18	3.5	2.7	6	3	2.5
M3.5	× 0.6	TB313226	7	56	20	4	3	6	3	2.9
M4	× 0.7	TB313246	7	63	21	4.5	3.4	6	3	3.3
M4.5	× 0.75	TB313266	8	70	25	6	4.9	8	3	3.7
M5	× 0.8	TB313286	8	70	25	6	4.9	8	3	4.2
M6	× 1.0	TB313316	10	80	30	6	4.9	8	3	5
M7	× 1.0	TB313346	10	80	30	7	5.5	8	3	6
M8	× 1.25	TB313366	13	90	35	8	6.2	9	3	6.8
M9	× 1.25	TB313396	13	90	35	9	7	10	3	7.8
M10	× 1.5	TB313426	15	100	39	10	8	11	3	8.5
M11	× 1.5	TB313466	17	100	40	8	6.2	9	3	9.5
M12	× 1.75	TB313506	18	110	44	9	7	10	3	10.2
M14	× 2.0	TB313546	20	110	44	11	9	12	3	12
M16	× 2.0	TB313606	20	110	44	12	9	12	3	14
M18	× 2.5	TB313656	25	125	50	14	11	14	4	15.5
M20	× 2.5	TB313706	25	140	54	16	12	15	4	17.5
M22	× 2.5	TB313746	25	140	54	18	14.5	17	4	19.5
M24	× 3.0	TB313786	30	160	60	18	14.5	17	4	21
M27	× 3.0	TB313866	30	160	60	20	16	19	4	24
M30	× 3.5	TB313946	35	180	70	22	18	21	4	26.5

► DIN 371 (M2~M10) and DIN 376 (M11~M30)
► * DIN profile not ISO

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Hrc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	13	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended						○	○		◎				○							

ISO	N						S					H									
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron					
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
Hrc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			15	30	25	38	34	400Rm	1050Rm	550	630	400	550
Recommended						○															





M ISO metric coarse threads DIN 13

- Metrisches ISO-Gewinde DIN 13
- ISO MÉTRIQUE DIN13
- ISO Metrico passo grosso DIN 13

Machine taps
Maschinengewindebohrer

► Suitable for tapping blind holes due to special flute geometry and excellent chip evacuation.

► Geeignet zum Gewinden von Sacklöchern dank besonderer Nutengeometrie und ausgezeichneter Spanabfuhr.

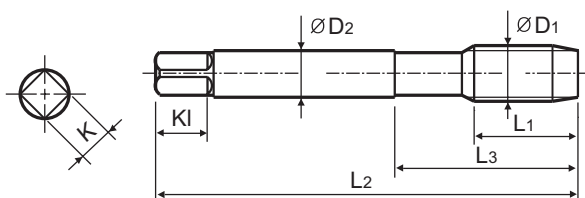

Material groups: **HR** HSS-E DIN 371/376 6H 60° C R40 TiAlN p.B217

Recommended ToolHolder: Plain Shank TAPPING ER CHUCK ONE STEP TAPPING CHUCK

SIZE	Pitch	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD1	P	TiAlN	L1	L2	L3	ØD2	K	Kl	Z	Ød1
M2 × 0.4		TY313136	8	45	13	2.8	2.1	5	3	1.6
M2.2 × 0.45		TY313156	8	45	13	2.8	2.1	5	3	1.75
*M2.3 × 0.4		TY313196	8	45	13	2.8	2.1	5	3	1.9
M2.5 × 0.45		TY313176	9	50	15	2.8	2.1	5	3	2.05
*M2.6 × 0.45		TY313496	9	50	15	2.8	2.1	5	3	2.1
M3 × 0.5		TY313206	6	56	18	3.5	2.7	6	3	2.5
M3.5 × 0.6		TY313226	7	56	20	4	3	6	3	2.9
M4 × 0.7		TY313246	7	63	21	4.5	3.4	6	3	3.3
M4.5 × 0.75		TY313266	8	70	25	6	4.9	8	3	3.7
M5 × 0.8		TY313286	8	70	25	6	4.9	8	3	4.2
M6 × 1.0		TY313316	10	80	30	6	4.9	8	3	5
M7 × 1.0		TY313346	10	80	30	7	5.5	8	3	6
M8 × 1.25		TY313366	13	90	35	8	6.2	9	3	6.8
M9 × 1.25		TY313396	13	90	35	9	7	10	3	7.8
M10 × 1.5		TY313426	15	100	39	10	8	11	3	8.5
M11 × 1.5		TY313466	17	100	40	8	6.2	9	3	9.5
M12 × 1.75		TY313506	18	110	44	9	7	10	3	10.2
M14 × 2.0		TY313546	20	110	44	11	9	12	3	12
M16 × 2.0		TY313606	20	110	44	12	9	12	3	14
M18 × 2.5		TY313656	25	125	50	14	11	14	4	15.5
M20 × 2.5		TY313706	25	140	54	16	12	15	4	17.5
M22 × 2.5		TY313746	25	140	54	18	14.5	17	4	19.5
M24 × 3.0		TY313786	30	160	60	18	14.5	17	4	21
M27 × 3.0		TY313866	30	160	60	20	16	19	4	24
M30 × 3.5		TY313946	35	180	70	22	18	21	4	26.5

► DIN 371(M2~M10) and DIN 376(M11~M30)

► * DIN profile not ISO

◎ : Excellent ○ : Good

ISO	P										M						K							
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20				
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21					
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230				
Recommended							○	○	◎					○										

ISO	N						S						H										
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel		Chilled Cast Iron		Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRc											15	30	25	38	34	55	60	42	42	55	21		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550		
Recommended							○																





M ISO metric coarse threads DIN 13

- Metrisches ISO-Gewinde DIN 13
- ISO MÉTRIQUE DIN13
- ISO Metrico passo grosso DIN 13

Machine taps
Maschinengewindebohrer

► Suitable for through hole in more cutting speed than other taps due to thick web.

► Geeignet für Durchgangslöcher in höherer Schnittgeschwindigkeit als bei anderen Gewindebohrern dank größerer Kerndicke.

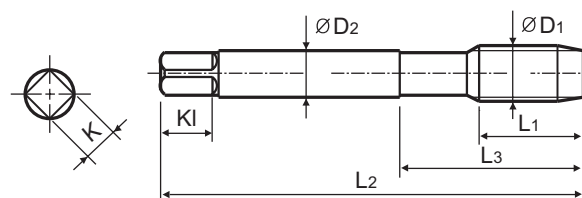

Material groups: **HR** HSS-E DIN 371/376 6H 60° B Bright p.B217

Recommended ToolHolder: Plain Shank TAPPING ER CHUCK ONE STEP TAPPING CHUCK

SIZE	Pitch	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD1	P	Bright	L1	L2	L3	ØD2	K	Kl	Z	Ød1
M2 × 0.4		TC283136	8	45	13	2.8	2.1	5	3	1.6
M2.2 × 0.45		TC283156	8	45	13	2.8	2.1	5	3	1.75
*M2.3 × 0.4		TC283196	8	45	13	2.8	2.1	5	3	1.9
M2.5 × 0.45		TC283176	9	50	15	2.8	2.1	5	3	2.05
*M2.6 × 0.45		TC283496	9	50	15	2.8	2.1	5	3	2.1
M3 × 0.5		TC283206	11	56	18	3.5	2.7	6	3	2.5
M3.5 × 0.6		TC283226	12	56	20	4	3	6	3	2.9
M4 × 0.7		TC283246	13	63	21	4.5	3.4	6	3	3.3
M4.5 × 0.75		TC283266	14	70	25	6	4.9	8	3	3.7
M5 × 0.8		TC283286	15	70	25	6	4.9	8	3	4.2
M6 × 1.0		TC283316	17	80	30	6	4.9	8	3	5
M7 × 1.0		TC283346	17	80	30	7	5.5	8	3	6
M8 × 1.25		TC283366	20	90	35	8	6.2	9	3	6.8
M9 × 1.25		TC283396	20	90	35	9	7	10	3	7.8
M10 × 1.5		TC283426	22	100	39	10	8	11	3	8.5
M11 × 1.5		TC283466	22	100	40	8	6.2	9	3	9.5
M12 × 1.75		TC283506	24	110	44	9	7	10	3	10.2
M14 × 2.0		TC283546	26	110	44	11	9	12	3	12
M16 × 2.0		TC283606	27	110	44	12	9	12	3	14
M18 × 2.5		TC283656	30	125	50	14	11	14	4	15.5
M20 × 2.5		TC283706	32	140	54	16	12	15	4	17.5
M22 × 2.5		TC283746	32	140	54	18	14.5	17	4	19.5
M24 × 3.0		TC283786	34	160	60	18	14.5	17	4	21
M27 × 3.0		TC283866	36	160	60	20	16	19	4	24
M30 × 3.5		TC283946	40	180	70	22	18	21	4	26.5

► DIN 371(M2~M10) and DIN 376(M11~M30)

► * DIN profile not ISO

◎ : Excellent ○ : Good

ISO	P										M						K							
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20				
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21					
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230				
Recommended							○	○	◎					○										

ISO	N						S						H										
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel		Chilled Cast Iron		Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRc											15	30	25	38	34	55	60	42	42	55	21		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550		
Recommended							○																



TY283 SERIES




M ISO metric coarse threads DIN 13

- Metrisches ISO-Gewinde DIN 13
- ISO MÉTRIQUE DIN13
- ISO Metrico passo grosso DIN 13

Machine taps
Maschinengewindebohrer

► Suitable for through hole in more cutting speed than other taps due to thick web.

► Geeignet für Durchgangslöcher in höherer Schnittgeschwindigkeit als bei anderen Gewindebohrern dank größerer Kerndicke.

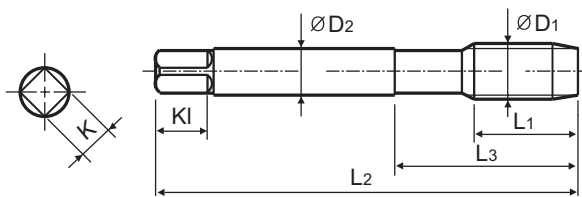

Material groups: **HR** HSS-E DIN 371/376 6H 60° B TiAlN p.B217

Recommended ToolHolder: Plain Shank TAPPING ER CHUCK, TAPPING CHUCK, ONE STEP TAPPING CHUCK

Unit : mm

SIZE	Pitch	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD1	P	TiAlN	L1	L2	L3	ØD2	K	KI	Z	Ød1
M2	× 0.4	TY283136	8	45	13	2.8	2.1	5	3	1.6
M2.2	× 0.45	TY283156	8	45	13	2.8	2.1	5	3	1.75
*M2.3	× 0.4	TY283196	8	45	13	2.8	2.1	5	3	1.9
M2.5	× 0.45	TY283176	9	50	15	2.8	2.1	5	3	2.05
*M2.6	× 0.45	TY283496	9	50	15	2.8	2.1	5	3	2.1
M3	× 0.5	TY283206	11	56	18	3.5	2.7	6	3	2.5
M3.5	× 0.6	TY283226	12	56	20	4	3	6	3	2.9
M4	× 0.7	TY283246	13	63	21	4.5	3.4	6	3	3.3
M4.5	× 0.75	TY283266	14	70	25	6	4.9	8	3	3.7
M5	× 0.8	TY283286	15	70	25	6	4.9	8	3	4.2
M6	× 1.0	TY283316	17	80	30	6	4.9	8	3	5
M7	× 1.0	TY283346	17	80	30	7	5.5	8	3	6
M8	× 1.25	TY283366	20	90	35	8	6.2	9	3	6.8
M9	× 1.25	TY283396	20	90	35	9	7	10	3	7.8
M10	× 1.5	TY283426	22	100	39	10	8	11	3	8.5
M11	× 1.5	TY283466	22	100	40	8	6.2	9	3	9.5
M12	× 1.75	TY283506	24	110	44	9	7	10	3	10.2
M14	× 2.0	TY283546	26	110	44	11	9	12	3	12
M16	× 2.0	TY283606	27	110	44	12	9	12	3	14
M18	× 2.5	TY283656	30	125	50	14	11	14	4	15.5
M20	× 2.5	TY283706	32	140	54	16	12	15	4	17.5
M22	× 2.5	TY283746	32	140	54	18	14.5	17	4	19.5
M24	× 3.0	TY283786	34	160	60	18	14.5	17	4	21
M27	× 3.0	TY283866	36	160	60	20	16	19	4	24
M30	× 3.5	TY283946	40	180	70	22	18	21	4	26.5

► DIN 371 (M2~M10) and DIN 376 (M11~M30)

► * DIN profile not ISO

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended						○	○	◎					○							

ISO	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	15	30	25	38	34						15	30	25	38	34	400Rm	1050Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended						○															




RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDKONDITIONEN

ISO	VDI 3323	Material Description	HB	HRc	Vc (m/min.)			
					T0997-TIC	T0999-TIC	TC313 TB313 TY313	TC283 TY283
P	7	Non-alloy steel	275	29			10-15	10-15
	8		300	32			6-10	6-10
	9		350	38	5-8	5-8	3-5	3-5
M	14	Stainless steel	180	10			4-6	4-6
N	26	Copper and Copper Alloys (Bronze / Brass)	110				25-35	25-35
H	38	Hardened steel	550	55	3-7	3-7		
			630	60	3-7	3-7		
			400	42	3-7	3-7		
			550	55	3-7	3-7		



Global Cutting Tool Leader **YG-1**

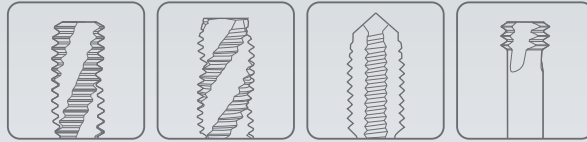

THREADING