




Global Cutting Tool Leader **YG-1**



HOLEMAKING

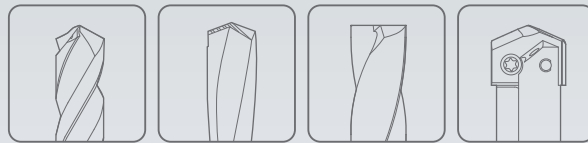

Leading Through Innovation



INSERTS & HOLDERS

SPADE DRILLS

BOHRMESSER

- For General Machines and Drilling Large Diameters, Longer Tool Life and High Productivity
- Für allgemeine Maschinen und zum Bohren großer Durchmesser, längere Werkzeugstandzeiten und höhere Produktivität

SELECTION GUIDE



Please visit globalyg1.com/mat for material search

INSERTS & HOLDERS SPADE DRILLS

For General Machines and Drilling Large Diameters Longer Tool Life and High Productivity

Recommended cutting conditions : p.A375

Table with columns: ISO, VDI 3323, Material Description, Composition / Structure / Heat Treatment, HB, HRC, and performance indicators for series 1~8, Y,Z,0,1~4, Y,Z,0,1,2.

Table showing holder types: TAPER SHANK, FLANGED SHANK, STRAIGHT SHANK with corresponding images and series numbers (A352, A362, A369).

Large table showing performance indicators for various series (Y,Z,0,1,2 to Y,Z,0,1,2) across different materials and coatings.

Table comparing Coating (TiN, TiCN, TiAlN, Hardslick) and Characteristics (wear resistance, temperature, friction).


SPADE DRILL INSERTS - CARBIDE P40

- EINWEG BOHREINSATZ - VOLLHARTMETALL P40
- Plaquettes SPADE DRILL - Carbure P40
- CUSPIDI SPADE DRILL - MD P40



- ▶ For general use in carbon steels and alloy steels.
- ▶ Set up time can be reduced due to changing inserts easily on the machine.
- ▶ Any non-standard size available.

- ▶ Für allgemeine Anwendung in Kohlenstoffstählen und legierten Stählen
- ▶ Reduzierte Rüstzeiten, einfacher Einsatzwechsel auf der Maschine
- ▶ Jede Abmessung außerhalb des Kataloges lieferbar



Cutting conditions : p.A380




Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		CARBIDE P40		
					TiN	TiCN	TiAlN
3 Ø34.37 (1.353) to Ø47.80 (1.882)	1-13/32	35.72	1.4063	S1805126	S1810126	S1815126	
		36.00	1.4173	S1855360	S1860360	S1865360	
	1-7/16	36.51	1.4375	S1805128	S1810128	S1815128	
		37.00	1.4567	S1855370	S1860370	S1865370	
	1-15/32	37.31	1.4688	S1805130	S1810130	S1815130	
		38.00	1.4961	S1855380	S1860380	S1865380	
	1-1/2	38.10	1.5000	S1805132	S1810132	S1815132	
		38.89	1.5313	S1805134	S1810134	S1815134	
	1-17/32	39.00	1.5354	S1855390	S1860390	S1865390	
		39.69	1.5625	S1805136	S1810136	S1815136	
	1-9/16	40.00	1.5748	S1855400	S1860400	S1865400	
		40.48	1.5938	S1805138	S1810138	S1815138	
	1-19/32	41.00	1.6142	S1855410	S1860410	S1865410	
		41.28	1.6250	S1805140	S1810140	S1815140	
	1-5/8	42.00	1.6535	S1855420	S1860420	S1865420	
		42.07	1.6563	S1805142	S1810142	S1815142	
	1-21/32	42.86	1.6875	S1805144	S1810144	S1815144	
		43.00	1.6929	S1855430	S1860430	S1865430	
	1-11/16	43.66	1.7188	S1805146	S1810146	S1815146	
		44.00	1.7323	S1855440	S1860440	S1865440	
1-23/32	44.45	1.7500	S1805148	S1810148	S1815148		
	45.00	1.7717	S1855450	S1860450	S1865450		
1-3/4	45.24	1.7813	S1805150	S1810150	S1815150		
	46.00	1.8110	S1855460	S1860460	S1865460		
1-13/16	46.04	1.8125	S1805152	S1810152	S1815152		
	46.83	1.8438	S1805154	S1810154	S1815154		
1-27/32	47.00	1.8504	S1855470	S1860470	S1865470		
	47.63	1.8750	S1805156	S1810156	S1815156		

This new "Hybrid Point" combines the strength of the standard point with additional "Web Thinning".

This new point increases stability, reduces thrust, improves centering and allows increased speeds and feeds.

Multiple thinning form at the bottom of the large thinning.


- ▶ The optimum thinning for the difference from the cutting speed, the cutting quantity and the cutting load according to the distance from the drill point to the cutting edge.

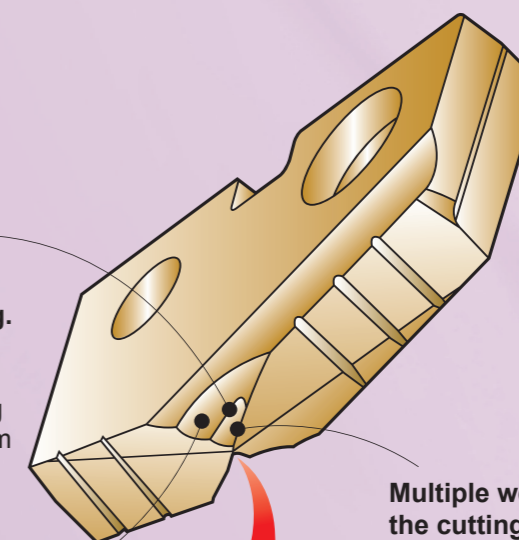

Multiple web thinning with the cutting edge of small web thinning.

- ▶ Good self-centering
- ▶ Less tool lead off
- ▶ Reduction in bell mouching, thrust
- ▶ Increased stability

Radius back face
▶ Wide chip space



Four-facet point

- ▶ Self-centering
- ▶ Less thrust force

© : Excellent ○ : Good

ISO Material Description	P									M				K						
	Non-alloy steel			Low alloy steel			High alloyed steel, and tool steel			Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○

ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○									○	○	○	○	○			◎			

HSS

HSS

i-ONE DRILLS

i-ONE DRILLS

i-DREAM DRILLS

i-DREAM DRILLS

DREAM DRILLS -PRO

DREAM DRILLS -PRO

DREAM DRILLS -GENERAL

DREAM DRILLS -GENERAL

DREAM DRILLS -HIGH FEED

DREAM DRILLS -HIGH FEED

DREAM DRILLS -FLAT BOTTOM

DREAM DRILLS -FLAT BOTTOM

DREAM DRILLS -INOX

DREAM DRILLS -INOX

DREAM DRILLS -ALU

DREAM DRILLS -ALU

DREAM DRILLS -MQL

DREAM DRILLS -MQL

DREAM DRILLS for HIGH HARDENED STEELS

DREAM DRILLS for HIGH HARDENED STEELS

GENERAL CARBIDE DRILLS

GENERAL CARBIDE DRILLS

MULTI-1 DRILLS

MULTI-1 DRILLS

HPD DRILLS

HPD DRILLS

GOLD-P DRILLS

GOLD-P DRILLS

SUPER-GP DRILLS

SUPER-GP DRILLS

STRAIGHT SHANK DRILLS

STRAIGHT SHANK DRILLS

TAPER SHANK DRILLS

TAPER SHANK DRILLS

NC-SPOTTING DRILLS

NC-SPOTTING DRILLS

CENTER DRILLS

CENTER DRILLS

SPADE DRILLS

SPADE DRILLS

REAMERS

REAMERS

COUNTER SINKS

COUNTER SINKS

COUNTER BORES

COUNTER BORES

TECHNICAL DATA

TECHNICAL DATA

YG SPADE DRILLS

SERIES Y, Z, 0

YG SPADE DRILLS


SERIES 0, 1

SM-POINT SPADE DRILL INSERTS for CAST IRON - CARBIDE K10

SM-POINT EINWEG BOHREINSATZ - VOLLHARTMETALL K10
Plaquettes SPADE DRILL, pointe SM pour la fonte - Carbure K10
CUSPIDI SM-POINT - MD K10



- High performance on Gray cast iron over 220 Brinell, malleable cast iron with short chips, silicon aluminum and copper alloys.
Improved stability and hole straightness by newly developed thinning design.
Less thrust force and excellent self-centering.
Any non-standard size available.
Beste Leistung in Grauguss über 220 Brinell, kurzspanendem Kugelgraphitguss, Si-Aluminium und Kupferlegierungen
Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Querschnittsgeometrie
Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : p.A378

Flat Shank
Recommended ToolHolder
INDEXABLE DRILL HOLDER
ER COLLET CHUCK

Table with columns for Series (Y, Z, 0), Diameter (Inch, Metric, Decimal), Thick (Metric), EDP No. (TiN, TiCN, TiAlN) for Carbide K10.

⊙: Excellent ○: Good


ISO Material Recommendation table for various materials including Non-alloy steel, Low alloy steel, High alloyed steel, Stainless steel, Titanium Alloys, and Hardened/Chilled Cast Iron.

SM-POINT SPADE DRILL INSERTS for CAST IRON - CARBIDE K10

SM-POINT EINWEG BOHREINSATZ - VOLLHARTMETALL K10
Plaquettes SPADE DRILL, pointe SM pour la fonte - Carbure K10
CUSPIDI SM-POINT - MD K10



- High performance on Gray cast iron over 220 Brinell, malleable cast iron with short chips, silicon aluminum and copper alloys.
Improved stability and hole straightness by newly developed thinning design.
Less thrust force and excellent self-centering.
Any non-standard size available.
Beste Leistung in Grauguss über 220 Brinell, kurzspanendem Kugelgraphitguss, Si-Aluminium und Kupferlegierungen
Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Querschnittsgeometrie
Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : p.A378

Flat Shank
Recommended ToolHolder
INDEXABLE DRILL HOLDER
ER COLLET CHUCK


Table with columns for Series (0, 1), Diameter (Inch, Metric, Decimal), Thick (Metric), EDP No. (TiN, TiCN, TiAlN) for Carbide K10.

⊙: Excellent ○: Good

ISO Material Recommendation table for various materials including Non-alloy steel, Low alloy steel, High alloyed steel, Stainless steel, Titanium Alloys, and Hardened/Chilled Cast Iron.

TAPER SHANK HOLDERS

- HALTER MIT MORSEKEGEL
- Porte-plaquette à queue cône morse
- PUNTE CON ATTACCO CM

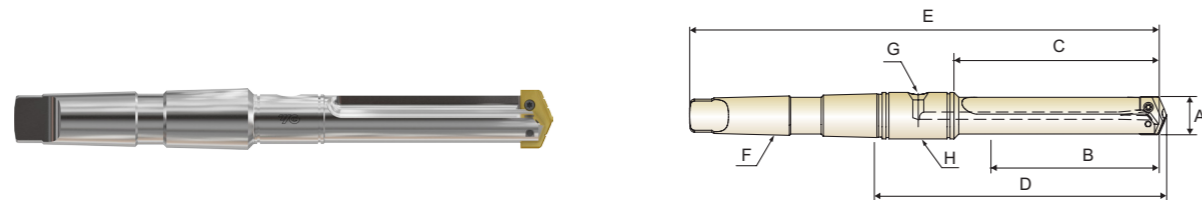


SHORT LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	MT	Pipe Tap	RCA
		A	B	C	D	E	F	G	H
Y	ZY0STSMT02I	3/8 ~ 27/64	1-1/4	2-1/32	3-15/32	6-5/16	#2	1/16	PR110048
Z	ZZ0STSMT02I	7/16 ~ 1/2	1-1/4	2-1/32	3-15/32	6-5/16	#2	1/16	PR110048
0	Z00STSMT02I	33/64 ~ 11/16	1-3/8	2-3/16	3-41/64	6-15/32	#2	1/16	PR110048
0.5	Z05STSMT02I	39/64 ~ 11/16	1-3/8	2-3/16	3-41/64	6-15/32	#2	1/16	PR110048
1	Z10STSMT03I	45/64 ~ 15/16	2-3/4	3-7/8	5-39/64	9-5/32	#3	1/8	PR110100
	Z10STSMT04I	45/64 ~ 15/16	2-3/4	3-7/8	5-43/64	10-5/32	#4	1/8	PR110100
1.5	Z15STSMT03I	55/64 ~ 15/16	2-3/4	3-7/8	5-39/64	9-5/32	#3	1/8	PR110100
	Z15STSMT04I	55/64 ~ 15/16	2-3/4	3-7/8	5-43/64	10-5/32	#4	1/8	PR110100
2	Z20STSMT03I	31/32 ~ 1-3/8	3-3/8	4-1/2	6-15/64	9-25/32	#3	1/8	PR110100
	Z20STSMT04I	31/32 ~ 1-3/8	3-3/8	4-1/2	6-19/64	10-25/32	#4	1/8	PR110100
2.5	Z25STSMT03I	1-3/16 ~ 1-3/8	3-3/8	4-1/2	6-15/64	9-25/32	#3	1/8	PR110100
	Z25STSMT04I	1-3/16 ~ 1-3/8	3-3/8	4-1/2	6-37/64	11-1/16	#4	1/4	PR110116
3	Z30STSMT04I	1-13/32 ~ 1-7/8	4-3/4	6	8-1/8	12-9/16	#4	1/4	PR110116
	Z30STSMT05I	1-13/32 ~ 1-7/8	4-3/4	6	8-1/8	13-13/16	#5	1/4	PR110148
4	Z40STSMT04I	1-29/32 ~ 2-9/16	5-1/8	6-1/2	8-5/8	13-1/16	#4	1/4	PR110116
	Z40STSMT05I	1-29/32 ~ 2-9/16	5-1/8	6-1/2	8-5/8	14-5/16	#5	1/4	PR110148
5	Z50STSMT05I	2-1/2 ~ 3-1/2	6-3/4	8-1/2	11-5/16	16-15/16	#5	1/2	PR110216
	Z70STSMT05I	3-17/32 ~ 4-1/2	6-3/4	8-7/8	11-11/16	17-5/16	#5	1/2	PR110216

► You can also apply RCA(Rotary Coolant Adapter) for internal cooling. (See page 374)

TAPER SHANK HOLDERS


- HALTER MIT MORSEKEGEL
- Porte-plaquette à queue cône morse
- PUNTE CON ATTACCO CM

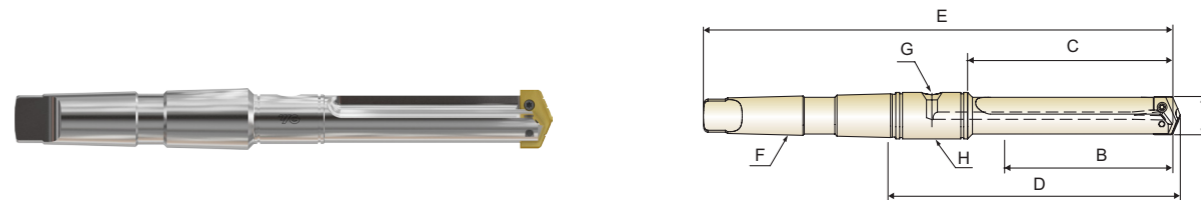

INTERMEDIATE LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	MT	Pipe Tap	RCA
		A	B	C	D	E	F	G	H
1	Z10ITSMT03I	45/64 ~ 15/16	4-3/4	5-7/8	7-39/64	11-5/32	#3	1/8	PR110100
1.5	Z15ITSMT03I	55/64 ~ 15/16	4-3/4	5-7/8	7-39/64	11-5/32	#3	1/8	PR110100
2	Z20ITSMT04I	31/32 ~ 1-3/8	5-3/8	6-1/2	8-19/64	12-25/32	#4	1/8	PR110100
2.5	Z25ITSMT04I	1-3/16 ~ 1-3/8	5-3/8	6-1/2	8-37/64	13-1/16	#4	1/4	PR110116
3	Z30ITSMT04I	1-13/32 ~ 1-7/8	6-1/2	7-3/4	9-7/8	14-5/16	#4	1/4	PR110116

► You can also apply RCA(Rotary Coolant Adapter) for internal cooling. (See page 374)

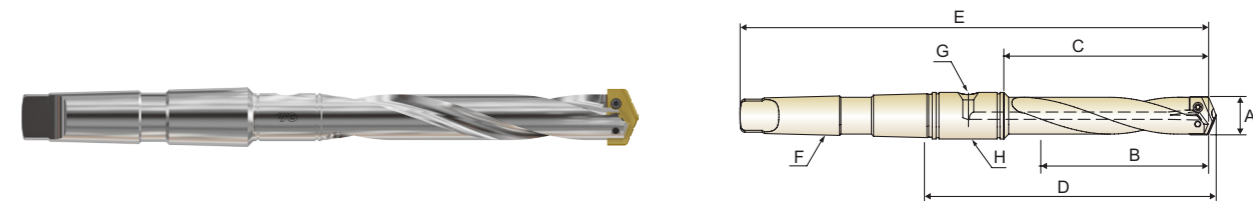


INTERMEDIATE LENGTH - Helical Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	MT	Pipe Tap	RCA
		A	B	C	D	E	F	G	H
1	Z10ITHMT03I	45/64 ~ 15/16	4-3/4	5-7/8	7-39/64	11-5/32	#3	1/8	PR110100
1.5	Z15ITHMT03I	55/64 ~ 15/16	4-3/4	5-7/8	7-39/64	11-5/32	#3	1/8	PR110100
2	Z20ITHMT04I	31/32 ~ 1-3/8	5-3/8	6-1/2	8-19/64	12-25/32	#4	1/8	PR110100
2.5	Z25ITHMT04I	1-3/16 ~ 1-3/8	5-3/8	6-1/2	8-37/64	13-1/16	#4	1/4	PR110116

► You can also apply RCA(Rotary Coolant Adapter) for internal cooling. (See page 374)

TAPER SHANK HOLDERS

- HALTER MIT MORSEKEGEL
- Porte-plaquette à queue cône morse
- PUNTE CON ATTACCO CM

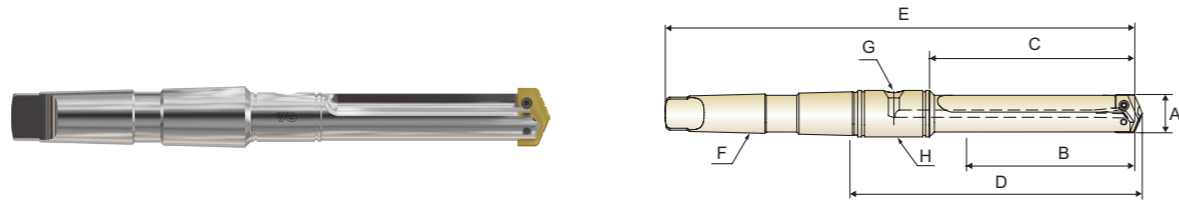


STANDARD LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	MT	Pipe Tap	RCA
		A	B	C	D	E			
Y	ZY0SDSMT02I	3/8 ~ 27/64	2-3/8	3-5/32	4-19/32	7-7/16	#2	1/16	PR110048
Z	ZZ0SDSMT02I	7/16 ~ 1/2	2-3/8	3-5/32	4-19/32	7-7/16	#2	1/16	PR110048
0	Z00SDSMT02I	33/64 ~ 11/16	2-1/2	3-5/16	4-49/64	7-19/32	#2	1/16	PR110048
0.5	Z05SDSMT02I	39/64 ~ 11/16	2-1/2	3-5/16	4-49/64	7-19/32	#2	1/16	PR110048
1	Z10SDSMT03I	45/64 ~ 15/16	6-3/4	7-7/8	9-39/64	13-5/32	#3	1/8	PR110100
	Z10SDSMT04I	45/64 ~ 15/16	6-3/4	7-7/8	9-43/64	14-5/32	#4	1/8	PR110100
1.5	Z15SDSMT03I	55/64 ~ 15/16	6-3/4	7-7/8	9-39/64	13-5/32	#3	1/8	PR110100
	Z15SDSMT04I	55/64 ~ 15/16	6-3/4	7-7/8	9-43/64	14-5/32	#4	1/8	PR110100
2	Z20SDSMT03I	31/32 ~ 1-3/8	7-3/8	8-1/2	10-15/64	13-25/32	#3	1/8	PR110100
	Z20SDSMT04I	31/32 ~ 1-3/8	7-3/8	8-1/2	10-19/64	14-25/32	#4	1/8	PR110100
2.5	Z25SDSMT03I	1-3/16 ~ 1-3/8	7-3/8	8-1/2	10-15/64	13-25/32	#3	1/8	PR110100
	Z25SDSMT04I	1-3/16 ~ 1-3/8	7-3/8	8-1/2	10-37/64	15-1/16	#4	1/4	PR110116
3	Z30SDSMT04I	1-13/32 ~ 1-7/8	8-1/4	9-1/2	11-5/8	16-1/16	#4	1/4	PR110116
	Z30SDSMT05I	1-13/32 ~ 1-7/8	8-1/4	9-1/2	11-5/8	17-5/16	#5	1/4	PR110148
4	Z40SDSMT04I	1-29/32 ~ 2-9/16	9-1/8	10-1/2	12-5/8	17-1/16	#4	1/4	PR110116
	Z40SDSMT05I	1-29/32 ~ 2-9/16	9-1/8	10-1/2	12-5/8	18-5/16	#5	1/4	PR110148
5~6	Z50SDSMT05I	2-1/2 ~ 3-1/2	10-3/4	12-1/2	15-5/16	20-15/16	#5	1/2	PR110216
7~8	Z70SDSMT05I	3-17/32 ~ 4-1/2	10-3/4	12-7/8	15-11/16	21-5/16	#5	1/2	PR110216

► You can also apply RCA(Rotary Coolant Adapter) for internal cooling. (See page 374)

TAPER SHANK HOLDERS

- HALTER MIT MORSEKEGEL
- Porte-plaquette à queue cône morse
- PUNTE CON ATTACCO CM

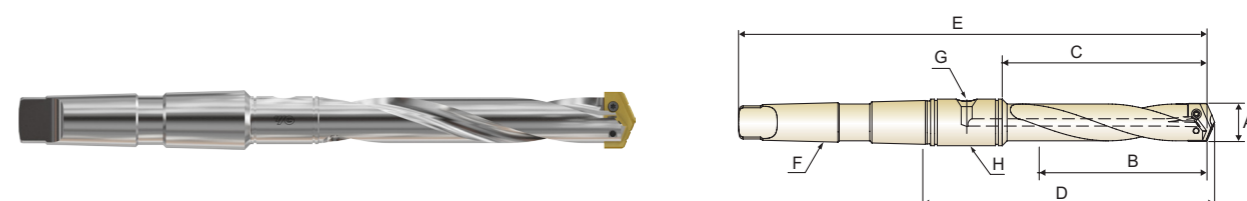


STANDARD LENGTH - Helical Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	MT	Pipe Tap	RCA
		A	B	C	D	E			
Y	ZY0SDHMT02I	3/8 ~ 27/64	2-3/8	3-5/32	4-19/32	7-7/16	#2	1/16	PR110048
Z	ZZ0SDHMT02I	7/16 ~ 1/2	2-3/8	3-5/32	4-19/32	7-7/16	#2	1/16	PR110048
0	Z00SDHMT02I	33/64 ~ 11/16	2-1/2	3-5/16	4-49/64	7-19/32	#2	1/16	PR110048
0.5	Z05SDHMT02I	39/64 ~ 11/16	2-1/2	3-5/16	4-49/64	7-19/32	#2	1/16	PR110048
1	Z10SDHMT03I	45/64 ~ 15/16	6-3/4	7-7/8	9-39/64	13-5/32	#3	1/8	PR110100
	Z10SDHMT04I	45/64 ~ 15/16	6-3/4	7-7/8	9-43/64	14-5/32	#4	1/8	PR110100
1.5	Z15SDHMT03I	55/64 ~ 15/16	6-3/4	7-7/8	9-39/64	13-5/32	#3	1/8	PR110100
	Z15SDHMT04I	55/64 ~ 15/16	6-3/4	7-7/8	9-43/64	14-5/32	#4	1/8	PR110100
2	Z20SDHMT03I	31/32 ~ 1-3/8	7-3/8	8-1/2	10-15/64	13-25/32	#3	1/8	PR110100
	Z20SDHMT04I	31/32 ~ 1-3/8	7-3/8	8-1/2	10-19/64	14-25/32	#4	1/8	PR110100
2.5	Z25SDHMT03I	1-3/16 ~ 1-3/8	7-3/8	8-1/2	10-15/64	13-25/32	#3	1/8	PR110100
	Z25SDHMT04I	1-3/16 ~ 1-3/8	7-3/8	8-1/2	10-37/64	15-1/16	#4	1/4	PR110116

► You can also apply RCA(Rotary Coolant Adapter) for internal cooling. (See page 374)

TAPER SHANK HOLDERS


- HALTER MIT MORSEKEGEL
- Porte-plaquette à queue cône morse
- PUNTE CON ATTACCO CM

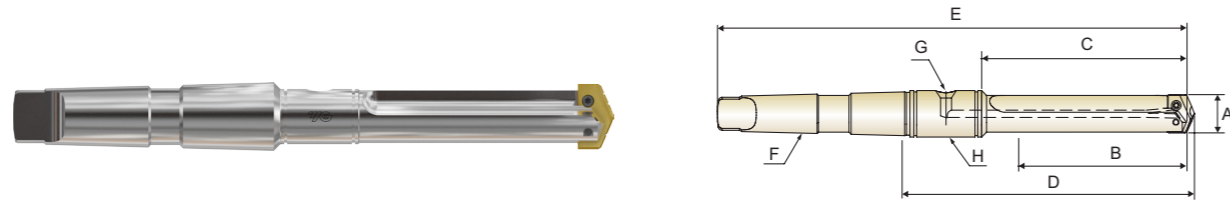

EXTENDED LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	MT	Pipe Tap	RCA
		A	B	C	D	E	F	G	H
Y	ZY0EXSMT02I	3/8 ~ 27/64	4-3/8	5-5/32	6-19/32	9-7/16	#2	1/16	PR110048
Z	ZZ0EXSMT02I	7/16 ~ 1/2	4-3/8	5-5/32	6-19/32	9-7/16	#2	1/16	PR110048
0	Z00EXSMT02I	33/64 ~ 11/16	4-1/2	5-5/16	6-49/64	9-19/32	#2	1/16	PR110048
0.5	Z05EXSMT02I	39/64 ~ 11/16	4-1/2	5-5/16	6-49/64	9-19/32	#2	1/16	PR110048
1	Z10EXSMT03I	45/64 ~ 15/16	10-3/4	11-7/8	13-39/64	17-5/32	#3	1/8	PR110100
1.5	Z15EXSMT03I	55/64 ~ 15/16	10-3/4	11-7/8	13-39/64	17-5/32	#3	1/8	PR110100
2	Z20EXSMT04I	31/32 ~ 1-3/8	11-3/8	12-1/2	14-15/64	18-25/32	#4	1/8	PR110100
2.5	Z25EXSMT04I	1-3/16 ~ 1-3/8	11-3/8	12-1/2	14-37/64	19-1/16	#4	1/4	PR110116
3	Z30EXSMT04I	1-13/32 ~ 1-7/8	13-3/4	15	17-1/8	21-9/16	#4	1/4	PR110116
4	Z40EXSMT05I	1-29/32 ~ 2-9/16	16-5/8	18	20-1/8	25-13/16	#5	1/4	PR110148
5~6	Z50EXSMT05I	2-1/2 ~ 3-1/2	18-1/4	20	22-13/16	28-7/16	#5	1/2	PR110216
7~8	Z70EXSMT05I	3-17/32 ~ 4-1/2	21-7/8	24	26-13/16	32-7/16	#5	1/2	PR110216

▶ You can also apply RCA(Rotary Coolant Adapter) for internal cooling. (See page 374)

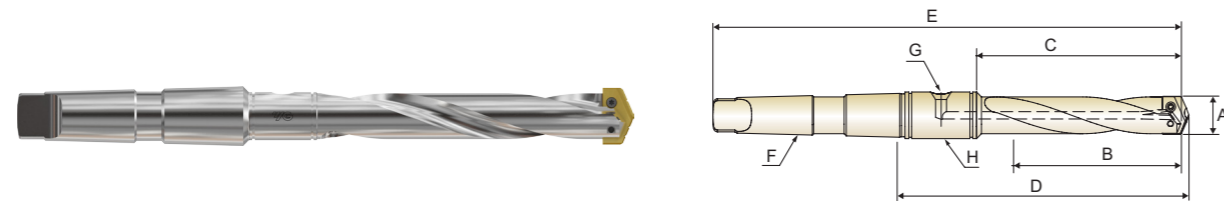


EXTENDED LENGTH - Helical Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	MT	Pipe Tap	RCA
		A	B	C	D	E	F	G	H
Y	ZY0EXHMT02I	3/8 ~ 27/64	4-3/8	5-5/32	6-19/32	9-7/16	#2	1/16	PR110048
Z	ZZ0EXHMT02I	7/16 ~ 1/2	4-3/8	5-5/32	6-19/32	9-7/16	#2	1/16	PR110048
0	Z00EXHMT02I	33/64 ~ 11/16	4-1/2	5-5/16	6-49/64	9-19/32	#2	1/16	PR110048
0.5	Z05EXHMT02I	39/64 ~ 11/16	4-1/2	5-5/16	6-49/64	9-19/32	#2	1/16	PR110048
1	Z10EXHMT03I	45/64 ~ 15/16	10-3/4	11-7/8	13-39/64	17-5/32	#3	1/8	PR110100
1.5	Z15EXHMT03I	55/64 ~ 15/16	10-3/4	11-7/8	13-39/64	17-5/32	#3	1/8	PR110100
2	Z20EXHMT04I	31/32 ~ 1-3/8	11-3/8	12-1/2	14-15/64	18-25/32	#4	1/8	PR110100
2.5	Z25EXHMT04I	1-3/16 ~ 1-3/8	11-3/8	12-1/2	14-37/64	19-1/16	#4	1/4	PR110116

▶ You can also apply RCA(Rotary Coolant Adapter) for internal cooling. (See page 324)

TAPER SHANK HOLDERS

- HALTER MIT MORSEKEGEL
- Porte-plaquette à queue cône morse
- PUNTE CON ATTACCO CM

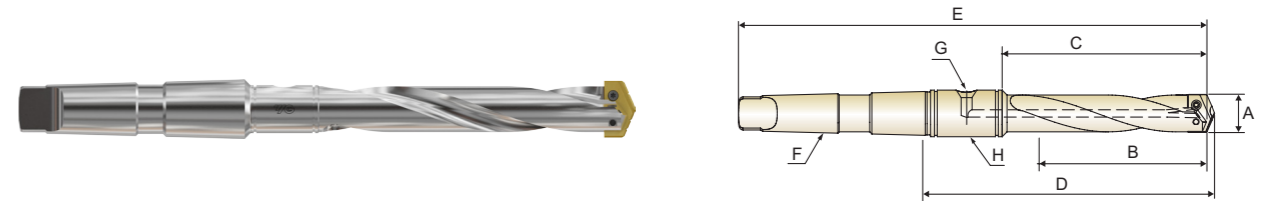


LONG LENGTH - Helical Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	MT	Pipe Tap	RCA
		A	B	C	D	E	F	G	H
0	Z00LGHMT02I	33/64 ~ 11/16	7	7-13/16	9-17/64	12-3/32	#2	1/16	PR110048
0.5	Z05LGHMT02I	39/64 ~ 11/16	7	7-13/16	9-17/64	12-3/32	#2	1/16	PR110048

▶ You can also apply RCA(Rotary Coolant Adapter) for internal cooling. (See page 374)

TAPER SHANK HOLDERS


- HALTER MIT MORSEKEGEL
- Porte-plaquette à queue cône morse
- PUNTE CON ATTACCO CM

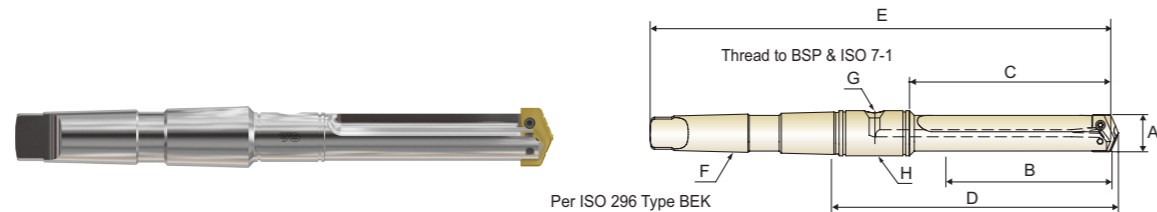

SHORT LENGTH - Straight Flute (Metric)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	MT	Pipe Tap	RCA
		A	B	C	D	E	F	G	H
Y	ZY0STSMT02M	9.5 ~ 11.0	31.8	51.5	88.0	160.3	#2	1/16	PR120190
Z	ZZ0STSMT02M	11.5 ~ 12.5	31.8	51.5	88.0	160.3	#2	1/16	PR120190
0	Z00STSMT02M	13.0 ~ 17.5	35.0	55.5	92.4	164.3	#2	1/16	PR120190
0.5	Z05STSMT02M	15.5 ~ 17.5	35.0	55.5	92.4	164.3	#2	1/16	PR120190
1	Z10STSMT03M	18.0 ~ 24.0	69.8	98.4	142.5	232.5	#3	1/8	PR120254
1.5	Z15STSMT03M	22.0 ~ 24.0	69.8	98.4	142.5	232.5	#3	1/8	PR120254
2	Z20STSMT04M	25.0 ~ 35.0	85.7	114.3	160.4	273.8	#4	1/8	PR120254
2.5	Z25STSMT04M	30.0 ~ 35.0	85.7	114.3	167.6	281.0	#4	1/4	PR120317
3	Z30STSMT04M	36.0 ~ 47.0	120.6	152.4	206.4	319.1	#4	1/4	PR120317
4	Z40STSMT05M	48.0 ~ 65.0	130.1	165.1	219.1	363.5	#5	1/4	PR120444
5~6	Z50STSMT05M	64.0 ~ 88.0	171.5	215.9	287.3	430.2	#5	1/2	PR120571
7~8	Z70STSMT05M	90.0 ~ 114.0	171.5	225.4	296.8	439.7	#5	1/2	PR120571

▶ You can also apply RCA(Rotary Coolant Adapter) for internal cooling. (See page 374)

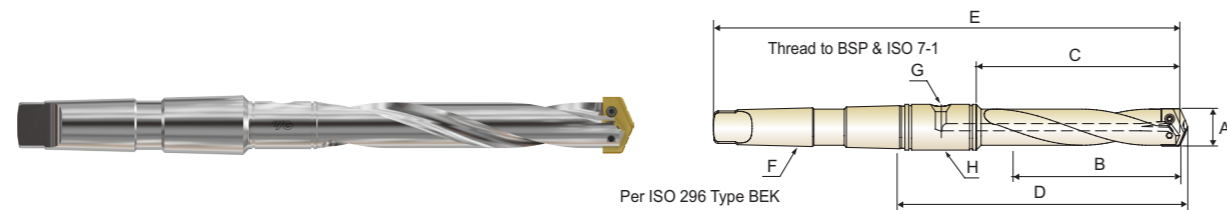


INTERMEDIATE LENGTH - Helical Flute (Metric)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	MT	Pipe Tap	RCA
		A	B	C	D	E	F	G	H
1	Z10ITHMT03M	18.0 ~ 24.0	120.7	149.2	193.3	283.3	#3	1/8	PR120254
1.5	Z15ITHMT03M	22.0 ~ 24.0	120.7	149.2	193.3	283.3	#3	1/8	PR120254
2	Z20ITHMT04M	25.0 ~ 35.0	136.5	165.1	211.2	324.6	#4	1/8	PR120254
2.5	Z25ITHMT04M	30.0 ~ 35.0	136.5	165.1	218.4	331.8	#4	1/4	PR120317
3	Z30ITHMT04M	36.0 ~ 47.0	165.1	196.9	250.9	363.6	#4	1/4	PR120317

▶ You can also apply RCA(Rotary Coolant Adapter) for internal cooling. (See page 374)

TAPER SHANK HOLDERS

- HALTER MIT MORSEKEGEL
- Porte-plaquette à queue cône morse
- PUNTE CON ATTACCO CM

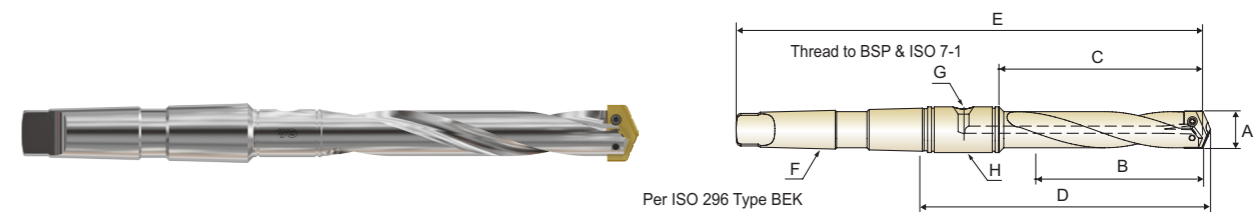


STANDARD LENGTH - Straight Flute (Metric)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	MT	Pipe Tap	RCA
		A	B	C	D	E	F	G	H
Y	ZY0SDHMT02M	9.5 ~ 11.0	60.3	80.2	116.7	188.9	#2	1/16	PR120190
Z	ZZ0SDHMT02M	11.5 ~ 12.5	60.3	80.2	116.7	188.9	#2	1/16	PR120190
0	Z00SDHMT02M	13.0 ~ 17.5	63.5	84.1	121.0	192.9	#2	1/16	PR120190
0.5	Z05SDHMT02M	15.5 ~ 17.5	63.5	84.1	121.0	192.9	#2	1/16	PR120190
1	Z10SDHMT03M	18.0 ~ 24.0	171.5	200.0	244.1	334.2	#3	1/8	PR120254
1.5	Z15SDHMT03M	22.0 ~ 24.0	171.5	200.0	244.1	334.2	#3	1/8	PR120254
2	Z20SDHMT04M	25.0 ~ 35.0	187.3	215.9	262.0	375.4	#4	1/8	PR120254
2.5	Z25SDHMT04M	30.0 ~ 35.0	187.3	215.9	269.2	382.6	#4	1/4	PR120317
3	Z30SDHMT04M	36.0 ~ 47.0	209.5	241.3	295.3	408.0	#4	1/4	PR120317
4	Z40SDHMT05M	48.0 ~ 65.0	231.8	266.7	320.7	465.1	#5	1/4	PR120444
5~6	Z50SDHMT05M	64.0 ~ 88.0	273.1	317.5	388.9	531.8	#5	1/2	PR120571
7~8	Z70SDHMT05M	90.0 ~ 114.0	273.1	327.0	398.5	541.3	#5	1/2	PR120571

▶ You can also apply RCA(Rotary Coolant Adapter) for internal cooling. (See page 374)

TAPER SHANK HOLDERS


- HALTER MIT MORSEKEGEL
- Porte-plaquette à queue cône morse
- PUNTE CON ATTACCO CM

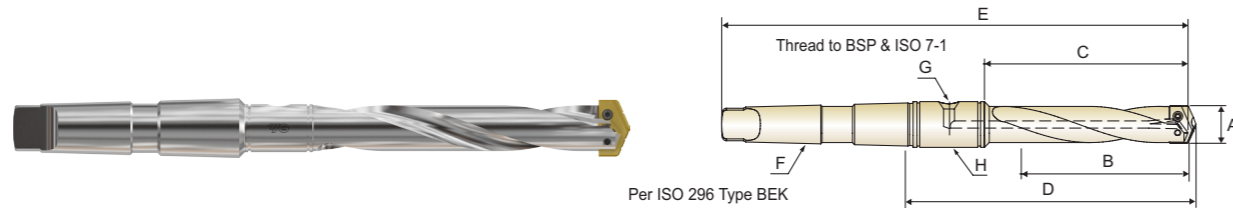

EXTENDED LENGTH - Helical Flute (Metric)

Series	EDP No.	Drill Insert Range A	Max. Drill Depth B	Body Length C	Ref. Length D	Overall Length E	MT F	Pipe Tap G	RCA H
Y	ZY0EXHMT02M	9.5 ~ 11.0	111.1	130.9	167.4	239.7	#2	1/16	PR120190
Z	ZZ0EXHMT02M	11.5 ~ 12.5	111.1	130.9	167.4	239.7	#2	1/16	PR120190
0	Z00EXHMT02M	13.0 ~ 17.5	114.3	135.0	171.8	243.7	#2	1/16	PR120190
0.5	Z05EXHMT02M	15.5 ~ 17.5	114.3	135.0	171.8	243.7	#2	1/16	PR120190
1	Z10EXHMT03M	18.0 ~ 24.0	273.1	301.6	345.7	435.8	#3	1/8	PR120254
1.5	Z15EXHMT03M	22.0 ~ 24.0	273.1	301.6	345.7	435.8	#3	1/8	PR120254
2	Z20EXHMT04M	25.0 ~ 35.0	289.0	317.5	363.6	477.0	#4	1/8	PR120254
2.5	Z25EXHMT04M	30.0 ~ 35.0	289.0	317.5	370.8	484.2	#4	1/4	PR120317

► You can also apply RCA(Rotary Coolant Adapter) for internal cooling. (See page 374)

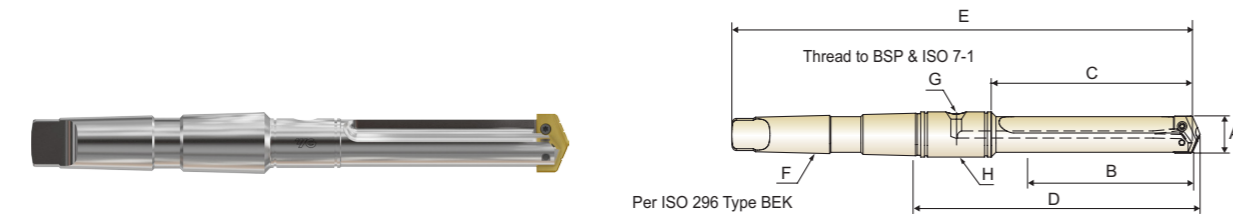


EXTENDED LENGTH - Straight Flute (Metric)

Series	EDP No.	Drill Insert Range A	Max. Drill Depth B	Body Length C	Ref. Length D	Overall Length E	MT F	Pipe Tap G	RCA H
3	Z30EXSMT04M	36.0 ~ 47.0	349.3	381.0	435.0	547.7	#4	1/4	PR120317
4	Z40EXSMT05M	48.0 ~ 65.0	422.3	457.2	511.2	655.6	#5	1/4	PR120444
5~6	Z50EXSMT05M	64.0 ~ 88.0	463.6	508.0	579.4	722.3	#5	1/2	PR120571
7~8	Z70EXSMT05M	90.0 ~ 114.0	555.6	609.6	681.1	823.9	#5	1/2	PR120571

► You can also apply RCA(Rotary Coolant Adapter) for internal cooling. (See page 374)

TAPER SHANK HOLDERS

- HALTER MIT MORSEKEGEL
- Porte-plaquette à queue cône morse
- PUNTE CON ATTACCO CM

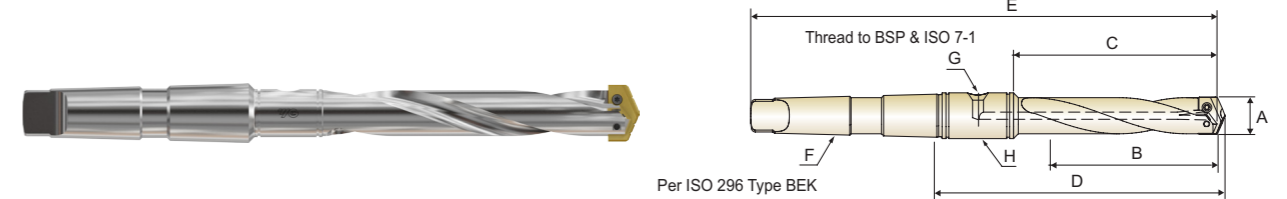



LONG LENGTH - Helical Flute (Metric)

Series	EDP No.	Drill Insert Range A	Max. Drill Depth B	Body Length C	Ref. Length D	Overall Length E	MT F	Pipe Tap G	RCA H
0	Z00LGHMT02M	13.0 ~ 17.5	177.8	198.5	235.3	307.2	#2	1/16	PR120190
0.5	Z05LGHMT02M	15.5 ~ 17.5	177.8	198.5	235.3	307.2	#2	1/16	PR120190

► You can also apply RCA(Rotary Coolant Adapter) for internal cooling. (See page 374)


FLANGED STRAIGHT SHANK HOLDERS

- HALTER MIT ZYLINDERSCHAFT UND SPANNFLÄCHE
- Porte-plaquette à colerette queue cylindrique
- PUNTE ATTACCO CILINDRICO FLANGIATO

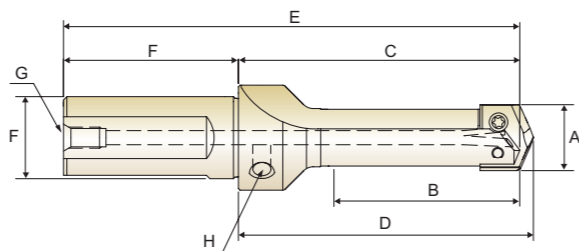

STUB LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range A	Max. Drill Depth B	Body Length C	Ref. Length D	Overall Length E	Shank		Pipe Tap	
							Dia. F	Length G	Rear H	Side I
Y	ZY0SBSF063I	3/8 ~ 27/64	3/4	1-7/8	1-31/32	3-3/4	5/8	1-7/8	1/16	1/8
Z	ZZ0SBSF063I	7/16 ~ 1/2	3/4	1-7/8	1-31/32	3-3/4	5/8	1-7/8	1/16	1/8
0	Z00SBSF075I	33/64 ~ 11/16	7/8	1-7/8	1-63/64	3-29/32	3/4	2-1/32	1/8	1/8
0.5	Z05SBSF075I	39/64 ~ 11/16	7/8	1-7/8	1-63/64	3-29/32	3/4	2-1/32	1/8	1/8
1	Z10SBSF100I	45/64 ~ 15/16	1-7/8	2-63/64	3-1/8	5-17/64	1	2-9/32	1/8	1/8
1.5	Z15SBSF100I	55/64 ~ 15/16	2-1/4	3-31/64	3-5/8	5-49/64	1	2-9/32	1/8	1/8
2	Z20SBSF125I	31/32 ~ 1-3/8	2-1/4	3-31/64	3-5/8	5-49/64	1-1/4	2-9/32	1/4	1/8
2.5	Z25SBSF125I	1-3/16 ~ 1-3/8	3-5/8	4-55/64	5	7-9/64	1-1/4	2-9/32	1/4	1/8
3	Z30SBSF150I	1-13/32 ~ 1-7/8	3	4-59/64	5-7/64	7-39/64	1-1/2	2-11/16	1/4	1/4

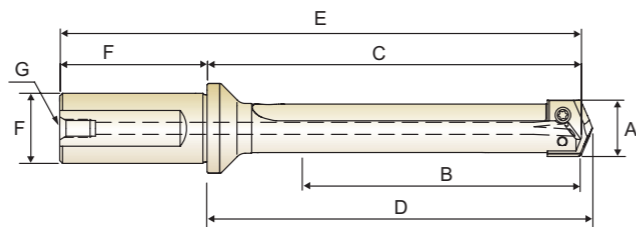


SHORT LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range A	Max. Drill Depth B	Body Length C	Ref. Length D	Overall Length E	Shank		Pipe Tap G
							Dia. F	Length H	
Y	ZY0STSF075I	3/8 ~ 27/64	1-1/4	2-13/32	2-1/2	4-7/16	3/4	2-1/32	1/8
Z	ZZ0STSF075I	7/16 ~ 1/2	1-1/4	2-13/32	2-1/2	4-7/16	3/4	2-1/32	1/8
0	Z00STSF075I	33/64 ~ 11/16	1-3/8	2-1/2	2-39/64	4-17/32	3/4	2-1/32	1/8
0.5	Z05STSF075I	39/64 ~ 11/16	1-3/8	2-1/2	2-39/64	4-17/32	3/4	2-1/32	1/8
1	Z10STSF100I	45/64 ~ 15/16	2-5/8	4-7/32	4-23/64	6-1/2	1	2-9/32	1/8
1.5	Z15STSF100I	55/64 ~ 15/16	2-5/8	4-7/32	4-23/64	6-1/2	1	2-9/32	1/8
2	Z20STSF125I	31/32 ~ 1-3/8	3-3/8	5-1/16	5-13/64	7-11/32	1-1/4	2-9/32	1/4
2.5	Z25STSF125I	1-3/16 ~ 1-3/8	3-3/8	5-1/16	5-13/64	7-11/32	1-1/4	2-9/32	1/4
3	Z30STSF150I	1-13/32 ~ 1-7/8	4-3/4	6-13/16	7	9-1/2	1-1/2	2-11/16	1/4
4	Z40STSF150I	1-29/32 ~ 2-9/16	5-1/8	7-1/16	7-1/4	9-3/4	1-1/2	2-11/16	1/4



FLANGED STRAIGHT SHANK HOLDERS

- HALTER MIT ZYLINDERSCHAFT UND SPANNFLÄCHE
- Porte-plaquette à colerette queue cylindrique
- PUNTE ATTACCO CILINDRICO FLANGIATO

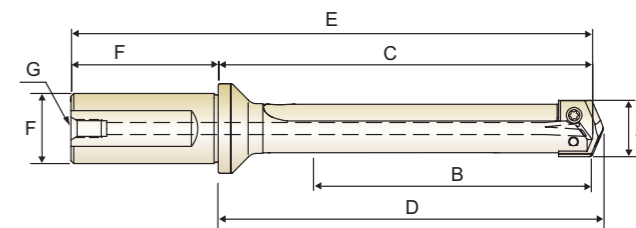

INTERMEDIATE LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range A	Max. Drill Depth B	Body Length C	Ref. Length D	Overall Length E	Shank		Pipe Tap G
							Dia. F	Length H	
1	Z10ITSF100I	45/64 ~ 15/16	4-5/8	6-3/32	6-15/64	8-3/8	1	2-9/32	1/8
1.5	Z15ITSF100I	55/64 ~ 15/16	4-5/8	6-3/32	6-15/64	8-3/8	1	2-9/32	1/8
2	Z20ITSF125I	31/32 ~ 1-3/8	5-3/8	7-1/16	7-13/64	9-11/32	1-1/4	2-9/32	1/4
2.5	Z25ITSF125I	1-3/16 ~ 1-3/8	5-3/8	7-1/16	7-13/64	9-11/32	1-1/4	2-9/32	1/4
3	Z30ITSF150I	1-13/32 ~ 1-7/8	6-1/2	8-9/16	8-3/4	11-1/4	1-1/2	2-11/16	1/4

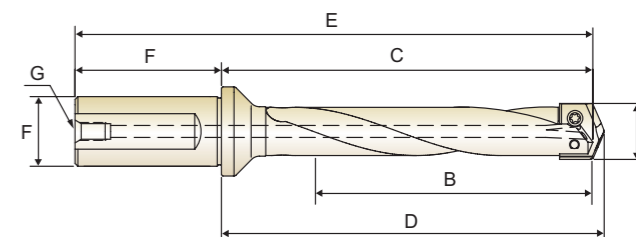

INTERMEDIATE LENGTH - Helical Flute (Inch)


Series	EDP No.	Drill Insert Range A	Max. Drill Depth B	Body Length C	Ref. Length D	Overall Length E	Shank		Pipe Tap G
							Dia. F	Length H	
1	Z10ITHF100I	45/64 ~ 15/16	4-5/8	6-3/32	6-15/64	8-3/8	1	2-9/32	1/8
1.5	Z15ITHF100I	55/64 ~ 15/16	4-5/8	6-3/32	6-15/64	8-3/8	1	2-9/32	1/8
2	Z20ITHF125I	31/32 ~ 1-3/8	5-3/8	7-1/16	7-13/64	9-11/32	1-1/4	2-9/32	1/4
2.5	Z25ITHF125I	1-3/16 ~ 1-3/8	5-3/8	7-1/16	7-13/64	9-11/32	1-1/4	2-9/32	1/4
3	Z30ITHF150I	1-13/32 ~ 1-7/8	6-1/2	8-9/16	8-3/4	11-1/4	1-1/2	2-11/16	1/4

Y/G SPADE DRILLS

Z**SDSF SERIES
Z**SDHF SERIES


FLANGED STRAIGHT SHANK HOLDERS

- HALTER MIT ZYLINDERSCHAFT UND SPANNFLÄCHE
- Porte-plaquette à colerette queue cylindrique
- PUNTE ATTACCO CILINDRICO FLANGIATO

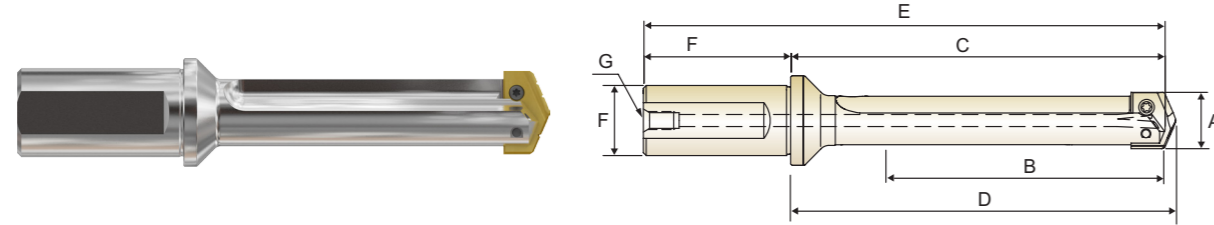

STANDARD LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range A	Max. Drill Depth B	Body Length C	Ref. Length D	Overall Length E	Shank		Pipe Tap G
							Dia. F	Length	
Y	ZY0SDSF075I	3/8 ~ 27/64	2-3/8	3-17/32	3-5/8	5-9/16	3/4	2-1/32	1/8
Z	ZZ0SDSF075I	7/16 ~ 1/2	2-3/8	3-17/32	3-5/8	5-9/16	3/4	2-1/32	1/8
0	Z00SDSF075I	33/64 ~ 11/16	2-1/2	3-5/8	3-47/64	5-21/32	3/4	2-1/32	1/8
0.5	Z05SDSF075I	39/64 ~ 11/16	2-1/2	3-5/8	3-47/64	5-21/32	3/4	2-1/32	1/8
1	Z10SDSF100I	45/64 ~ 15/16	6-5/8	8-3/32	8-15/64	10-3/8	1	2-9/32	1/8
1.5	Z15SDSF100I	55/64 ~ 15/16	6-5/8	8-3/32	8-15/64	10-3/8	1	2-9/32	1/8
2	Z20SDSF125I	31/32 ~ 1-3/8	7-3/8	9-1/16	9-13/64	11-11/32	1-1/4	2-9/32	1/4
2.5	Z25SDSF125I	1-3/16 ~ 1-3/8	7-3/8	9-1/16	9-13/64	11-11/32	1-1/4	2-9/32	1/4
3	Z30SDSF150I	1-13/32 ~ 1-7/8	8-1/4	10-5/16	10-1/2	13	1-1/2	2-11/16	1/4
4	Z40SDSF150I	1-29/32 ~ 2-9/16	9-1/8	11-1/16	11-1/4	13-3/4	1-1/2	2-11/16	1/4

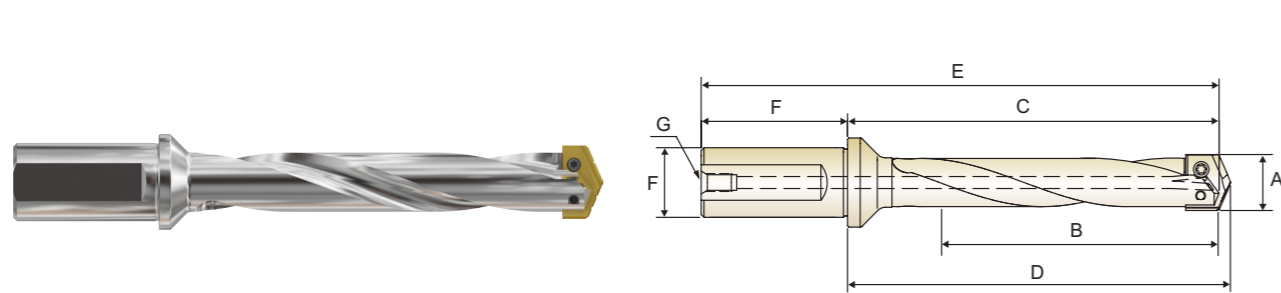

STANDARD LENGTH - Helical Flute (Inch)


Series	EDP No.	Drill Insert Range A	Max. Drill Depth B	Body Length C	Ref. Length D	Overall Length E	Shank		Pipe Tap G
							Dia. F	Length	
Y	ZY0SDHF075I	3/8 ~ 27/64	2-3/8	3-17/32	3-5/8	5-9/16	3/4	2-1/32	1/8
Z	ZZ0SDHF075I	7/16 ~ 1/2	2-3/8	3-17/32	3-5/8	5-9/16	3/4	2-1/32	1/8
0	Z00SDHF075I	33/64 ~ 11/16	2-1/2	3-5/8	3-47/64	5-21/32	3/4	2-1/32	1/8
0.5	Z05SDHF075I	39/64 ~ 11/16	2-1/2	3-5/8	3-47/64	5-21/32	3/4	2-1/32	1/8
1	Z10SDHF100I	45/64 ~ 15/16	6-5/8	8-3/32	8-15/64	10-3/8	1	2-9/32	1/8
1.5	Z15SDHF100I	55/64 ~ 15/16	6-5/8	8-3/32	8-15/64	10-3/8	1	2-9/32	1/8
2	Z20SDHF125I	31/32 ~ 1-3/8	7-3/8	9-1/16	9-13/64	11-11/32	1-1/4	2-9/32	1/4
2.5	Z25SDHF125I	1-3/16 ~ 1-3/8	7-3/8	9-1/16	9-13/64	11-11/32	1-1/4	2-9/32	1/4
3	Z30SDHF150I	1-13/32 ~ 1-7/8	8-1/4	10-5/16	10-1/2	13	1-1/2	2-11/16	1/4
4	Z40SDHF150I	1-29/32 ~ 2-9/16	9-1/8	11-1/16	11-1/4	13-3/4	1-1/2	2-11/16	1/4

Y/G SPADE DRILLS

Z**EXSF SERIES
Z**EXHF SERIES


FLANGED STRAIGHT SHANK HOLDERS

- HALTER MIT ZYLINDERSCHAFT UND SPANNFLÄCHE
- Porte-plaquette à colerette queue cylindrique
- PUNTE ATTACCO CILINDRICO FLANGIATO

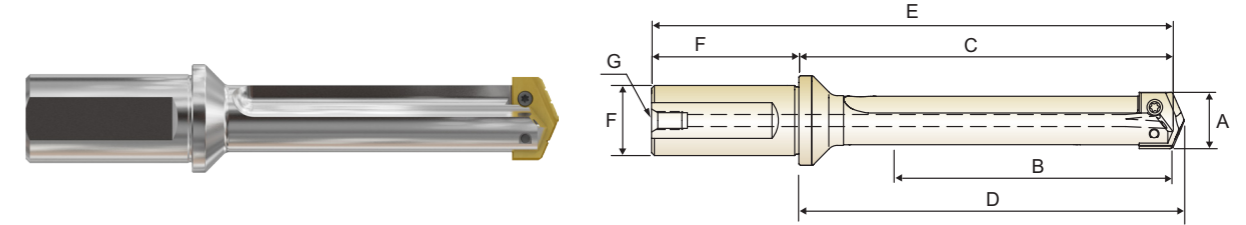

EXTENDED LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range A	Max. Drill Depth B	Body Length C	Ref. Length D	Overall Length E	Shank		Pipe Tap G
							Dia. F	Length	
Y	ZY0EXSF075I	3/8 ~ 27/64	4-3/8	5-17/32	5-5/8	7-9/16	3/4	2-1/32	1/8
Z	ZZ0EXSF075I	7/16 ~ 1/2	4-3/8	5-17/32	5-5/8	7-9/16	3/4	2-1/32	1/8
0	Z00EXSF075I	33/64 ~ 11/16	4-1/2	5-5/8	5-47/64	7-21/32	3/4	2-1/32	1/8
0.5	Z05EXSF075I	39/64 ~ 11/16	4-1/2	5-5/8	5-47/64	7-21/32	3/4	2-1/32	1/8
1	Z10EXSF100I	45/64 ~ 15/16	10-5/8	12-3/32	12-15/64	14-3/8	1	2-9/32	1/8
1.5	Z15EXSF100I	55/64 ~ 15/16	10-5/8	12-3/32	12-15/64	14-3/8	1	2-9/32	1/8
2	Z20EXSF125I	31/32 ~ 1-3/8	11-3/8	13-1/16	13-13/64	15-11/32	1-1/4	2-9/32	1/4
2.5	Z25EXSF125I	1-3/16 ~ 1-3/8	11-3/8	13-1/16	13-13/64	15-11/32	1-1/4	2-9/32	1/4

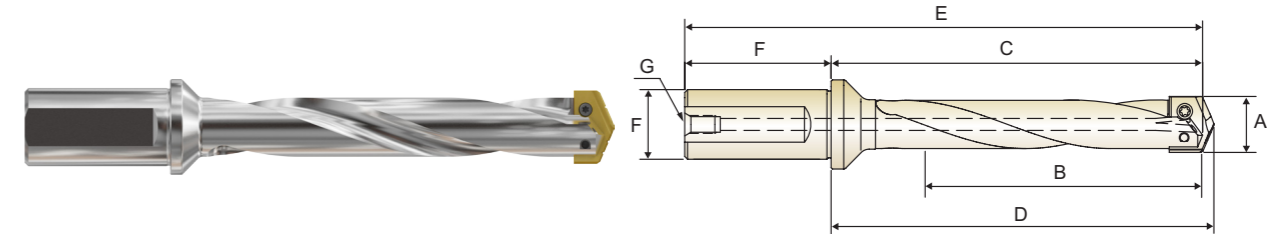


EXTENDED LENGTH - Helical Flute (Inch)

Series	EDP No.	Drill Insert Range A	Max. Drill Depth B	Body Length C	Ref. Length D	Overall Length E	Shank		Pipe Tap G
							Dia. F	Length	
Y	ZY0EXHF075I	3/8 ~ 27/64	4-3/8	5-17/32	5-5/8	7-9/16	3/4	2-1/32	1/8
Z	ZZ0EXHF075I	7/16 ~ 1/2	4-3/8	5-17/32	5-5/8	7-9/16	3/4	2-1/32	1/8
0	Z00EXHF075I	33/64 ~ 11/16	4-1/2	5-5/8	5-47/64	7-21/32	3/4	2-1/32	1/8
0.5	Z05EXHF075I	39/64 ~ 11/16	4-1/2	5-5/8	5-47/64	7-21/32	3/4	2-1/32	1/8
1	Z10EXHF100I	45/64 ~ 15/16	10-5/8	12-3/32	12-15/64	14-3/8	1	2-9/32	1/8
1.5	Z15EXHF100I	55/64 ~ 15/16	10-5/8	12-3/32	12-15/64	14-3/8	1	2-9/32	1/8
2	Z20EXHF125I	31/32 ~ 1-3/8	11-3/8	13-1/16	13-13/64	15-11/32	1-1/4	2-9/32	1/4
2.5	Z25EXHF125I	1-3/16 ~ 1-3/8	11-3/8	13-1/16	13-13/64	15-11/32	1-1/4	2-9/32	1/4


FLANGED STRAIGHT SHANK HOLDERS

- HALTER MIT ZYLINDERSCHAFT UND SPANNFLÄCHE
- Porte-plaquette à colerette queue cylindrique
- PUNTE ATTACCO CILINDRICO FLANGIATO

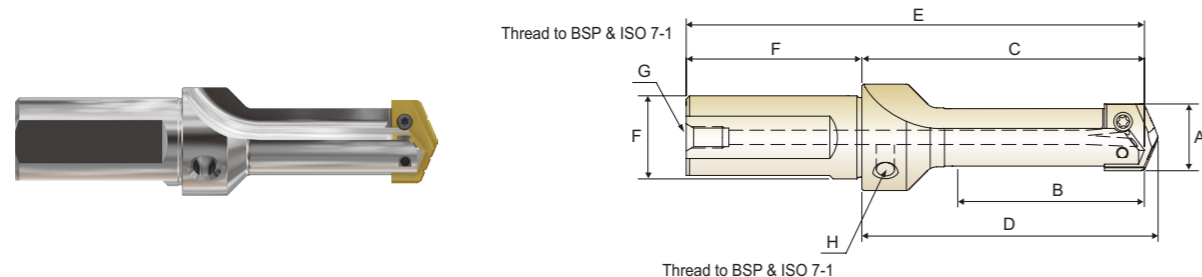

STUB LENGTH - Straight Flute (Metric)

Series	EDP No.	Drill Insert Range A	Max. Drill Depth B	Body Length C	Ref. Length D	Overall Length E	Shank		Pipe Tap	
							Dia. F	Length G	Rear H	Side
Y	ZY0SBSF016M	9.5 ~ 11.0	19.1	47.6	50.0	95.6	16.0	48.0	1/16	1/8
Z	ZZ0SBSF016M	11.5 ~ 12.5	19.1	47.6	50.0	95.6	16.0	48.0	1/16	1/8
0	Z00SBSF020M	13.0 ~ 17.5	22.2	47.6	50.4	97.6	20.0	50.0	1/8	1/8
0.5	Z05SBSF020M	15.5 ~ 17.5	22.2	47.6	50.4	97.6	20.0	50.0	1/8	1/8
1	Z10SBSF025M	18.0 ~ 24.0	47.6	75.8	79.4	131.8	25.0	56.0	1/8	1/8
1.5	Z15SBSF025M	22.0 ~ 24.0	57.2	88.5	92.1	144.5	25.0	56.0	1/8	1/8
2	Z20SBSF032M	25.0 ~ 35.0	57.2	88.5	92.1	148.5	32.0	60.0	1/4	1/8
2.5	Z25SBSF032M	30.0 ~ 35.0	92.1	123.4	127.0	183.4	32.0	60.0	1/4	1/8
3	Z30SBSF040M	36.0 ~ 47.0	76.2	125.0	129.8	195.0	40.0	70.0	1/4	1/4

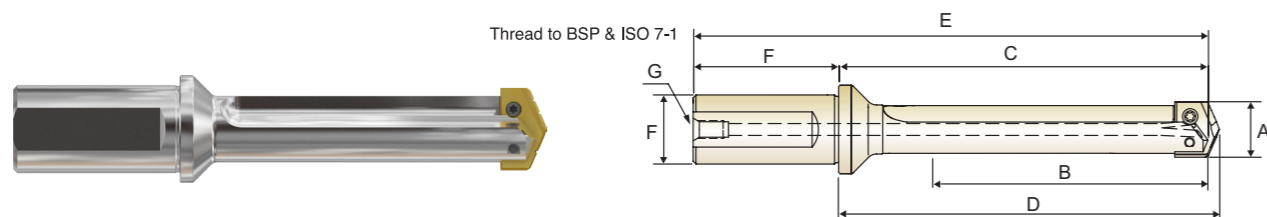


SHORT LENGTH - Straight Flute (Metric)

Series	EDP No.	Drill Insert Range A	Max. Drill Depth B	Body Length C	Ref. Length D	Overall Length E	Shank		Pipe Tap G
							Dia. F	Length H	
Y	ZY0STSF020M	9.5 ~ 11.0	31.8	61.1	63.5	111.1	20.0	50.0	1/8
Z	ZZ0STSF020M	11.5 ~ 12.5	31.8	61.1	63.5	111.1	20.0	50.0	1/8
0	Z00STSF020M	13.0 ~ 17.5	34.9	63.5	66.3	113.5	20.0	50.0	1/8
0.5	Z05STSF020M	15.5 ~ 17.5	34.9	63.5	66.3	113.5	20.0	50.0	1/8
1	Z10STSF025M	18.0 ~ 24.0	66.7	107.2	110.7	163.2	25.0	56.0	1/8
1.5	Z15STSF025M	22.0 ~ 24.0	66.7	107.2	110.7	163.2	25.0	56.0	1/8
2	Z20STSF032M	25.0 ~ 35.0	85.7	128.6	132.2	188.6	32.0	60.0	1/4
2.5	Z25STSF032M	30.0 ~ 35.0	85.7	128.6	132.2	188.6	32.0	60.0	1/4
3	Z30STSF040M	36.0 ~ 47.0	120.7	173.0	177.8	243.0	40.0	70.0	1/4
4	Z40STSF040M	48.0 ~ 65.0	130.2	179.4	184.0	249.4	40.0	70.0	1/4


FLANGED STRAIGHT SHANK HOLDERS

- HALTER MIT ZYLINDERSCHAFT UND SPANNFLÄCHE
- Porte-plaquette à colerette queue cylindrique
- PUNTE ATTACCO CILINDRICO FLANGIATO

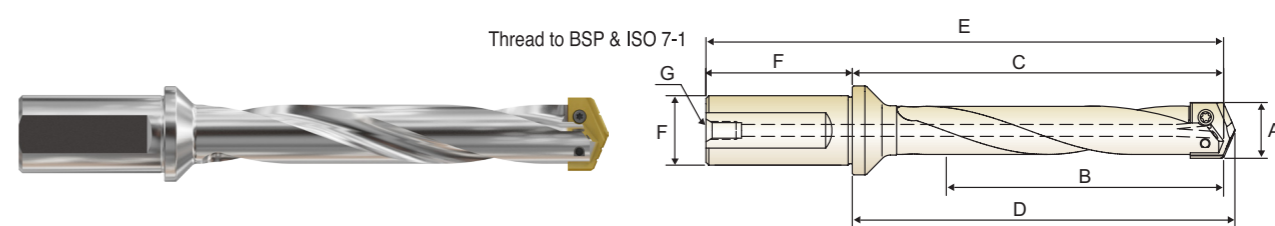

INTERMEDIATE LENGTH - Helical Flute (Metric)

Series	EDP No.	Drill Insert Range A	Max. Drill Depth B	Body Length C	Ref. Length D	Overall Length E	Shank		Pipe Tap G
							Dia. F	Length H	
1	Z10ITHF025M	18.0 ~ 24.0	117.5	154.8	158.4	210.8	25.0	56.0	1/8
1.5	Z15ITHF025M	22.0 ~ 24.0	117.5	154.8	158.4	210.8	25.0	56.0	1/8
2	Z20ITHF032M	25.0 ~ 35.0	136.5	179.4	183.0	239.4	32.0	60.0	1/4
2.5	Z25ITHF032M	30.0 ~ 35.0	136.5	179.4	183.0	239.4	32.0	60.0	1/4
3	Z30ITHF040M	36.0 ~ 47.0	165.1	217.5	222.3	287.5	40.0	70.0	1/4

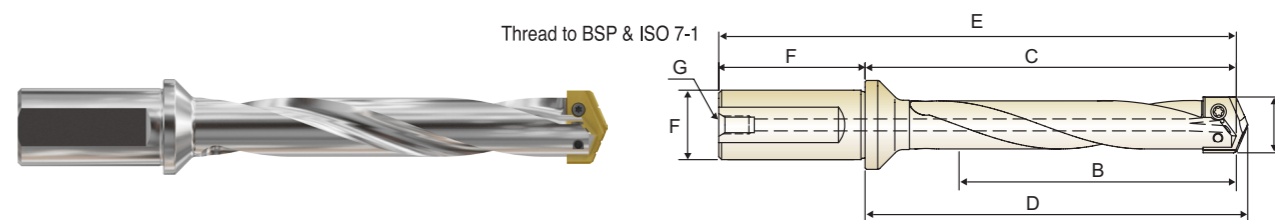


STANDARD LENGTH - Helical Flute (Metric)

Series	EDP No.	Drill Insert Range A	Max. Drill Depth B	Body Length C	Ref. Length D	Overall Length E	Shank		Pipe Tap G
							Dia. F	Length H	
Y	ZY0SDHF020M	9.5 ~ 11.0	60.3	89.7	92.1	139.7	20.0	50.0	1/8
Z	ZZ0SDHF020M	11.5 ~ 12.5	60.3	89.7	92.1	139.7	20.0	50.0	1/8
0	Z00SDHF020M	13.0 ~ 17.5	63.5	92.1	94.9	142.1	20.0	50.0	1/8
0.5	Z05SDHF020M	15.5 ~ 17.5	63.5	92.1	94.9	142.1	20.0	50.0	1/8
1	Z10SDHF025M	18.0 ~ 24.0	168.3	205.6	209.2	261.6	25.0	56.0	1/8
1.5	Z15SDHF025M	22.0 ~ 24.0	168.3	205.6	209.2	261.6	25.0	56.0	1/8
2	Z20SDHF032M	25.0 ~ 35.0	187.3	230.2	233.8	290.2	32.0	60.0	1/4
2.5	Z25SDHF032M	30.0 ~ 35.0	187.3	230.2	233.8	290.2	32.0	60.0	1/4
3	Z30SDHF040M	36.0 ~ 47.0	209.6	261.9	266.7	331.9	40.0	70.0	1/4
4	Z40SDHF040M	48.0 ~ 65.0	231.8	281.0	285.8	351.0	40.0	70.0	1/4


FLANGED STRAIGHT SHANK HOLDERS

- HALTER MIT ZYLINDERSCHAFT UND SPANNFLÄCHE
- Porte-plaquette à colerette queue cylindrique
- PUNTE ATTACCO CILINDRICO FLANGIATO

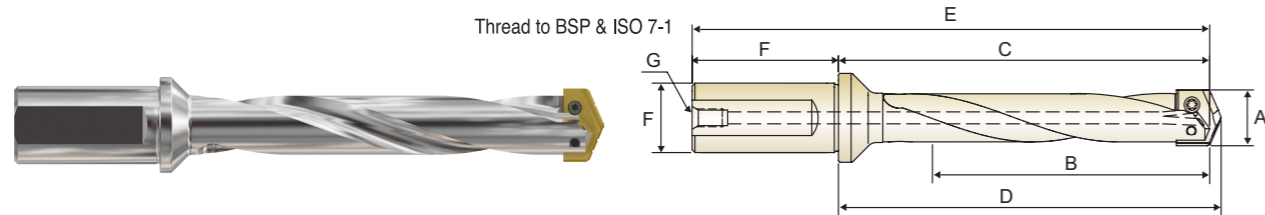

EXTENDED LENGTH - Helical Flute (Metric)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap
							Dia.	Length	
		A	B	C	D	E	F	G	
Y	ZY0EXHF020M	9.5 ~ 11.0	111.1	140.5	142.9	190.5	20.0	50.0	1/8
Z	ZZ0EXHF020M	11.5 ~ 12.5	111.1	140.5	142.9	190.5	20.0	50.0	1/8
0	Z00EXHF020M	13.0 ~ 17.5	114.3	142.9	145.7	192.9	20.0	50.0	1/8
0.5	Z05EXHF020M	15.5 ~ 17.5	114.3	142.9	145.7	192.9	20.0	50.0	1/8
1	Z10EXHF025M	18.0 ~ 24.0	269.9	307.2	310.8	363.2	25.0	56.0	1/8
1.5	Z15EXHF025M	22.0 ~ 24.0	269.9	307.2	310.8	363.2	25.0	56.0	1/8
2	Z20EXHF032M	25.0 ~ 35.0	288.9	331.8	335.4	391.8	32.0	60.0	1/4
2.5	Z25EXHF032M	30.0 ~ 35.0	288.9	331.8	335.4	391.8	32.0	60.0	1/4

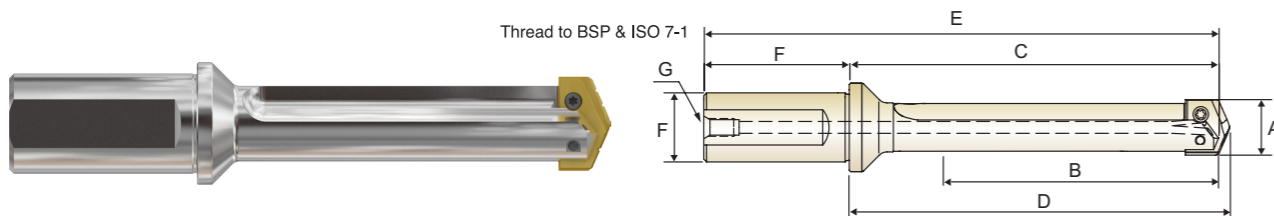


EXTENDED LENGTH - Straight Flute (Metric)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap
							Dia.	Length	
		A	B	C	D	E	F	G	
3	Z30EXSF040M	36.0 ~ 47.0	349.3	401.6	406.4	471.6	40.0	70.0	1/4
4	Z40EXSF040M	48.0 ~ 65.0	422.3	471.5	476.3	541.5	40.0	70.0	1/4


STRAIGHT SHANK HOLDERS

- HALTER MIT ZYLINDERSCHAFT
- Porte-plaquette à queue cylindrique
- PUNTE ATTACCO CILINDRICO FLANGIATO

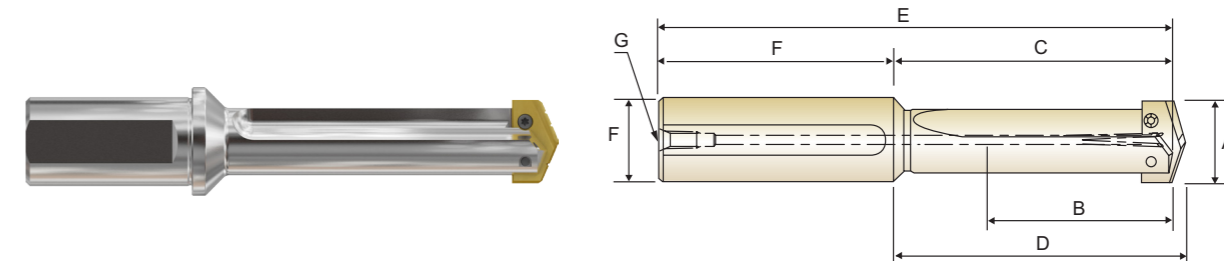

SHORT LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap
							Dia.	Length	
		A	B	C	D	E	F	G	
Y	ZY0STSS075I	3/8 ~ 27/64	1-1/4	2-1/32	2-1/8	4-13/32	3/4	2-3/8	1/8
Z	ZZ0STSS075I	7/16 ~ 1/2	1-1/4	2-1/32	2-1/8	4-13/32	3/4	2-3/8	1/8
0	Z00STSS075I	33/64 ~ 11/16	1-3/8	2-3/16	2-19/64	4-9/16	3/4	2-3/8	1/8
0.5	Z05STSS075I	39/64 ~ 11/16	1-3/8	2-3/16	2-19/64	4-9/16	3/4	2-3/8	1/8

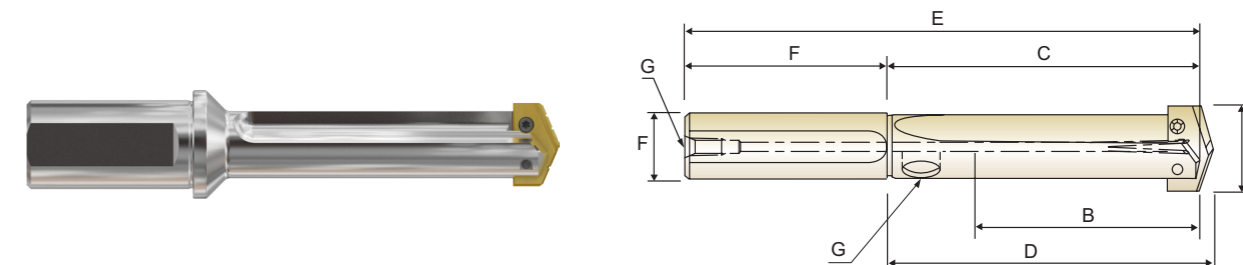


SHORT LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	Shank		Pipe Tap
							Dia.	Length	
		A	B	C	D	E	F	G	
1	* Z10STSS075I	45/64 ~ 15/16	2-5/8	3-7/8	4-1/64	6-7/8	3/4	3	1/8
	Z10STSS100I	45/64 ~ 15/16	2-5/8	3-7/8	4-1/64	6-7/8	1	3	1/8
1.5	* Z15STSS075I	55/64 ~ 15/16	2-5/8	3-7/8	4-1/64	6-7/8	3/4	3	1/8
	Z15STSS100I	55/64 ~ 15/16	2-5/8	3-7/8	4-1/64	6-7/8	1	3	1/8
2	Z20STSS100I	31/32 ~ 1-3/8	3-3/8	4-1/2	4-41/64	8	1	3-1/2	1/8
	Z20STSS125I	31/32 ~ 1-3/8	3-3/8	4-1/2	4-41/64	8	1-1/4	3-1/2	1/8
2.5	* Z25STSS100I	1-3/16 ~ 1-3/8	3-3/8	4-1/2	4-41/64	8	1	3-1/2	1/8
	Z25STSS125I	1-3/16 ~ 1-3/8	3-3/8	4-1/2	4-41/64	8	1-1/4	3-1/2	1/8
3	Z30STSS125I	1-13/32 ~ 1-7/8	4-3/4	6	6-3/16	10	1-1/4	4	1/4
	Z30STSS150I	1-13/32 ~ 1-7/8	4-3/4	6	6-3/16	10	1-1/2	4	1/4
4	Z40STSS150I	1-29/32 ~ 2-9/16	5-1/8	6-1/2	6-11/16	10-1/2	1-1/2	4	1/4
	Z40STSS175I	1-29/32 ~ 2-9/16	5-1/8	6-1/2	6-11/16	10-1/2	1-3/4	4	1/4
5	Z50STSS200I	2-1/2 ~ 3-1/2	6-3/4	8-1/2	8-3/4	12-1/2	2	4	1/2

* Flanged type

STRAIGHT SHANK HOLDERS

- HALTER MIT ZYLINDERSCHAFT
- Porte-plaquette à queue cylindrique
- PUNTE ATTACCO CILINDRICO FLANGIATO

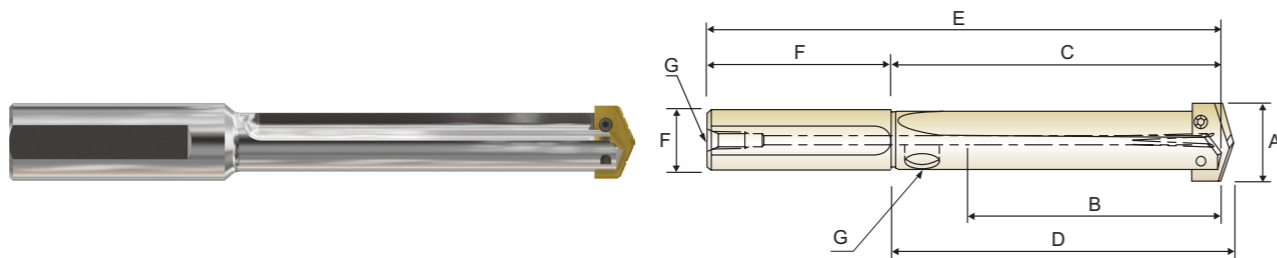


INTERMEDIATE LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range A	Max. Drill Depth B	Body Length C	Ref. Length D	Overall Length E	Shank		Pipe Tap G
							Dia. F	Length	
1	Z10ITSS100I	45/64 ~ 15/16	4-5/8	5-7/8	6-1/64	8-7/8	1	3	1/8
1.5	Z15ITSS100I	55/64 ~ 15/16	4-5/8	5-7/8	6-1/64	8-7/8	1	3	1/8
2	Z20ITSS125I	31/32 ~ 1-3/8	5-3/8	6-1/2	6-41/64	10	1-1/4	3-1/2	1/8
2.5	Z25ITSS125I	1-3/16 ~ 1-3/8	5-3/8	6-1/2	6-41/64	10	1-1/4	3-1/2	1/8
3	Z30ITSS150I	1-13/32 ~ 1-7/8	6-1/2	7-3/4	7-15/16	11-3/4	1-1/2	4	1/4


STRAIGHT SHANK HOLDERS

- HALTER MIT ZYLINDERSCHAFT
- Porte-plaquette à queue cylindrique
- PUNTE ATTACCO CILINDRICO FLANGIATO

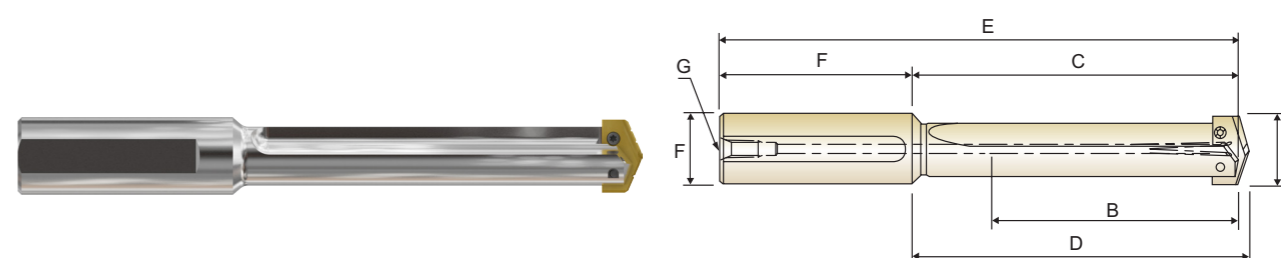

STANDARD LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range A	Max. Drill Depth B	Body Length C	Ref. Length D	Overall Length E	Shank		Pipe Tap G
							Dia. F	Length	
Y	ZY0SDSS075I	3/8 ~ 27/64	2-3/8	3-5/32	3-1/4	5-17/32	3/4	2-3/8	1/8
Z	ZZ0SDSS075I	7/16 ~ 1/2	2-3/8	3-5/32	3-1/4	5-17/32	3/4	2-3/8	1/8
0	Z00SDSS075I	33/64 ~ 11/16	2-1/2	3-5/16	3-27/64	5-11/16	3/4	2-3/8	1/8
0.5	Z05SDSS075I	39/64 ~ 11/16	2-1/2	3-5/16	3-27/64	5-11/16	3/4	2-3/8	1/8

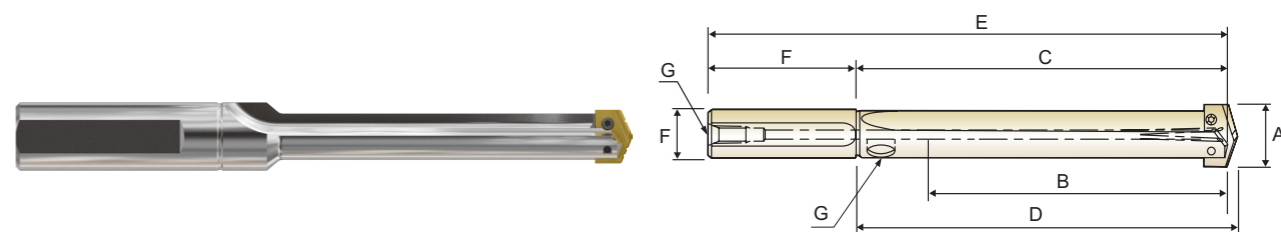


STANDARD LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range A	Max. Drill Depth B	Body Length C	Ref. Length D	Overall Length E	Shank		Pipe Tap G
							Dia. F	Length	
1	* Z10SDSS075I	45/64 ~ 15/16	6-5/8	7-7/8	8-1/64	10-7/8	3/4	3	1/8
	Z10SDSS100I	45/64 ~ 15/16	6-5/8	7-7/8	8-1/64	10-7/8	1	3	1/8
1.5	* Z15SDSS075I	55/64 ~ 15/16	6-5/8	7-7/8	8-1/64	10-7/8	3/4	3	1/8
	Z15SDSS100I	55/64 ~ 15/16	6-5/8	7-7/8	8-1/64	10-7/8	1	3	1/8
2	Z20SDSS100I	31/32 ~ 1-3/8	7-3/8	8-1/2	8-41/64	12	1	3-1/2	1/8
	Z20SDSS125I	31/32 ~ 1-3/8	7-3/8	8-1/2	8-41/64	12	1-1/4	3-1/2	1/8
2.5	* Z25SDSS100I	1-3/16 ~ 1-3/8	7-3/8	8-1/2	8-41/64	12	1	3-1/2	1/8
	Z25SDSS125I	1-3/16 ~ 1-3/8	7-3/8	8-1/2	8-41/64	12	1-1/4	3-1/2	1/8
3	Z30SDSS125I	1-13/32 ~ 1-7/8	8-1/4	9-1/2	9-11/16	13-1/2	1-1/4	4	1/4
	Z30SDSS150I	1-13/32 ~ 1-7/8	8-1/4	9-1/2	9-11/16	13-1/2	1-1/2	4	1/4
4	Z40SDSS150I	1-29/32 ~ 2-9/16	9-1/8	10-1/2	10-11/16	14-1/2	1-1/2	4	1/4
	Z40SDSS175I	1-29/32 ~ 2-9/16	9-1/8	10-1/2	10-11/16	14-1/2	1-3/4	4	1/4
5~6	Z50SDSS200I	2-1/2 ~ 3-1/2	10-3/4	12-1/2	12-3/4	16-1/2	2	4	1/2
7~8	Z70SDSS300I	3-17/32 ~ 4-1/2	10-3/4	12-7/8	13-1/8	17-7/8	3	5	1/2

▶ * Flanged type


STRAIGHT SHANK HOLDERS

- HALTER MIT ZYLINDERSCHAFT
- Porte-plaquette à queue cylindrique
- PUNTE ATTACCO CILINDRICO FLANGIATO

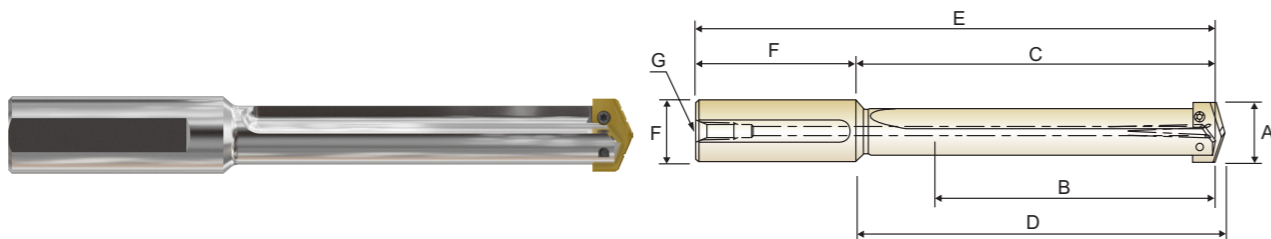

EXTENDED LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range A	Max. Drill Depth B	Body Length C	Ref. Length D	Overall Length E	Shank		Pipe Tap G
							Dia.	Length F	
Y	ZY0EXSS075I	3/8 ~ 27/64	4-3/8	5-5/32	5-1/4	7-17/32	3/4	2-3/8	1/8
Z	ZZ0EXSS075I	7/16 ~ 1/2	4-3/8	5-5/32	5-1/4	7-17/32	3/4	2-3/8	1/8
0	Z00EXSS075I	33/64 ~ 11/16	4-1/2	5-5/16	5-27/64	7-11/16	3/4	2-3/8	1/8
0.5	Z05EXSS075I	39/64 ~ 11/16	4-1/2	5-5/16	5-27/64	7-11/16	3/4	2-3/8	1/8

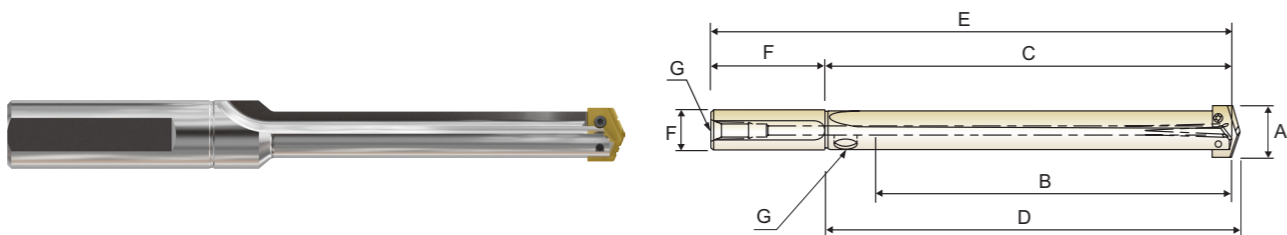


EXTENDED LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range A	Max. Drill Depth B	Body Length C	Ref. Length D	Overall Length E	Shank		Pipe Tap G
							Dia.	Length F	
1	Z10EXSS100I	45/64 ~ 15/16	10-5/8	11-7/8	12-1/64	14-7/8	1	3	1/8
1.5	Z15EXSS100I	55/64 ~ 15/16	10-5/8	11-7/8	12-1/64	14-7/8	1	3	1/8
2	Z20EXSS125I	31/32 ~ 1-3/8	11-3/8	12-1/2	12-41/64	16	1-1/4	3-1/2	1/8
2.5	Z25EXSS125I	1-3/16 ~ 1-3/8	11-3/8	12-1/2	12-41/64	16	1-1/4	3-1/2	1/8
3	Z30EXSS125I	1-13/32 ~ 1-7/8	13-3/4	15	15-3/16	19	1-1/4	4	1/4
4	Z40EXSS150I	1-29/32 ~ 2-9/16	16-5/8	18	18-3/16	22	1-1/2	4	1/4
5~6	Z50EXSS200I	2-1/2 ~ 3-1/2	18-1/4	20	20-1/4	24	2	4	1/2
7~8	Z70EXSS300I	3-17/32 ~ 4-1/2	21-7/8	24	24-1/4	29	3	5	1/2

STRAIGHT SHANK HOLDERS


- HALTER MIT ZYLINDERSCHAFT
- Porte-plaquette à queue cylindrique
- PUNTE ATTACCO CILINDRICO FLANGIATO



LONG LENGTH - Straight Flute (Inch)

Series	EDP No.	Drill Insert Range A	Max. Drill Depth B	Body Length C	Ref. Length D	Overall Length E	Shank		Pipe Tap G
							Dia.	Length F	
0	Z00LGSS075I	33/64 ~ 11/16	7	7-13/16	7-59/64	10-3/16	3/4	2-3/8	1/8
0.5	Z05LGSS075I	39/64 ~ 11/16	7	7-13/16	7-59/64	10-3/16	3/4	2-3/8	1/8

**HOLDER ACCESSORIES
ROTARY COOLANT ADAPTER (RCA) AND ACCESSORIES**

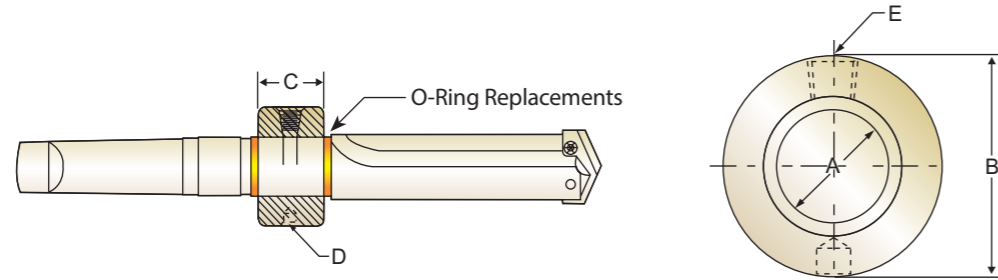

Inch

Item No.	I.D.	O.D.	Length	Thread for Driving Rod	Pipe Tap
	A	B			
PR110048	3/4	1-3/4	7/8	5/16-NC	1/8
PR110100	1	2-1/8	1-1/8	5/16-NC	1/8
PR110116	1-1/4	2-1/2	1-3/8	3/8-NC	1/4
PR110148	1-3/4	3	1-3/8	3/8-NC	1/4
PR110216	2-1/4	3-3/4	1-3/4	1/2-NC	1/2

Metric

Item No.	I.D.	O.D.	Length	Thread for Driving Rod	Pipe Tap
	A	B			
PR120190	19.05	44.45	22.23	M8 × 1.25	1/8
PR120254	25.40	53.97	28.57	M8 × 1.25	1/8
PR120317	31.75	63.50	34.92	M10 × 1.5	1/4
PR120444	44.45	76.20	34.92	M10 × 1.5	1/4
PR120571	57.15	95.27	44.45	M12 × 1.75	1/2

◆ Thread to BSP & ISO 7-1

TORX SCREWS

Holder Series	Item No.	TORX Hand Driver	Drill Range Used With	
			Inch	Metric
Y	J07Y0010	J05Y0070	3/8 ~ 27/64	9.5 mm ~ 11.0 mm
Z	J07Z0110		7/16 ~ 1/2	11.5 mm ~ 12.5 mm
0	J0800210	J0500080	33/64 ~ 11/16	13.0 mm ~ 17.5 mm
0.5	J0805310		39/64 ~ 11/16	15.5 mm ~ 17.5 mm
1	J0910410	J0510090	45/64 ~ 15/16	18.0 mm ~ 24.0 mm
1.5	J0915510		55/64 ~ 15/16	22.0 mm ~ 24.0 mm
2	J1520610	J0520150	31/32 ~ 1-3/8	25.0 mm ~ 35.0 mm
2.5	J1525710		1-3/16 ~ 1-3/8	30.0 mm ~ 35.0 mm
3,4	J2030810	J0530200	1-13/32 ~ 2-9/16	36.0 mm ~ 65.0 mm
5 ~ 8	J2550910		J0550250	2-1/2 ~ 4-1/2

** Note : Replacement screws sold in packages(10 screws per package)

SPADE DRILL HSS M4

Vc = m/min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc			Feed						
			TiN	TiCN	TiAlN	Ø9.5-12.5	Ø13-17.5	Ø18-24	Ø25-35	Ø36-47	Ø48-65	Ø66-114
P	1	Non-alloy steel	54	67	75	0.15	0.22	0.28	0.37	0.46	0.56	0.67
	2		49	58	69	0.13	0.19	0.24	0.34	0.43	0.50	0.57
	3		45	56	63	0.13	0.19	0.23	0.34	0.43	0.50	0.58
	4		45	56	63	0.13	0.19	0.23	0.34	0.43	0.50	0.58
	6	Low alloy steel	45	56	58	0.13	0.20	0.24	0.36	0.42	0.46	0.55
	7		41	50	56	0.13	0.16	0.23	0.35	0.41	0.44	0.55
	15		Grey cast iron	48	58	70	0.14	0.26	0.35	0.45	0.56	0.64
16	29	35		41	0.10	0.15	0.16	0.23	0.28	0.35	0.40	
K	17	Nodular cast iron	48	58	70	0.14	0.26	0.35	0.45	0.56	0.64	0.68
	18		35	44	52	0.13	0.17	0.23	0.3	0.35	0.43	0.50
	19	Malleable cast iron	52	64	75	0.16	0.30	0.40	0.49	0.59	0.69	0.75
	20		35	44	52	0.13	0.17	0.23	0.30	0.35	0.43	0.50
N	21	Aluminum-wrought alloy	187	229	244	0.19	0.33	0.41	0.50	0.54	0.64	0.70
	22		92	137	137	0.19	0.33	0.41	0.46	0.54	0.64	0.70
	27	Copper and Copper Alloys (Bronze / Brass)	95	128	142	0.19	0.31	0.43	0.53	0.64	0.74	0.79

► The recommendations for speeds, feeds and other parameters presented in this chart are nominal recommendations and should be considered only as good starting points. Speed and feed reductions (20% reduction in speed and 10% reduction in feed) are recommended.

SPADE DRILL HSS T15

Vc = m/min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc			Feed						
			TiN	TiCN	TiAlN	Ø9.5-12.5	Ø13-17.5	Ø18-24	Ø25-35	Ø36-47	Ø48-65	Ø66-114
P	1	Non-alloy steel	54	67	75	0.15	0.22	0.28	0.37	0.46	0.56	0.67
	2		49	58	69	0.13	0.19	0.24	0.34	0.43	0.50	0.57
	3		45	56	63	0.13	0.19	0.23	0.34	0.43	0.50	0.58
	4	45	56	63	0.13	0.19	0.23	0.34	0.43	0.50	0.58	
	6	Low alloy steel	45	56	58	0.13	0.20	0.24	0.36	0.42	0.46	0.55
	7		41	50	56	0.13	0.16	0.23	0.35	0.41	0.44	0.55
	8		39	47	53	0.09	0.15	0.22	0.28	0.38	0.41	0.50
	9		36	43	46	0.08	0.15	0.21	0.27	0.38	0.40	0.51
	10	High alloyed steel, and tool steel	25	34	36	0.08	0.17	0.20	0.24	0.30	0.37	0.39
	11		19	27	29	0.08	0.14	0.18	0.19	0.25	0.29	0.34
	M	12	Stainless steel	20	23	29	0.12	0.18	0.20	0.24	0.30	0.36
13		20		23	29	0.12	0.18	0.20	0.24	0.30	0.36	0.46
14		24		29	34	0.14	0.20	0.23	0.26	0.36	0.41	0.50
K	15	Grey cast iron	48	58	70	0.14	0.26	0.35	0.45	0.56	0.64	0.68
			29	35	41	0.10	0.15	0.16	0.23	0.28	0.35	0.40
	17	Nodular cast iron	48	58	70	0.14	0.26	0.35	0.45	0.56	0.64	0.68
			35	44	52	0.13	0.17	0.23	0.30	0.35	0.43	0.50
	19	Malleable cast iron	52	64	75	0.16	0.30	0.40	0.49	0.59	0.69	0.75
	20		35	44	52	0.13	0.17	0.23	0.30	0.35	0.43	0.50
N	21	Aluminum-wrought alloy	187	229	244	0.19	0.33	0.41	0.50	0.54	0.64	0.70
			92	137	137	0.19	0.33	0.41	0.46	0.54	0.64	0.70
	27	Copper and Copper Alloys (Bronze / Brass)	95	128	142	0.19	0.31	0.43	0.53	0.64	0.74	0.79
S	31	Heat Resistant Super Alloys	9	11	12	0.08	0.17	0.20	0.24	0.30	0.37	0.39
			8	9	11	0.08	0.14	0.18	0.19	0.25	0.29	0.34
			8	9	11	0.08	0.14	0.18	0.19	0.25	0.29	0.34
			8	9	11	0.08	0.14	0.18	0.19	0.25	0.29	0.34
			8	9	11	0.08	0.14	0.18	0.19	0.25	0.29	0.34
H	38	Hardened steel	20	23	29	0.12	0.18	0.20	0.24	0.30	0.36	0.46

► The recommendations for speeds, feeds and other parameters presented in this chart are nominal recommendations and should be considered only as good starting points.
Speed and feed reductions (20% reduction in speed and 10% reduction in feed) are recommended.

SPADE DRILL HSS M48

Vc = m/min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc			Feed						
			TiN	TiCN	TiAlN	Ø9.5-12.5	Ø13-17.5	Ø18-24	Ø25-35	Ø36-47	Ø48-65	Ø66-114
P	1	Non-alloy steel	54	67	75	0.15	0.22	0.28	0.37	0.46	0.56	0.67
	2		49	58	69	0.13	0.19	0.24	0.34	0.43	0.50	0.57
	3		45	56	63	0.13	0.19	0.23	0.34	0.43	0.50	0.58
	4	45	56	63	0.13	0.19	0.23	0.34	0.43	0.50	0.58	
	6	Low alloy steel	45	56	58	0.13	0.20	0.24	0.36	0.42	0.46	0.55
	7		41	50	56	0.13	0.16	0.23	0.35	0.41	0.44	0.55
	8		39	47	53	0.09	0.15	0.22	0.28	0.38	0.41	0.50
	9		36	43	46	0.08	0.15	0.21	0.27	0.38	0.40	0.51
	10	High alloyed steel, and tool steel	25	34	36	0.08	0.17	0.20	0.24	0.30	0.37	0.39
	11		19	27	29	0.08	0.14	0.18	0.19	0.25	0.29	0.34
	M	12	Stainless steel	20	23	29	0.12	0.18	0.20	0.24	0.30	0.36
13		20		23	29	0.12	0.18	0.20	0.24	0.30	0.36	0.46
14		24		29	34	0.14	0.20	0.23	0.26	0.36	0.41	0.50
K	15	Grey cast iron	48	58	70	0.14	0.26	0.35	0.45	0.56	0.64	0.68
			29	35	41	0.10	0.15	0.16	0.23	0.28	0.35	0.40
	17	Nodular cast iron	48	58	70	0.14	0.26	0.35	0.45	0.56	0.64	0.68
			35	44	52	0.13	0.17	0.23	0.30	0.35	0.43	0.50
	19	Malleable cast iron	52	64	75	0.16	0.30	0.40	0.49	0.59	0.69	0.75
	20		35	44	52	0.13	0.17	0.23	0.30	0.35	0.43	0.50
N	21	Aluminum-wrought alloy	187	229	244	0.19	0.33	0.41	0.50	0.54	0.64	0.70
			92	137	137	0.19	0.33	0.41	0.46	0.54	0.64	0.70
	27	Copper and Copper Alloys (Bronze / Brass)	95	128	142	0.19	0.31	0.43	0.53	0.64	0.74	0.79
S	31	Heat Resistant Super Alloys	9	11	12	0.08	0.17	0.20	0.24	0.30	0.37	0.39
			8	9	11	0.08	0.14	0.18	0.19	0.25	0.29	0.34
			8	9	11	0.08	0.14	0.18	0.19	0.25	0.29	0.34
			8	9	11	0.08	0.14	0.18	0.19	0.25	0.29	0.34
			8	9	11	0.08	0.14	0.18	0.19	0.25	0.29	0.34
H	38	Hardened steel	20	23	29	0.12	0.18	0.20	0.24	0.30	0.36	0.46

► The recommendations for speeds, feeds and other parameters presented in this chart are nominal recommendations and should be considered only as good starting points.
Speed and feed reductions (20% reduction in speed and 10% reduction in feed) are recommended.



RECOMMENDED CUTTING CONDITIONS EMPFOHLENE SCHNEIDKONDITIONEN

SPADE DRILL CARBIDE K10

Vc = m/min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc			Feed				
			TiN	TiCN	TiAlN	Ø9.5~12.5	Ø13~17.5	Ø18~24	Ø25~35	Ø36~47
K	15	Grey cast iron	95	101	125	0.17	0.26	0.32	0.42	0.53
	16		56	70	79	0.13	0.18	0.23	0.28	0.33
	17	Nodular cast iron	95	101	125	0.17	0.26	0.32	0.42	0.53
	18		66	81	93	0.13	0.15	0.28	0.33	0.37
	19	Malleable cast iron	98	125	137	0.18	0.30	0.37	0.46	0.56
	20		66	81	93	0.13	0.15	0.28	0.33	0.37

SPADE DRILL CARBIDE K20

Vc = m/min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc			Feed					
			TiN	TiCN	TiAlN	Ø9.5-12.5	Ø13-17.5	Ø18-24	Ø25-35	Ø36-47	
P	1	Non-alloy steel	94	110	119	0.20	0.24	0.31	0.42	0.46	
	2		76	82	96	0.15	0.22	0.29	0.36	0.40	
	3		66	70	84	0.15	0.22	0.28	0.36	0.40	
	4		66	70	84	0.15	0.22	0.28	0.36	0.40	
	6	Low alloy steel	73	81	88	0.15	0.23	0.29	0.38	0.42	
	7		66	73	81	0.15	0.21	0.28	0.37	0.41	
	8		62	70	78	0.12	0.20	0.27	0.33	0.40	
	9		53	58	64	0.10	0.18	0.23	0.30	0.38	
	10		High alloyed steel, and tool steel	50	56	67	0.09	0.18	0.22	0.28	0.31
	11			37	46	50	0.09	0.18	0.22	0.28	0.31
	12			38	43	47	0.10	0.18	0.20	0.24	0.30
M	13	Stainless steel	38	43	47	0.10	0.18	0.20	0.24	0.30	
	14		43	49	55	0.12	0.20	0.23	0.27	0.35	
K	15	Grey cast iron	95	101	125	0.17	0.26	0.32	0.42	0.53	
	16		56	70	79	0.13	0.18	0.23	0.28	0.33	
	17	Nodular cast iron	95	101	125	0.17	0.26	0.32	0.42	0.53	
	18		66	81	93	0.13	0.15	0.28	0.33	0.37	
	19	Malleable cast iron	98	125	137	0.18	0.30	0.37	0.46	0.56	
	20		66	81	93	0.13	0.15	0.28	0.33	0.37	
N	21	Aluminum-wrought alloy	366	396	427	0.24	0.38	0.45	0.50	0.53	
	22	244	290	291	0.22	0.33	0.40	0.45	0.48		
	27	Copper and Copper Alloys (Bronze / Brass)	136	168	193	0.15	0.24	0.29	0.39	0.47	
S	31	Heat Resistant Super Alloys	50	55	62	0.19	0.19	0.21	0.24	0.30	
	32		38	44	46	0.15	0.17	0.20	0.21	0.25	
	33		38	44	46	0.15	0.17	0.20	0.21	0.25	
	34		38	44	46	0.15	0.17	0.20	0.21	0.25	
	35		38	44	46	0.15	0.17	0.20	0.21	0.25	
H	38	Hardened steel	38	43	47	0.10	0.18	0.20	0.24	0.30	

► The recommendations for speeds, feeds and other parameters presented in this chart are nominal recommendations and should be considered only as good starting points. Speed and feed reductions (20% reduction in speed and 10% reduction in feed) are recommended.



RECOMMENDED CUTTING CONDITIONS EMPFOHLENE SCHNEIDKONDITIONEN

SPADE DRILL FLAT BOTTOM HSS T15

Vc = m/min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc		Feed			
			TiN	TiAlN	Ø9.5-12.5	Ø13-17.5	Ø18-24	Ø25-35
P	1	Non-alloy steel	54	60	0.12	0.18	0.22	0.30
	2		46	55	0.10	0.15	0.19	0.27
	3		45	50	0.10	0.15	0.18	0.27
	4		42	46	0.08	0.14	0.17	0.22
	6	Low alloy steel	45	46	0.10	0.16	0.19	0.29
	7		40	45	0.10	0.13	0.18	0.28
	8		38	42	0.07	0.12	0.18	0.22
	9		34	37	0.06	0.12	0.17	0.22
	10		27	29	0.07	0.12	0.15	0.20
	11	High alloyed steel, and tool steel	22	23	0.07	0.12	0.15	0.20
	M	12	Stainless steel	23	25	0.13	0.15	0.18
13		23		25	0.13	0.15	0.18	0.22
14		26		29	0.17	0.18	0.20	0.23
K	15	Grey cast iron	51	60	0.12	0.21	0.29	0.40
	16		38	48	0.10	0.14	0.20	0.25
	17	Nodular cast iron	51	60	0.12	0.21	0.29	0.40
	18		38	48	0.10	0.14	0.20	0.25
	19	Malleable cast iron	56	66	0.13	0.25	0.35	0.41
20	38		48	0.10	0.14	0.20	0.25	
N	21	Aluminum-wrought alloy	208	213	0.17	0.28	0.36	0.43
	22	112	121	0.17	0.28	0.36	0.41	
	27	Copper and Copper Alloys (Bronze / Brass)	48	70	0.15	0.26	0.37	0.45
S	31	Heat Resistant Super Alloys	20	10	0.06	0.14	0.16	0.19
	32		7	9	0.06	0.11	0.14	0.15
	33		7	9	0.06	0.11	0.14	0.15
	34		7	9	0.06	0.11	0.14	0.15
	35		7	9	0.06	0.11	0.14	0.15
H	38	Hardened steel	23	25	0.13	0.15	0.18	0.22

► The recommendations for speeds, feeds and other parameters presented in this chart are nominal recommendations and should be considered only as good starting points. Speed and feed reductions (20% reduction in speed and 10% reduction in feed) are recommended.

SPADE DRILL CARBIDE P40

Vc = m/min,
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc			Feed				
			TiN	TiCN	TiAlN	Ø9.5-12.5	Ø13-17.5	Ø18-24	Ø25-35	Ø36-47
P	1	Non-alloy steel	94	110	119	0.20	0.24	0.31	0.42	0.46
	2		76	82	96	0.15	0.22	0.29	0.36	0.40
	3		66	70	84	0.15	0.22	0.28	0.36	0.40
	4		66	70	84	0.15	0.22	0.28	0.36	0.40
	6	Low alloy steel	73	81	88	0.15	0.23	0.29	0.38	0.42
	7		66	73	81	0.15	0.21	0.28	0.37	0.41
	8		62	70	78	0.12	0.20	0.27	0.33	0.40
	9		53	58	64	0.10	0.18	0.23	0.30	0.38
	10	High alloyed steel, and tool steel	50	56	67	0.09	0.18	0.22	0.28	0.31
	11		37	46	50	0.09	0.18	0.22	0.28	0.31
	M	12	Stainless steel	38	43	47	0.10	0.18	0.20	0.24
13		38		43	47	0.10	0.18	0.20	0.24	0.30
14		43		49	55	0.12	0.20	0.23	0.27	0.35
K	15	Grey cast iron	95	101	125	0.17	0.26	0.32	0.42	0.53
	16		56	70	79	0.13	0.18	0.23	0.28	0.33
	17	Nodular cast iron	95	101	125	0.17	0.26	0.32	0.42	0.53
	18		66	81	93	0.13	0.15	0.28	0.33	0.37
	19		Malleable cast iron	98	125	137	0.18	0.30	0.37	0.46
20	66	81		93	0.13	0.15	0.28	0.33	0.37	
N	21	Aluminum-wrought alloy	366	396	427	0.24	0.38	0.45	0.50	0.53
	22		244	290	291	0.22	0.33	0.40	0.45	0.48
27	Copper and Copper Alloys (Bronze / Brass)	136	168	193	0.15	0.24	0.29	0.39	0.47	
S	31	Heat Resistant Super Alloys	50	55	62	0.19	0.19	0.21	0.24	0.30
	32		38	44	46	0.15	0.17	0.20	0.21	0.25
	33		38	44	46	0.15	0.17	0.20	0.21	0.25
	34		38	44	46	0.15	0.17	0.20	0.21	0.25
	35		38	44	46	0.15	0.17	0.20	0.21	0.25
H	38	Hardened steel	38	43	47	0.10	0.18	0.20	0.24	0.30

► The recommendations for speeds, feeds and other parameters presented in this chart are nominal recommendations and should be considered only as good starting points. Speed and feed reductions (20% reduction in speed and 10% reduction in feed) are recommended.